



Air Compressors Air Tools & Accessories





1/2HP Mini Air Compressor

| Model | A1644 | A1645 |
|---------------|-----------|-------------------|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 0.75 KW | 1/2 HP |
| Speed | 1,750 rpm | 1,750 rpm |
| Air Delivery | 130 l/min | 4.5 cfm at 50 PSI |
| Max. Pressure | 3.5 bar | 50 PSI |
| Certificate | CE | |



1.0HP Direct Drive Air Compressor (6L, 2 Gallon)

| Model | T81210 | T81250 |
|---------------|--|--|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 0.75 KW | 1.5 HP |
| Speed | 2,800 rpm | 3,300 rpm |
| Tank | 6 L | 2 Gallon |
| Air Delivery | 71 l/min at 40 PSI 51 l/min at 90 PSI | 3.3 cfm at 40 PSI 2.4 cfm at 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE, GS, ENC, ROHS | CUL |



2.5HP Direct Drive Air Compressor (25L, 6-1/2 Gallon)

| Model | T81211 | T81251 |
|---------------|--|---|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 1.8 KW | 2.5 HP |
| Speed | 2,800 rpm | 3,400 rpm |
| Tank | 25 L | 6.5 Gallon |
| Air Delivery | 165 l/min at 40 PSI 125 l/min at 90 PSI | 5.89 cfm at 40 PSI 4.6 cfm at 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE, GS, ENC, ROHS | CUS |



3HP V-Type Direct Drive Air Compressor (50L, 13 Gallon)

| Model | T81217 | T81257 |
|---------------|--|--|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 2.2 KW | 3 HP |
| Speed | 2,800 rpm | 3,400 rpm |
| Tank | 50 L | 13 Gallon |
| Air Delivery | 212 l/min to 40 PSI 184 l/min to 90 PSI | 8.6 cfm to 40 PSI 7.6 cfm to 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE, GS, ENC, ROHS | ASME |

2HP Belt Drive Air Compressor (32L, 8 Gallon)

| Model | T81220 | T81260 |
|---------------|--|--|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 1.5 KW, 2 Pole Single Phase | 2 HP, 2 Pole Single Phase |
| Speed | 2,800 rpm | 3,400 rpm |
| Tank | 32 L | 8.0 Gallon |
| Air Delivery | 224 l/min at 40 PSI 180 l/min at 90 PSI | 8.2 cfm at 40 PSI 6.6 cfm at 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE | ASME |



3HP Belt Drive Air Compressor (50L, 13 Gallon)

| Model | T81222 | T81262 |
|---------------|--|--|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 2.2 KW 2 Pole, Single Phase | 3 HP 2 Pole, Single Phase |
| Speed | 2,800 rpm | 3,400 rpm |
| Tank | 50 L | 13 Gallon |
| Air Delivery | 385 l/min at 40 PSI 320 l/min at 90 PSI | 14.5 cfm at 40 PSI 12.3 cfm at 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE | ASME |



3HP Belt Drive Air Compressor (50L, 13 Gallon)

| Model | T81221 | T81261 |
|---------------|--|---|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 2.2 KW 2 Pole, Single Phase | 3 HP, 2 Pole Single Phase |
| Speed | 2,800 rpm | 3,400 rpm |
| Tank | 50 L | 13 Gallon |
| Air Delivery | 280 l/min at 40 PSI 220 l/min at 90 PSI | 10.8 cfm at 40 PSI 8.0 cfm at 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE | ASME |





5.5HP Belt Drive Air Compressor (32L, 8 Gallon)

| Model | T81230 | T81270 |
|-------------------|---------------------|--------------------|
| Displacement | 163 ml | 163 ml |
| Max. Power | 4 KW / 3,600 rpm | 4 KW / 3,600 rpm |
| Ignition System | CDI | CDI |
| Starting System | Manual | Manual |
| Recommended Power | 3.4 KW / 3,600 rpm | 3.4 KW / 3,600rpm |
| Rated Speed | 3,600 rpm | 3,600 rpm |
| Air Delivery | 335 l/min at 40 PSI | 12.5 cfm at 40 PSI |
| | 250 l/min at 90 PSI | 9.1 cfm at 90 PSI |
| Tank | 32 L | 8 Gallon |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE, EU | EPA, CARB, ASME |



7.5HP Belt Drive Air Compressor (250L, 66 Gallon)

| Model | T81223 | T81263 |
|---------------|---------------------|------------------|
| Voltage | 415 V | 220 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 5.5 KW | 7.5 HP |
| | Three Phase | Three Phase |
| Speed | 900 rpm | 900 rpm |
| Tank | 250 L | 66 Gallon |
| Air Delivery | 680 l/min at 40 PSI | 24 cfm at 40 PSI |
| | 566 l/min at 90 PSI | 20 cfm at 90 PSI |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE | ASME |



8.0HP Belt Drive Air Compressor (50L, 13 Gallon)

| Model | T81231 | T81271 |
|-------------------|---------------------|--------------------|
| Displacement | 242 ml | 242 ml |
| Max. Power | 5.8 KW / 3,600 rpm | 5.8KW / 3,600 rpm |
| Ignition System | CDI | CDI |
| Starting System | Manual | Manual |
| Recommended Power | 5.1 KW / 3,600 rpm | 5.1 KW / 3,600 rpm |
| Rated Speed | 3,600 rpm | 3,600rpm |
| Air Delivery | 320 l/min at 40 PSI | 22.5 cfm at 40 PSI |
| | 250 l/min at 90 PSI | 16.7 cfm at 90 PSI |
| Tank | 50 L | 13 Gallon |
| Max. Pressure | 8 bar | 115 PSI |
| Certificate | CE, EU | EPA, CARB, ASME |

2.5HP Vertical Air Compressor (60L, 15 Gallon)

| Model | T81240 | T81280 |
|---------------|---------------------|-------------------|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 1.8KW | 2HP |
| Speed | 2,800 rpm | 3,300 rpm |
| Tank | 60 L | 15 Gallon |
| Air Delivery | 170 l/min at 40 PSI | 5.0 cfm at 40 PSI |
| | 143 l/min at 90 PSI | 4.0 cfm at 90 PSI |
| Max. Pressure | 8.8 bar | 125 PSI |
| Certificate | GS, CE, ENC, ROHS | CUL, ASME |



5HP Belt Drive Vertical Air Compressor (100L, 27 Gallon)

| Model | T81241 | T81281 |
|---------------|---------------------|-------------------|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 2.2 KW | 3 HP |
| Speed | 2,850 rpm | 3,450 rpm |
| Tank | 100 L | 27 Gallon |
| Air Delivery | 348 l/min at 40 PSI | 13 cfm at 40 PSI |
| | 260 l/min at 90 PSI | 9.7 cfm at 90 PSI |
| Max. Pressure | 8.8 bar | 125 PSI |
| Certificate | CE | ASME |



5.5HP Belt Drive Vertical Air Compressor (250L, 66 Gallon)

| Model | T81242 | T81282 |
|---------------|---------------------|--------------------|
| Voltage | 230 V | 115 V |
| Frequency | 50 Hz | 60 Hz |
| Motor | 4.0 KW | 5.5 HP |
| Speed | 2,850 rpm | 3,450 rpm |
| Tank | 250 L | 66 Gallon |
| Air Delivery | 410 l/min at 40 PSI | 13.3 cfm at 40 PSI |
| | 385 l/min at 90 PSI | 11.6 cfm at 90 PSI |
| Max. Pressure | 12.0 bar | 165 PSI |
| Certificate | CE | ASME |





A4120 1/4" Dr. Professional Air Ratchet

- Compact head design for trim work, dash boards and smaller engines
- Reaches confined areas where impact wrenches can't reach
- Ball and needle bearing construction

| | |
|----------------------|----------------------|
| Bolt Capacity | 5/16" (8mm) |
| Free Speed | 240 rpm |
| Max. Torque | 18 ft/lb (24.4 N.m.) |
| Avg. Air Consumption | 3 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4128 3/8" Dr. Mini Air Ratchet

- 8-1/3" (212mm) Mini ratchet designed to fit into tight spaces
- Ball and needle bearing construction
- Rear exhaust outlet
- Composite handle reduces vibration

| | |
|----------------------|-----------------------|
| Bolt Capacity | 3/8" (10mm) |
| Free Speed | 160 rpm |
| Max. Torque | 50 ft/lbs (67.8 N.m.) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4142 1/2" Dr. Mini Air Ratchet

- 8-1/3" (220mm) Mini ratchet designed to fit into tight spaces
- Ideal tool for exhaust system and body shop repair work
- Ball retainer for positive socket retention
- Ball and needle bearing construction
- Composite handle reduces vibration

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1/2" (13mm) |
| Free Speed | 160 rpm |
| Max. Torque | 50 ft/lbs (67.8 N.m.) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4131 3/8" Dr. Air Ratchet

- Ideal tool for exhaust system and body shop repair work
- Ball retainer for positive socket retention
- Ball and needle bearing construction
- Composite handle reduces vibration

| | |
|----------------------|-----------------------|
| Bolt Capacity | 3/8" (10mm) |
| Free Speed | 160 rpm |
| Max. Torque | 50 ft/lbs (67.8 N.m.) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A4140 1/2" Dr. Air Ratchet

- Ideal tool for exhaust system and body shop repair work
- Ball retainer for positive socket retention
- Ball and needle bearing construction
- Composite handle reduces vibration

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1/2" (13mm) |
| Free Speed | 160rpm |
| Max. Torque | 50 ft/lbs (67.8 N.m.) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4144 1/2" Dr. High Torque Air Ratchet

- Heavy duty fiber composite body for performance and long life
- Composite handle reduces vibration
- Built-in swivel 360-degree exhaust design directs air away from work surface

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1/2" (13mm) |
| Free Speed | 225 rpm |
| Max. Torque | 100 ft/lbs (136 N.m.) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4122 1/4" Dr. Stubby Air Ratchet

- 5" (120mm) Mini ratchet designed to fit into tight spaces
- Lever throttle for variable speed control
- Ball and needle bearing construction
- Rear exhaust outlet

| | |
|----------------------|---------------------|
| Bolt Capacity | 5/16" (8mm) |
| Free Speed | 260 rpm |
| Max. Torque | 20 ft/lbs (27 N.m.) |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/2" ID |



A4129 3/8" Dr. Stubby Air Ratchet

- 5" (120mm) Mini ratchet designed to fit into tight spaces
- Lever throttle for variable speed control
- Ball and needle bearing construction
- Rear exhaust outlet

| | |
|----------------------|---------------------|
| Bolt Capacity | 3/8" (10mm) |
| Free Speed | 260 rpm |
| Max. Torque | 20 ft/lbs (27 N.m.) |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/2" ID |





(Bit not included)

A4125 2-in-1 3/8" Dr. Stubby Air Ratchet & Bit Driver

- 5" (120mm) mini ratchet designed to fit into tight spaces
- Lever throttle for variable speed control
- Ball and needle bearing construction
- Rear exhaust outlet

| | |
|----------------------|---------------------|
| Bolt Capacity | 3/8" (10mm) |
| Free Speed | 260 rpm |
| Max. Torque | 20 ft/lbs (27 N.m.) |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/2" ID |



A4135 3/8" Dr. High Torque Air Ratchet

- Ideal tool for exhaust system
- Ball retainer for positive socket retention
- Ball and needle construction

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1-5/16" (33mm) |
| Free Speed | 350 rpm |
| Max. Torque | 74 ft/lbs (100 N.m.) |
| Avg. Air Consumption | 8.825 cfm (250 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4143 1/2" Dr. High Torque Air Ratchet

- Ideal tool for exhaust system
- Ball retainer for positive socket retention
- Ball and needle construction

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1-5/16" (33mm) |
| Free Speed | 350 rpm |
| Max. Torque | 74 ft/lbs (100 N.m.) |
| Avg. Air Consumption | 8.825 cfm (250 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3630 3/8" Dr. Butterfly Impact Wrench

- Ideal for small engine work in tight places
- Built-in regulator for complete speed control
- Air inlet swivels 360 degrees
- Single-handed forward and reverse power control

| | |
|--------------------------|------------------------|
| Bolt Capacity | 7/16" (11mm) |
| Free Speed | 10,000 rpm |
| Maximun Torque | 75 ft/lbs (101.7 N.m.) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Recommended Air Pressure | 90 PSI |
| Minimum Hose Size | 3/8" ID |



A3638 3/8" Dr. Super Duty Impact Wrench

- Single hammer impact mechanism for removing and replacing bolts easily
- More torque, less vibration
- Pistol-grip design, compact and lightweight
- Built-in positive action regulator, handle exhaust

| | |
|----------------------|----------------------|
| Bolt Capacity | 7/16" (11mm) |
| Free Speed | 10,000 rpm |
| Max. Torque | 180 ft/lb (271 N.m.) |
| Avg. Air Consumption | 2.5 cfm (70.8 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3646 1/2" Dr. Lightweight Air Impact Wrench (Twin Hammer)

- Twin hammer mechanism for high torque performance
- Pistol grip design with non-slip sleeve in handle

| | |
|----------------------|-----------------------|
| Bolt Capacity | 3/4" (19mm) |
| Free Speed | 11,000 rpm |
| Max. Torque | 400 ft/lbs (542 N.m.) |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3641 1/2" Dr. Air Impact Wrench (Rocking Dog)

- Ideal tool for general purpose tire and transmission assembly work
- Single-handed forward and reverse power control
- Durable rocking dog clutch design
- Built-in air regulator for positive speed and torque control
- Vinyl boot protects tool against damage

| | |
|----------------------|-----------------------|
| Bolt Capacity | 5/8" (16mm) |
| Free Speed | 7,000 rpm |
| Max. Torque | 280 ft/lbs (380 N.m.) |
| Avg. Air Consumption | 4.5 cfm (127 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |




A3649 1/2" Dr. Air Impact Wrench (Twin Hammer)

- Twin Hammer mechanism for high torque performance
- Super duty 1/2" impact wrench rated for industrial use
- Pistol grip design with non-slip sleeve in handle
- Rear exhaust directs air away from work surface

| | |
|----------------------|-----------------------|
| Bolt Capacity | 3/4" (19mm) |
| Free speed | 7,000 rpm |
| Max. Torque | 460 ft/lbs (620 N.m.) |
| Avg. Air Consumption | 6.0 cfm (170 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |


A3651 1/2" Dr. Air Impact Wrench (Twin Hammer)

- Twin Hammer mechanism for high torque performance
- Super duty 1/2" impact wrench rated for industrial use
- Pistol grip design with non-slip sleeve in handle
- Front exhaust outlet

| | |
|----------------------|-----------------------|
| Bolt Capacity | 3/4" (19mm) |
| Free Speed | 8,000 rpm |
| Max. Torque | 460 ft/lbs (620 N.m.) |
| Avg. Air Consumption | 4 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |


A3652 1/2" Dr. Extended Anvil Air Impact Wrench (Twin Hammer)
A3655 1/2" Dr. Air Impact Wrench (Twin Hammer)

- Twin hammer mechanism for high power, speed, and durability
- Heavy duty to perform the toughest jobs with ease
- One-hand push button forward/reverse
- Adjustable power regulator
- Bottom exhaust directs air away from work area

| | |
|----------------------|-------------------------|
| Bolt Capacity | 3/4" (19mm) |
| Free Speed | 6,500 rpm |
| Max. Torque | 600 ft/lbs (813.5 N.m.) |
| Avg. Air Consumption | 4.4 cfm (125 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3634 3/8" Dr. Lightweight Air Impact Wrench (Twin Hammer)

- Heavy duty fiber composite body for performance and long life
- Lightweight compact design
- Twin hammer mechanism for high torque performance
- Bottom exhaust directs air away from work surface

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1/2" (13mm) |
| Free Speed | 10,000 rpm |
| Max. Torque | 280 ft/lbs (380 N.m.) |
| Avg. Air Consumption | 10.6 cfm (300 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3639 1/2" Mini Air Impact Wrench (Twin Hammer)

- Heavy duty fiber composite body for performance and long life
- Lightweight compact design
- Twin hammer mechanism designed for high torque performance
- Bottom exhaust directs air away from work surface

| | |
|----------------------|-----------------------|
| Bolt Capacity | 1/2" (13mm) |
| Free Speed | 10,000 rpm |
| Max. Torque | 320 ft/lbs (434 N.m.) |
| Avg. Air Consumption | 10.6 cfm (300 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3640 1/2" Dr. Air Impact Wrench (Twin Hammer)

- Heavy duty fiber composite body for performance and long life
- Lightweight compact design
- Twin hammer mechanism designed for high torque performance
- Bottom exhaust directs air away from work surface

| | |
|----------------------|-----------------------|
| Bolt Capacity | 5/8" (16mm) |
| Free Speed | 10,000 rpm |
| Max. Torque | 750 ft/lbs (950 N.m.) |
| Avg. Air Consumption | 13 cfm (368 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A3659 3/4" Dr. Mini Air Impact Wrench (Twin Hammer)

- Heavy duty fiber composite body for performance and long life
- Lightweight design for added comfort
- Twin hammer mechanism design for high torque performance
- Bottom exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1" (26mm) |
| Free Speed | 9,000 rpm |
| Max. Torque | 1,000 ft/lbs (1,356 N.m.) |
| Avg. Air Consumption | 13.7 cfm (388 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3664 3/4" Dr. Air Impact Wrench (Twin Hammer)

- Durable twin hammer mechanism for engine teardowns and general maintenance
- High performance, lightweight and easy to operate
- Steel hammer case provides maximum protection
- Forward and reverse, adjustable torque control
- Front exhaust outlet

| | |
|----------------------|-------------------------|
| Bolt Capacity | 1" (25mm) |
| Free Speed | 6,500 rpm |
| Max. Torque | 750 ft/lbs (1,016 N.m.) |
| Avg. Air Consumption | 7.0 cfm (198 l/min) |
| Air Pressure | 90PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3666 3/4" Dr. Heavy Duty Air Impact Wrench (Twin Hammer)

- Durable twin hammer mechanism for engine teardowns and general maintenance
- High performance, lightweight and easy to operate
- Steel hammer case provides maximum protection
- Forward and reverse, adjustable torque control
- Bottom exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-1/4" (32mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,200 ft/lbs (1,627 N.m.) |
| Avg. Air Consumption | 7.6 cfm (215 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3670 3/4" Dr. Super Duty Air Impact Wrench (Twin Hammer)

- Durable twin hammer mechanism for engine teardowns and general maintenance
- High performance, lightweight and easy to operate
- Steel hammer case provides maximum protection
- Forward and reverse, adjustable torque control
- Bottom exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-3/16" (30mm) |
| Free Speed | 5,500 rpm |
| Max. Torque | 1,100 ft/lbs (1,491 N.m.) |
| Avg. Air Consumption | 9.5 cfm (269 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 3/8" NPT (PT) |
| Hose Size | 1/2" ID |



A3668 3/4" Dr. Heavy Duty Air Impact Wrench (Pin Clutch)

- Durable twin hammer mechanism for engine teardowns and general maintenance
- High performance, lightweight and easy to operate
- Steel hammer case provides maximum protection
- Forward and reverse, adjustable torque control
- Bottom exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-1/4" (32mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,100 ft/lbs (1,493 N.m.) |
| Avg. Air Consumption | 7.6 cfm (215 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3675 1" Dr. Lightweight Air Impact Wrench (Pin Clutch)

- Compact and lightweight design provides durability and power for added performance
- Extended 6" anvil for hard-to-reach applications
- Handle exhaust directs air away from work surface
- Front exhaust outlet

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-1/2" (38mm) |
| Free Speed | 4,500 rpm |
| Max. Torque | 1,300 ft/lbs (1,765 N.m.) |
| Avg. Air Consumption | 14.5 cfm (411 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A3687 1" Dr. Super Duty Impact Wrench (Twin Hammer)

- Durable twin hammer impact mechanism
- Provides extra power without extra weight
- Exhaust outlet directs air away from operator for maximum safety
- Front exhaust outlet

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-27/64" (36mm) |
| Free speed | 4,000 rpm |
| Max. Torque | 1,500 ft/lbs (2,033 N.m.) |
| Avg. Air Consumption | 9.0 cfm (255 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3676 1" Dr. Super Duty Impact Wrench (Twin Hammer)

- Durable twin hammer impact mechanism
- Provides extra power without extra weight
- Exhaust outlet directs air away from operator for maximum safety

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-27/64" (36mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,500 ft/lbs (2,033 N.m.) |
| Avg. Air Consumption | 9.0 cfm (255 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3677 1" Dr. Super Duty Impact Wrench w/ 6" Anvil (Twin Hammer)

- Extended anvil wrench easily reaches into deep truck wheels
- Designed for high performance truck tire changing
- Handle exhaust directs air away from work surface
- Twin hammer impact mechanism

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-27/64" (36mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,500 ft/lbs (2,033 N.m.) |
| Avg. Air Consumption | 9.0 cfm (255 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |

A3678 1" Dr. Super Duty Impact Wrench w/ 6" Anvil (Twin Hammer)

- Durable twin hammer impact mechanism
- Side exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-1/2" (38mm) |
| Free speed | 4,000 rpm |
| Max. Torque | 1,800 ft/lbs (2,440 N.m.) |
| Avg. Air Consumption | 9.0 cfm (255 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3682 1" Dr. Super Duty Impact Wrench

- Heavy duty twin hammer construction for greater power and durability
- Supported ring socket retainer
- Easy access reverse lever
- Ideal for heavy duty truck tire service work
- Bottom exhaust directs air away from work surface

| | |
|----------------------|--------------------------|
| Bolt Capacity | 1-5/8" (41mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,800 ft/lbs (2440 N.m.) |
| Avg. Air Consumption | 11 cfm (312 l/min) |
| Air Pressure | 90 - 115 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 1/2" ID |



A3681 1" Dr. Super Duty Impact Wrench w/ 8" Anvil

- Extended anvil wrench easily reaches into deep truck wheels
- Designed for high performance truck tire changing
- Bottom exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-3/4" (45mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,800 ft/lbs (2,440 N.m.) |
| Avg. Air Consumption | 12 cfm (340 l/min) |
| Air Pressure | 90 - 115 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 1/2" ID |





A3679 1" Dr. Super Duty Impact Wrench (Twin Hammer)

- Extended anvil wrench easily reaches into deep truck wheels
- Designed for high performance truck tire changing
- Handle exhaust directs air away from work surface

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-1/2" (38mm) |
| Free Speed | 4,000 rpm |
| Max. Torque | 1,800 ft/lbs (2,440 N.m.) |
| Avg. Air Consumption | 9.0 cfm (255 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3685 1" Dr. Super Duty Impact Wrench (Twin Hammer)

- Twin hammer impact mechanism
- Provides extra power without extra weight
- Exhaust outlet directs air away from operator for maximum safety

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-25/32" (45mm) |
| Free speed | 3,000 rpm |
| Max. Torque | 2,500 ft/lbs (3,388 N.m.) |
| Avg. Air Consumption | 14.5 cfm (410 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3686 1" Dr. Super Duty Impact Wrench w/8" Anvil (Twin Hammer)

- Extended anvil wrench easily reaches into deep truck wheels
- Designed for high performance truck tire changing
- Exhaust outlet directs air away from operator for maximum safety
- Twin hammer impact mechanism

| | |
|----------------------|---------------------------|
| Bolt Capacity | 1-25/32" (45mm) |
| Free Speed | 3,000 rpm |
| Max. Torque | 2,500 ft/lbs (3,388 N.m.) |
| Avg. Air Consumption | 14.5 cfm (410 l/min) |
| Air Pressure: | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3691 1-1/2" Dr. Super Duty Impact Wrench (Twin Hammer)

- Provides extra power without extra weight
- Exhaust outlet directs air away from operator for maximum safety
- Twin hammer impact mechanism

| | |
|----------------------|---------------------------|
| Bolt Capacity | 2" (50mm) |
| Free Speed | 3,000 rpm |
| Max. Torque | 3,000 ft/lbs (4,066 N.m.) |
| Avg. Air Consumption | 16 cfm (453 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |



A3693 1-1/2" Dr. Super Duty Impact Wrench w/ 8" Anvil (Twin Hammer)

- Extended anvil wrench easily reaches into deep truck wheels
- Designed for high performance truck tire changing
- Exhaust outlet directs air away from operator for maximum safety
- Twin hammer impact mechanism

| | |
|----------------------|---------------------------|
| Bolt Capacity | 2" (50mm) |
| Free Speed | 3,000 rpm |
| Max. Torque | 3,000 ft/lbs (4,066 N.m.) |
| Avg. Air Consumption | 16 cfm (453 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 3/4" ID |





A3014 Mini Air Angle Die Grinder

- Compact design with 90° angled head for easy access
- Capable of using carbide burs and other attachments for polishing, porting and light metal removal
- Composite handle reduces vibration
- Lever throttle for feathering control

| | |
|----------------------|--------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 18,000 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3015 Air Angle Die Grinder

- Ideal for high speed grinding and polishing
- Finishes dies and metal molds, smooths and shapes sheet metal and cast iron, weld finishes and other high speed polishing applications
- Lever throttle for feathering control

| | |
|----------------------|--------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 18,000 rpm |
| Avg. Air Consumption | 3.0 cfm (80 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3017 Gearless Air Angle Die Grinder

- Heavy duty fiber composite body for performance and durability
- Unique gearless mechanism for longer tool life
- Accurately grinds, smooths and finishes
- Rear exhaust directs air away from work surface
- Lever throttle for feathering control

| | |
|----------------------|---------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 25,000 rpm |
| Avg. Air Consumption | 4.5 cfm (127 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3019 1HP Air Angle Die Grinder (Extreme Duty)

- Powerful, heavy duty 90° angle head construction
- Ideal for heavy welding, grinding, porting and polishing applications
- Lever throttle for feathering control
- Rear exhaust directs air away from work surface

| | |
|----------------------|---------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 12,000 rpm |
| Avg. Air Consumption | 4.5 cfm (127 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3016 Offset Air Angle Die Grinder

- 115-Degree offset design works in confined areas
- Finishes dies and metal molds, smooths and shapes sheet metal and cast iron, weld finishes and other high speed polishing applications
- Lever throttle for feathering control

| | |
|----------------------|--------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 18,000 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3028 Gearless Angle Head Die Grinder and 2" Angle Sander

- Accurately grinds, smooths and finishes rough areas when space is limited
- Perfect for touch-up and production sanding
- Unique gearless mechanism for longer tool life
- Rear exhaust directs air away from work surface

| | |
|----------------------|-----------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 25,000 rpm |
| Avg. Air Consumption | 4 - 6 cfm (170 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3026 1/4" Mini Die Grinder

- Grinds, smooths and finishes rough areas when space is limited
- Ball bearing construction for longer tool life
- Rear exhaust directs air away from work surface
- Throttle lever enables positive speed control

| | |
|----------------------|---------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 25,000 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3020 Mini Air Die Grinder

- Ideal for light welding, grinding, porting and polishing applications
- High precision tool with spindle centricity less than 0.05mm
- Ergonomic cushioned grip handle
- Lever throttle for feathering control

| | |
|----------------------|--------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 25,000 rpm |
| Avg. Air Consumption | 2.1 cfm (60 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A3033 Air Die Grinder

- Ideal for many automotive and industrial high speed grinding applications
- Cleans dies, rotors and brake pad mounts
- Can use with 1/4" (6mm) or 1/8" (3mm) grinding accessories
- Ergonomic cushioned grip
- Lever throttle for feathering control

| | |
|----------------------|--------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 22,000 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3034 Air Die Grinder (Industrial Grade)

- Ideal for heavy duty automotive and industrial high speed grinding applications
- Cleans dies, rotors and brake pad mounts
- Ergonomic cushioned grip

| | |
|----------------------|---------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 20,000 rpm |
| Avg. Air Consumption | 9.8 cfm (280 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3035 1HP Air Gearless Angle Die Grinder (Extreme Duty)

- Compact and lightweight
- Lever throttle for feathering control
- Rear exhaust directs air away from work surface

| | |
|----------------------|---------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 20,000 rpm |
| Avg. Air Consumption | 4.5 cfm (127 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3037 Extended Air Die Grinder

- High speed grinding and polishing in hard-to-reach areas
- Extended reach of 6"
- Use with 1/4" (6mm) or 1/8" (3mm) grinding accessories
- Ergonomic cushioned grip
- Lever throttle for feathering control

| | |
|----------------------|--------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 22,000 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3038 Extended Air Die Grinder (Extreme Duty)

- High speed grinding and polishing in hard-to-reach areas
- Ergonomic cushioned grip

| | |
|----------------------|---------------------|
| Collet Size | 1/4" (6mm) |
| Free Speed | 30,000 rpm |
| Avg. Air Consumption | 7.0 cfm (200 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A6313 Air Die Grinder Kit

- Cleans, deburs, blends and grinds metal fabrication, maintenance, production, and tool and die applications
- Includes five 1/4" and five 1/8" grinding stones, collet spanners, 1/8" collect insert and a plastic case
- Composite handle reduces vibration and insulates the operator from cold housing
- Ball bearing construction for long life
- Lever throttle for feathering control

| | |
|----------------------|------------------------|
| Collet Size | 1/4" (6mm), 1/8" (3mm) |
| Free Speed | 22,000 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A6314 Mini Air Angle Die Grinder Kit

- Grinds, deburs, polishes and smooths rough areas
- Ball bearing construction for advanced durability
- Rear exhaust directs air away from work surface
- Lever throttle for feathering control
- Includes an assortment of grinding stones, disc pad, extra collet and collet spanners

| | |
|----------------------|------------------------|
| Collet Size | 1/4" (6mm), 1/8" (3mm) |
| Free Speed | 20,000 rpm |
| Avg. Air Consumption | 2.1 cfm (60 l/min) |
| Backing Pad | 3" (75mm) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3001 Mini Air Micro Die Grinder

- Grinds, deburs, polishes and smooths rough areas
- Ideal for tight spots
- Designed for high speed porting and finishing of small parts

| | |
|----------------------|---------------------|
| Collet Size | 1/8" (3mm) |
| Free Speed | 65,000 rpm |
| Avg. Air Consumption | 2.65 cfm (75 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3000 Mini Air Micro Die Grinder

- Collet Size: 3/32" (2.4mm)



A3002 Precision Air Micro Die Grinder

- Grinds, deburs and smooths rough areas
- Ball bearing construction for advanced durability
- Rear exhaust directs air away from work surface
- Lightweight and easy to use
- Built-in silencer for quiet operation

| | |
|----------------------|---------------------|
| Collet Size | 1/8" (3mm) |
| Free Speed | 54,000 rpm |
| Avg. Air Consumption | 0.85 cfm (24 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3003 Precision Air Micro Die Grinder

- 110° Angle head design
- Ideal for tight spots
- Designed for high speed porting and finishing of small parts
- Blow molded case for easy storage and transportation

| | |
|----------------------|----------------------|
| Collet Size | 1/8" (3mm) |
| Free Speed | 70,000 rpm |
| Avg. Air Consumption | 1.0 cfm (28.3 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3039 Industrial Straight Air Grinder

- Heavy duty, double-row ball bearings ensure long life and smooth operation
- Self-locking throttle lever prevents accidental operation
- Rear exhaust directs air away from work surface

| | |
|----------------------|----------------------|
| Grind Size | φ75 x φ9.5 x 13mm |
| Free Speed | 13,500 rpm |
| Avg. Air Consumption | 8.12 cfm (230 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3070 7" Air Angle Grinder

- Ideal for both light and heavy duty applications
- Automatic throttle release
- Ball bearing balanced construction for vibration-free performance

| | |
|----------------------|----------------------|
| Wheel Size | 7" (175mm) |
| Spindle Thread | 5/8" - 11 (M14) |
| Max Speed | 7,000 rpm |
| Avg. Air Consumption | 32.8 cfm (929 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 3/8" NPT (PT) |
| Hose Size | 1/2" ID |

Heavy Duty Air Angle Grinder

- Lightweight and compact design
- Self-locking lever throttle prevents accidental start-ups
- Ideally suited to the automotive aftermarket and heavy duty industrial markets


A3040
A3041
A3042

| Model | A3040 | A3041 | A3042 |
|----------------------|---------------------|---------------------|---------------------|
| Wheel Size | 4" (100mm) | 4-1/2" (113mm) | 5" (125mm) |
| Free Speed | 11,000 rpm | 11,000 rpm | 11,000 rpm |
| Avg. Air Consumption | 6.0 cfm (170 l/min) | 6.0 cfm (170 l/min) | 6.0 cfm (170 l/min) |
| Air Pressure | 90 PSI | 90 PSI | 90 PSI |
| Air Inlet | 1/4" NPT (PT) | 1/4" NPT (PT) | 1/4" NPT (PT) |
| Hose Size | 3/8" ID | 3/8" ID | 3/8" ID |

A3075 7" Heavy Duty Vertical Air Grinder

- Double idler planetary gear system
- Ball bearing balanced construction for vibration-free performance
- Dual-handle design offers maximum operator control

| | |
|----------------------|----------------------|
| Wheel Size | 7" (175mm) |
| Spindle Thread | 5/8" - 11 |
| Free Speed | 7,000 rpm |
| Avg. Air Consumption | 36 cfm (1,019 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 1/2" ID |

* Pad not included



A3090 9" Heavy Duty Vertical Air Grinder

- Double idler planetary gear system
- Ball bearing construction for vibration-free performance
- Dual-handle design offers maximum operator control

| | |
|----------------------|----------------------|
| Wheel Size | 9" (225mm) |
| Spindle Thread | 5/8" - 11 |
| Free Speed | 6,000 rpm |
| Avg. Air Consumption | 36 cfm (1,019 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/2" NPT (PT) |
| Hose Size | 1/2" ID |

* Pad not included





A4210 Delta Sander (Non-Vacuum)

- Compact design and comfortable grip
- Heavy duty construction for durable smooth operation
- Ideal for all types of surface sanding, polishing and scrubbing
- High powered, non-vacuum design

| | |
|----------------------|--------------------|
| Orbital Stroke | 1/8" (3.2mm) |
| Pad Size | 100mm |
| Free Speed | 10,000 rpm |
| Avg. Air Consumption | 1.8 cfm (51 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4211 Delta Sander (Central Vacuum)

- Compact design and comfortable grip
- Heavy duty construction for durable smooth operation
- Ideal for all types of surface sanding, polishing and scrubbing
- High powered, central vacuum design

| | |
|----------------------|--------------------|
| Orbital Stroke | 1/8" (3.2mm) |
| Pad Size | 100mm |
| Free Speed | 10,000 rpm |
| Avg. Air Consumption | 1.8 cfm (51 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4212 Delta Sander (Self-Vacuum)

- Compact design and comfortable grip
- Heavy duty construction for durable smooth operation
- Ideal for all types of surface sanding, polishing and scrubbing
- High powered, self-vacuum design

| | |
|----------------------|--------------------|
| Orbital Stroke | 1/8" (3.2mm) |
| Pad Size | 100mm |
| Free Speed | 10,000 rpm |
| Avg. Air Consumption | 1.8 cfm (51 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4244 Heavy Duty Jitterbug Sander (Central Vacuum)

- Smooth, reliable and powerful
- Long lasting durability with low maintenance
- For all types of surface preparation and rapid removal of material from large areas
- High powered, central vacuum design

| | |
|----------------------|---------------------|
| Orbital Stroke | 1/8" (3.2mm) |
| Pad Size | 100 x 180mm |
| Free Speed | 8,500 rpm |
| Avg. Air Consumption | 1.65 cfm (47 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4263 6" Palm Orbital Sander (Non-Vacuum)

- Lightweight and compact design for minimum operator fatigue
- Powerful and rapid removal of heavy materials, pre-paint preparation, feather edging and finish sanding
- Composite housing with palm grip
- High powered, non-vacuum design

| | |
|----------------------|----------------------|
| Orbital Stroke | 1/5" (5mm) |
| Pad Size | 6" (150mm) |
| Free Speed | 11,000 rpm |
| Avg. Air Consumption | 1.5 cfm (42.5 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4265 6" Palm Orbital Sander (Non-Vacuum)

- Orbital action ensures final swirl-free finish
- Lightweight, vibration-free performance
- Balanced ball bearing construction
- Contoured palm-grip handle for one-hand operation
- Variable speed throttle lever for positive speed control
- High powered, non-vacuum design

| | |
|----------------------|---------------------|
| Orbital Stroke | 1/5" (5mm) |
| Free Speed | 9,000 - 10,000 rpm |
| Avg. Air Consumption | 6.5 cfm (184 l/min) |
| Air Pressure | 90 PSI |
| Pad Size | 6" (150mm) |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4264 6" Palm Orbital Sander (Self-Vacuum)

- Removes heavy material and body filler on large, flat surfaces leaving a swirl-free finish
- Vibration-free performance
- High powered, self-vacuum design

| | |
|----------------------|--------------------|
| Orbital Stroke | 1/5" (5mm) |
| Pad Size | 6" (150mm) |
| Free Speed | 11,000 rpm |
| Avg. Air Consumption | 2.4 cfm (68 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |





A4266 6" Palm Orbital Sander (Central Vacuum)

- Removes heavy material and body filler on large, flat surfaces leaving a swirl-free finish
- Vibration-free performance
- High powered, central vacuum design

| | |
|----------------------|--------------------|
| Orbital Stroke | 1/5" (5mm) |
| Pad Size | 6" (150mm) |
| Free Speed | 11,000 rpm |
| Avg. Air Consumption | 2.4 cfm (68 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4269 6" Random Orbital Sander (Central Vacuum)

- Large orbit for removing heavy material with swirl-free finish
- Durable, lightweight, composite housing design
- High powered, central vacuum engineering

| | |
|----------------------|--------------------|
| Orbital Stroke | 3/8" (10mm) |
| Pad Size | 6" (150mm) |
| Free Speed | 9,000 rpm |
| Avg. Air Consumption | 3.1 cfm (88 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |
| Noise Level | 80 dBA |



A4261 6" Heavy Duty Orbital Sander

- Balanced ball bearing construction for vibration-free performance
- Automatic release throttle lever with positive action
- Built-in regulator for positive speed control

| | |
|----------------------|---------------------|
| Pad Size | 6" (150mm) |
| Spindle/Thread | 5/16" - 24 |
| Free Speed | 10,000 rpm |
| Avg. Air Consumption | 6.5 cfm (184 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4224 3" Micro Air Orbital Sander

- Adjustable speed regulator to match speed to job
- Silenced exhaust directs air away from workspace
- 2 Finger throttle and comfortable rubber handle

| | |
|----------------------|---------------------|
| Pad Size | 3" (75mm) |
| Spindle/Thread | M6 * P1.0mm |
| Free Speed | 15,000 rpm |
| Avg. Air Consumption | 3.6 cfm (102 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A4243 Orbital "Jitterbug" Sander

- Heavy duty balanced ball bearing construction
- Automatic release throttle lever
- Locking abrasive clamp for positive sand paper retention
- Constant 3/16" stroke for a smooth, fine finish

| | |
|----------------------|------------------------------|
| Orbital Stroke | 3/16" (5mm) |
| Pad Size | 3-2/3" x 6-3/4" (92 x 171mm) |
| Free Speed | 8,000 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4249 Heavy Duty Straight Line Air Sander

- Synchronized dual action pistons for balanced & smooth operation
- Long length pad for precise leveling
- Quick-action paper clamps
- Automatic release trigger with positive stop action

| | |
|----------------------|-------------------------------|
| Pad Size | 2-3/4" x 17-1/2" (70 x 455mm) |
| Stroke Length | 1" (25mm) |
| Stroke per Min. | 2,100 spm |
| Avg. Air Consumption | 8.0 cfm (227 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4270 7" Horizontal Air Angle Sander

- Built-in air regulator for positive speed adjustment
- Hardened and ground spiral bevelled gears for low vibration
- Side hand mounts on either side
- Lever throttle for positive speed control
- Excellent for heavy rust removal, metal sanding and shaping of contoured filler patches

| | |
|-----------------------|----------------------|
| Pad Size | 7" (175mm) |
| Spindle / Thread Size | 5/8" - 11 |
| Free Speed | 4,500 rpm |
| Avg. Air Consumption | 12.0 cfm (340 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4271 7" Air Heavy Duty Angle Sander

- Ideal for both light and heavy duty applications
- Automatic throttle release
- Ball bearing construction for long life

| | |
|----------------------|----------------------|
| Wheel Size | 7" (175mm) |
| Spindle Thread | 5/8" - 11 |
| Free Speed | 4,500 rpm |
| Avg. Air Consumption | 19.7 cfm (558 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 3/8" NPT (PT) |
| Hose Size | 3/8" ID |





A4231 Wet Air Sander (3" or 4" Pad)

- Angle of polish: 12° - 20°
- Grinder pressure: 1 - 3 kg/c
- Lever throttle for feathering control
- Sufficient water supply is required

| | |
|----------------------|---------------------|
| Spindle Thread | 5/8" - 11(M14) |
| Max. Speed | 5,000 rpm |
| Avg. Air Consumption | 8.2 cfm (232 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4252 Air High Speed Sander

- Deluxe smooth handle for comfortable operation
- Excellent for a variety of surface conditioning operations such as paint removal, light touch-up work, rust removal, etc.

| | |
|----------------------|---------------------|
| Grinding Wheel | 5" (125mm) |
| Free Speed | 16,000 rpm |
| Avg. Air Consumption | 5.0 cfm (142 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4291 Heavy Duty Air Belt Sander

- Ideal for finishing different shapes of surfaces
- Lightweight balanced tool to make fine finishing
- Lever throttle for positive speed control
- Rear exhaust directs air away from work surface

| | |
|----------------------|----------------------|
| Size of Belt | 10 * 330mm |
| Free Speed | 16,000 rpm |
| Avg. Air Consumption | 8.0 cfm (227 l/min)) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4292 Heavy Duty Air Belt Sander

- Ideal for irregular angles/shapes on car bodywork
- Rear exhaust directs air away from work surface
- Cushioned grip for added control and comfort

| | |
|----------------------|---------------------|
| Size of Belt | 20 * 520mm |
| Free Speed | 16,000 rpm |
| Avg. Air Consumption | 9.0 cfm (255 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4071 7" Heavy Duty Horizontal Air Angle Polisher

- Ideal for heavy duty buffering
- Side hand mounts on either side

| | |
|----------------------|----------------------|
| Wheel Size | 7" (175mm) |
| Spindle Thread | 5/8" - 11 |
| Free Speed | 2,500 rpm |
| Avg. Air Consumption | 19.7 cfm (558 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/2" ID |



A4065 3" Micro Air Polisher

- Adjustable speed regulator to match speed to job
- Silenced exhaust directs air away from workspace
- 2 Finger throttle and comfortable rubber handle

| | |
|----------------------|---------------------|
| Pad Size | 3" (75mm) |
| Spindle/Thread | M6 * P1.0mm |
| Free Speed | 2,500 rpm |
| Avg. Air Consumption | 3.6 cfm (102 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





Adjustable Clutch Air Screwdriver

- Straight type
- Hanger handle
- Lightweight body
- Quick change bit retainer
- Rear exhaustion & low noise design



A4401

A4400

| | A4401 | A4400 |
|----------------------|-----------------------|-----------------------|
| Bolt Size Capacity | 3 - 4mm | 4.0mm |
| 5s Torque Increase | 2.3 ft/lbs (3.0 N.m.) | 2.3 ft/lbs (3.0 N.m.) |
| Free Speed | 1,250 rpm | 1,700 rpm |
| Avg. Air Consumption | 2.0 cfm (57 l/min) | 2.0 cfm (57 l/min) |
| Air Pressure | 90 PSI | 90 PSI |
| Air Inlet | 1/4" NPT (PT) | 1/4" NPT (PT) |
| Hose Size | 1/4" ID | 1/4" ID |

Adjustable Clutch Air Screwdriver

- 90° Angle head design
- Hanger handle
- Lightweight body
- Quick change bit retainer
- Rear exhaustion & low noise design



A4410

A4411

| | A4410 | A4411 |
|----------------------|-----------------------|-----------------------|
| Bolt Size Capacity | 5 - 6mm | 3 - 4mm |
| 5s Torque Increase | 3.7 ft/lbs (5.0 N.m.) | 2.3 ft/lbs (3.0 N.m.) |
| Free Speed | 1,650 rpm | 1,250 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) | 2.0 cfm (57 l/min) |
| Air Pressure | 90 PSI | 90 PSI |
| Air Inlet | 1/4" NPT (PT) | 1/4" NPT (PT) |
| Hose Size | 1/4" ID | 1/4" ID |

A4408 Adjustable Clutch Air Screwdriver

- Straight type
- External adjustable clutch mechanism
- Lightweight body
- Quick change bit retainer
- Rear exhaustion & low noise design



| | |
|----------------------|------------------------|
| Square Drive | 1/8 - 13/64" (3 - 5mm) |
| Min. Torque | 1.8 ft/lbs (2.5 N.m.) |
| Max. Torque | 5.9 ft/lbs (8 N.m.) |
| Free Speed | 1,800 rpm |
| Avg. Air Consumption | 4.42 cfm (125 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |

A4427 Pistol Grip Adjustable Clutch Air Screwdriver

- Pistol grip design
- External adjustable clutch mechanism
- Quick change bit retainer

| | |
|----------------------|------------------------|
| Square Drive | 1/8 - 13/64" (3 - 5mm) |
| Min. Torque | 1.8 ft/lbs (2.5 N.m.) |
| Max. Torque | 6.6 ft/lbs (9 N.m.) |
| Free Speed | 1,800 rpm |
| Avg. Air Consumption | 4.42 cfm (125 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A4455 Impact Air Screwdriver (Twin Hammer)

- Twin hammer and high frequent impact mechanism for removing and replacing screws easily
- Rear exhaust & low noise engineering

| | |
|----------------------|-----------------------|
| Bolt Size Capacity | 8 - 9mm |
| 5s Increase Torque | 185 ft/lbs (250 N.m.) |
| Free Speed | 5,500 rpm |
| Avg. Air Consumption | 4.42 cfm (57 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A4456 Impact Air Screwdriver (Twin Hammer)

- Twin hammer and high frequent impact mechanism for removing and replacing screws easily
- Rear exhaust & low noise engineering

| | |
|----------------------|---------------------|
| Bolt Size Capacity | 4 - 6mm |
| 5s Torque Increase | 15 ft/lbs (20 N.m.) |
| Free Speed | 9,000 rpm |
| Avg. Air Consumption | 2.0 cfm (57 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A4476 Pistol Grip Air Screwdriver

- Non-pin design for high torque and low counteraction
- Rear exhaust directs air away from work surface
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|---------------------|
| Bolt Size Capacity | 4 - 6mm |
| 5s Torque Increase | 15 ft/lbs (20 N.m.) |
| Free Speed | 9,000 rpm |
| Avg. Air Consumption | 2.0 cfm (57 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |





A2439 3/8" Straight Drill w/ Keyless Chuck

- In-line drill designed for low speed/high torque applications, such as drilling, sanding and polishing
- Quick-lock, keyless chuck for easy replacement
- Level throttle for positive speed control
- Cushioned grip

| | |
|----------------------|--------------------|
| Drill Capacity | 3/8" (10mm) |
| Spindle/Thread Size | 3/8" - 24 |
| Free Speed | 2,600 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2425 1/4" Mini Reversible Air Drill w/ Keyless Chuck

- Ideal for heavy duty drilling, engine work and other auto body applications
- Handle exhaust directs air away from work surface
- Pistol grip design with non-slip rubber handle
- Keyless chuck construction for easy drill replacement

| | |
|----------------------|---------------------|
| Drill Capacity | 3/8" (10mm) |
| Spindle/Thread Size | 3/8" - 24 |
| Free Speed | 2,800 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2428 3/8" Reversible Air Drill w/ keyless Chuck

- Ideal for heavy duty drilling, engine work and other auto body applications
- Handle exhaust directs air away from work surface
- Positive action trigger for variable speed control
- Keyless chuck construction for easy drill replacement

| | |
|----------------------|---------------------|
| Drill Capacity | 3/8" (10mm) |
| Spindle/Thread Size | 3/8" - 24 |
| Free Speed | 2,000 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2443 1/2" Reversible Air Drill w/ keyless Chuck

- Ideal for heavy duty drilling, engine work and other auto body applications
- Handle exhaust directs air away from work surface
- Positive action trigger for variable speed control
- Side handle for extra control and comfort
- Keyless chuck construction for easy drill replacement

| | |
|----------------------|---------------------|
| Drill Capacity | 1/2" (13mm) |
| Spindle/Thread Size | 1/2" - 20 |
| Free Speed | 450 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A2432 3/8" Air Angle Head Drill

- Compact design for easy access
- Lever throttle for positive speed control
- Rear exhaust keeps air away from work area
- Forward/Reverse control locks in both positions
- Lightweight for fatigue-free handling

| | |
|----------------------|---------------------|
| Drill Capacity | 3/8" (10mm) |
| Free Speed | 1,800 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2451 Industrial Air Spot Drill

- Adjustable depth stop which allows you to drill out just the spot weld and not the panel beneath
- Drills out the entire spot weld, eliminating the need for grinding
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|---------------------|
| Drill Capacity | 5/16" (8mm) |
| Spindle/Thread Size | 3/8" - 24 |
| Free Speed | 1,800 rpm |
| Avg. Air Consumption | 5.0 cfm (142 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2452 Industrial Air Spot Drill

- Adjustable depth stop which allows you to drill out just the spot weld and not the panel beneath
- Drills out the entire spot weld, eliminating the need for grinding
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|---------------------|
| Drill Capacity | 5/16" (8mm) |
| Spindle/Thread Size | 3/8" - 24 |
| Free Speed | 1,600 rpm |
| Avg. Air Consumption | 6.0 cfm (170 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3130 Palm Grip Air Hammer w/ 6 Tips

- Ideal for small engine work in tight places
- Ergonomic arc design
- Rubber head reduces friction on surface for smooth operation

| | |
|----------------------|---------------------|
| Bore Size | 1-7/16" (37mm) |
| Blow per Min. | 1,000 bpm |
| Stroke Length | 1/5" (5mm) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 30 - 125 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A3101 Professional Air Hammer w/ 5 Chisels

- Includes five industrial grade chisels
- Ideal for cutting applications, exhaust systems and general repair work
- Quick change spring retainer for added safety

| | |
|----------------------|---------------------|
| Bore Size | 3/4" (19mm) |
| Chisel Shank | 3/8" (10mm) |
| Blow per Min. | 3,200 bpm |
| Stroke Length | 2-5/8" (66mm) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3112 190mm Heavy Duty Air Hammer

- Ideal for cutting applications, exhaust systems and general repair work
- Heat-treated piston and cylinder for durability
- Trigger control for speed and power
- Quick change spring retainer for added safety
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|---------------------|
| Bore Size | 3/4" (19mm) |
| Chisel Shank | 10.3mm |
| Blow per Min. | 3,200 bpm |
| Stroke Length | 2-5/8" (66mm) |
| Avg. Air Consumption | 3.7 cfm (105 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3104 250mm Heavy Duty Air Hammer

- Ideal for cutting applications, exhaust systems and general repair work
- Heat-treated piston and cylinder for durability
- Trigger control for speed and power
- Quick change spring retainer for added safety
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|--------------------|
| Bore Size | 3/4" (19mm) |
| Chisel Shank | 10.3mm |
| Blow Per Min. | 2,100 bpm |
| Stroke Length | 3-5/8" (89mm) |
| Avg. Air Consumption | 3.3 cfm (93 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3121 Industrial Air Riveting Hammer

- Powerful air hammer provides hard hitting blows required to drive 1/8" to 1/4" steel rivets used in industrial assembly applications
- Ideal for a wide variety of heavier hammering, chipping, cutting and scraping applications
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|---------------------|
| Bore Size | 3/4" (19mm) |
| Chisel Shank | 12.7mm |
| Blow per Min. | 2,200 bpm |
| Stroke Length | 2-11/16" (68mm) |
| Avg. Air Consumption | 7.0 cfm (198 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3155 Mini Air Chipping Hammer (Hex Type)

- Powerful hard hitting industrial chipping hammers
- Offers the perfect balance of service life and performance
- Outside teasing throttle
- Drop forged, open handle design
- Heat treated, hardened steel piston and cylinder for long life

| | |
|----------------------|---------------------|
| Bore Size | 11.8mm |
| Chisel Length | 220mm |
| Blow per Min. | 3,600 bpm |
| Stroke Length | 2-5/8" (66mm) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



Industrial Air Chipping Hammers (Hex Type)

- Powerful hard hitting industrial chipping hammers
- Offers the perfect balance of service life and performance
- Outside teasing throttle
- Drop forged, open handle design
- Heat treated, hardened steel piston and cylinder for long life



| | A3156 | A3157 | A3158 | A3159 |
|----------------------|--------------------|--------------------|--------------------|--------------------|
| Bore Size | 14.5mm | 14.5mm | 14.5mm | 14.5mm |
| Chisel Length | 250mm | 250mm | 250mm | 250mm |
| Blow per Min. | 2,300 bpm | 2,000 bpm | 1,800 bpm | 1,600 bpm |
| Stroke Length | 1" (25mm) | 2" (50mm) | 2" (50mm) | 4" (100mm) |
| Avg. Air Consumption | 20 cfm (566 l/min) | 22 cfm (623 l/min) | 24 cfm (680 l/min) | 26 cfm (736 l/min) |
| Air Pressure | 90 PSI | 90 PSI | 90 PSI | 90 PSI |
| Air Inlet | 3/8" NPT (PT) | 3/8" NPT (PT) | 3/8" NPT (PT) | 3/8" NPT (PT) |
| Hose Size | 1/2" ID | 1/2" ID | 1/2" ID | 1/2" ID |



A4302 Single Piston Air Scaler w/ Handle

- Removes rust, paint and cement from steel
- Piston scalers can be used in confined areas

| | |
|----------------------|---------------------|
| Piston Dia. | 30 x 24 x 75mm |
| Blow per Min. | 8,000 bpm |
| Stroke Length | 15/16" (24mm) |
| Avg. Air Consumption | 8.5 cfm (241 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4301 Triple Piston Air Scaler

- Removes rust, paint and cement from steel
- Piston scalers can be used in areas that A4302 scalers can't fit

| | |
|----------------------|----------------------|
| Piston Dia. | 27 x 21 x 69mm |
| Blow per Min. | 3,000 bpm |
| Stroke Length | 7/8" (22.5mm) |
| Avg. Air Consumption | 11.5 cfm (326 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4312 Industrial Air Flux Chisel

- Ideal for scaling rust removal
- Comes complete with flux chisel

| | |
|----------------------|----------------------|
| Piston Dia. | 11 x 25 x 50mm |
| Blow per Min. | 4,000 bpm |
| Stroke Length | 7/8" (22.5mm) |
| Avg. Air Consumption | 11.4 cfm (323 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4314 Industrial Air Flux Scaler w/ Chisel & Needle

- Ideal for scaling rust removal
- Includes needle scaler attachment with high tension steel needles
- Comes complete with flux chisel

| | |
|----------------------|----------------------|
| Piston Dia. | 11 x 25 x 50mm |
| Blow per Min. | 4,000 bpm |
| Stroke Length | 7/8" (22.5mm) |
| Avg. Air Consumption | 11.4 cfm (323 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4316 Industrial Air Flux Chisel

- Powerful, heavy duty industrial flux chipper
- Lightweight, compact design allows maximum operator control and access to jobs in hard-to-reach areas
- Lever throttle control
- Easy to use ball type chisel retainer allows for quick, easy bit changes
- Converts into needle scaler
- Ideal for chipping operations including removal of slag, scale, welds and masonry

| | |
|----------------------|---------------------|
| Piston Dia. | 22 x 19 x 59mm |
| Blow per Min. | 4,000 bpm |
| Stroke Length | 1-5/16" (33mm) |
| Avg. Air Consumption | 8.8 cfm (249 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A4313 Industrial Air Flux Scaler

- Powerful hammer suitable for a wide variety of applications
- Powerful motor and easy to control throttle

| | |
|----------------------|----------------------|
| Piston Dia. | 11 x 25 x 50mm |
| Blow per Min. | 4,000 bpm |
| Stroke Length | 7/8" (22.5mm) |
| Avg. Air Consumption | 11.4 cfm (323 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Number of Needles | Ø3 x 12pc |
| Hose Size | 3/8" ID |



A4315 Heavy Duty Straight Air Needle Scaler

- Powerful, heavy duty industrial needle scaler
- Lightweight design
- Lever throttle control
- Excellent for paint, rust, dirt or weld scale removal from irregular and curved surfaces or hard-to-access areas

| | |
|----------------------|---------------------|
| Piston Dia. | 20 x 17 x 47mm |
| Blow per Min. | 4,000 bpm |
| Stroke Length | 1-1/16" (27mm) |
| Avg. Air Consumption | 8.8 cfm (249 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Number of Needles | Ø3 x 12pc |
| Hose Size | 3/8" ID |



A4321 Pistol Grip Air Needle Scaler

- Powerful hammer suitable for a wide variety of applications
- Powerful motor and easy to control throttle
- Pistol grip design with non-slip rubber covered handle

| | |
|--------------------|----------------------|
| Piston Dia. | 23.5 x 20 x 73 (mm) |
| Blow per Min. | 3,700 bpm |
| Air Consumption | 10 cfm (283 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Numbers of Needles | Ø2 x 29pc, Ø3 x 19pc |
| Hose Size | 3/8" ID |





A2308 Air Nibbler

- Lever throttle for positive speed control
- Cuts metal and plastic sheets
- Cuts up to 16 gauge mild steel
- Adjustable die guide for forward, backward, right or left cutting
- Ergonomic cushioned grip

| | |
|----------------------|--------------------|
| Max. Cutting | 16 gauge (1.2mm) |
| Stroke per Min. | 2,600 spm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2307 Heavy Duty Air Nibbler

- Lever throttle for positive speed control
- Cuts metal and plastic sheets
- Cutting capacity up to 18 gauge mild steel
- Adjustable die guide for forward, backward, right or left cutting

| | |
|-----------------------|---------------------|
| Max. Cutting Capacity | 16 gauge (1.2mm) |
| Stroke per Min. | 2,100 rpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2303 Utility Air Cut-Off Tool

- 3" Cutter is ideal for a wide range of cutting applications
- Ergonomic cushioned grip
- Lever throttle for feathering control

| | |
|-----------------------|--------------------|
| Max. Cutting Capacity | 3/4" (19mm) |
| Wheel Dia. | 3" (75mm) |
| Free Speed | 21,000 rpm |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2311 Professional Air Body Saw

- Ideal for body shop repair, muffler and exhaust work
- Cuts all types of aluminum, plastic, fiberglass and sheet metal
- Cuts intricate shapes and tight radial curves

| | |
|----------------------|---------------------|
| Max. Cutting Size | 16 gauge (1.2mm) |
| Stroke Length | 10mm |
| Stroke per Min. | 5,000 bpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A2319 2-in-1 Air Saw & File w/ Hose

- 2-in-1 Function designed
- Cuts all types of aluminum, plastic, fiberglass, and sheet metal
- Cuts intricate shapes and tight radial curves
- Cushioned grip for added control and comfort

| | |
|----------------------|---------------------|
| Max. Cutting Size | 14 gauge (1.6mm) |
| Stroke Length | 10mm |
| Stroke per Min. | 5,000 bpm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2305 Air Knife w/ Blade

- As a sealant cutter, cuts around bonded and encapsulated glass
- Cleans and smooths moldings after glass removal
- Teasing throttle and regulator provide easy speed control
- Flexible blade mount can be positioned in 12 different ways (at 30° increments)
- Rear exhaust directs air away from work surface

| | |
|----------------------|---------------------|
| Blow per Min. | 20,000 rpm |
| Avg. Air Consumption | 7.0 cfm (198 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2321 Pistol Grip Air Metal Shear

- Ideal for cutting, trimming and shearing tin, plastic, aluminum and other metals up to 18 gauge
- Universal cutter for all applications such as various sheet metal fabricating, cutting vehicle body panels and other cutting needs
- Variable cutting speed control for precision work and use in close quarters

| | |
|----------------------|---------------------|
| Max. Capacity Size | 16 gauge (1.2mm) |
| Free Speed | 2,200 rpm |
| Avg. Air Consumption | 6.5 cfm (184 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3750 Air Shear

- Durable construction delivers long hours of cutting power
- Lightweight and easy to operate
- Unique safety lock accidental start-up
- Forged blades for easy cuts

| | |
|------------------|--------------------|
| Air Consumption | 8 - 10 bar |
| Cutting Power | 0 - 25 m/m |
| Working Pressure | 2.8 cfm (80 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A2304 Heavy Duty Air File

- Heavy duty construction for strength and durability
- Excellent for light deburring and finishing work

| | |
|----------------------|---------------------|
| Stroke Length | 5/16" (8mm) |
| Free Speed | 3,700 rpm |
| Avg. Air Consumption | 6.0 cfm (170 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2325 Heavy Duty Air File

- Heavy duty construction for strength and durability
- Excellent for light deburring and finishing work

| | |
|----------------------|---------------------|
| Blows per Min. | 2,500 bpm |
| Stroke Length | 1.2mm |
| Avg. Air Consumption | 3.5 cfm (100 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2302 Air Punch & Flange Tool

- Performs hole punching and panel crimping
- Rotating head for convenient use
- Every pull of the lever delivers a single punch or a single flange crimp with precision control
- Forms an offset crimped edge on sheet metals for no-bump lap welds
- Cuts metal fabrication time in half

| | |
|----------------------|---------------------|
| Capacity | 14 gauge (1.6mm) |
| Punch | 5mm |
| Flange Width | 12mm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2309 Pistol Grip Air Punch & Flange Tool

- Performs hole punching and panel crimping
- Rotating head for convenient use
- Every pull of the lever delivers a single punch or a single flange crimp with precision control
- Forms an offset crimped edge on sheet metals for no-bump lap welds
- Pistol grip design with non-slip rubber handle

| | |
|----------------------|---------------------|
| Capacity | 14 gauge (1.6mm) |
| Punch | 5.5mm |
| Flange Width | 12mm |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |

A3706 3/16" Hydraulic Air Riveter

- Ideal for aluminium and steel rivets up to 3/16"
- Supplied with four riveting nozzles and two spanners
- Trigger operated rivet with hardened steel jaw assembly and rivet shaft safety cap

| | |
|----------------------|---|
| Nose Pieces | 3/32", 1/8", 5/32", 3/16" (2.4, 3.2, 4.0, 4.8mm) |
| Avg. Air Consumption | 4.0 cfm (113 l/min) |
| Air Pressure | 90 PSI |
| Traction Power | 1,940 lbs (8,629n) |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3708 3/16" Hydraulic Air Riveter w/ Handle

- Lightweight and ergonomically designed
- Can be suspended or hand-held
- Heavy duty fiber composite body for performance and long life
- Bi-directional 360° rotation air hose universal joint
- Safety valve automatically releases pressure when pressure exceeds 110 PSI to protect operator and tool

| | |
|----------------------|--|
| Work Capacity | For Setting Standard Blind Rivets 2.4 - 4.8mm (3/32" - 3/16") in All Materials |
| Stroke | 3/4" (19mm) |
| Working Air Pressure | 85 - 90 PSI |
| Traction Power | 2,400 lbs (10,675n) |
| Nose Pieces | 3/32", 1/8", 5/32", 3/16" (2.4, 3.2, 4.0, 4.8mm) |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3709 1/4" Heavy Duty Hydraulic Air Riveter w/ Handle

- Lightweight and ergonomically designed
- Can be suspended or hand-held
- Heavy duty fiber composite body for durability and long life
- Bi-directional 360° rotation air hose universal joint
- Safety valve, automatically releases pressure when the pressure is over the set 110 PSI to protect from the operator and tool

| | |
|----------------------|---|
| Work Capacity | For Setting Standard Blind Rivets 4.8 - 6.4mm (3/16" - 1/4") in All Materials |
| Stroke | 19/32" (15mm) |
| Working Air Pressure | 85 - 95 PSI |
| Traction Power | 2,400 lbs (10,675n) |
| Nose Pieces | 3/16", 7/32", 1/4" (4.8, 5.6, 6.4mm) |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A6033 HVLP Air Spray Gun

- High volume, low pressure for increased efficiency
- Environmental regulations compliant

| | |
|----------------------|-----------------------|
| Spray Pattern | 5" - 6" (125 - 150mm) |
| Air Pressure | 29 PSI |
| Needle Nozzle | 0.8mm, 1.0mm, 1.2mm |
| Cup Capacity | 125cc |
| Avg. Air Consumption | 4.3 cfm (122 l/min) |
| Fluid Inlet | 1/4" NPS |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |

- Optional needle / nozzle assemblies
A6033-A (0.8mm), A6033-B (1.0mm), A6033-C (1.2mm)



A6035 HVLP Touch Up Air Spray Gun

- Ideal for shading and spotting
- High volume, low pressure for efficiency
- Very low over spray and fine atomization
- Chrome with anodized air cap
- Stainless steel needle and fluid tip

| | |
|----------------------|-----------------------|
| Spray Pattern | 5" - 6" (125 - 150mm) |
| Air Pressure | 29 PSI |
| Needle Nozzle | 1.0mm |
| Cup Capacity | 250cc |
| Avg. Air Consumption | 4.3 cfm (122 l/min) |
| Fluid Inlet | 1/4" NPS |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |

- Optional needle / nozzle assemblies
A6035-A (0.8mm), A6035-B (1.0mm), A6035-C (1.2mm)



A6022 Mini HVLP Air Spray Gun

- High volume, low pressure for increased efficiency
- Stainless steel needle and fluid tip
- Very low over spray and fine atomization
- Manufactured with high tolerance CNC machined parts

| | |
|----------------------|-----------------------|
| Spray Pattern | 4" - 5" (100 - 125mm) |
| Air Pressure | 29 PSI |
| Needle Nozzle | 1.0mm |
| Cup Capacity | 125cc |
| Avg. Air Consumption | 3.0 cfm (85 l/min) |
| Fluid Inlet | M14 * 1.0 |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |

- Optional needle / nozzle assemblies
A6022-A (0.8mm), A6022-B (1.0mm), A6022-C (1.2mm)

A6023 HVLP Air Spray Gun

- High volume, low pressure for greater efficiency
- Very low over spray and fine atomization
- Chrome with anodized air cap
- Gravity feed action for less air and better control over atomization and fluid output

| | |
|----------------------|-----------------------|
| Spray Pattern | 6" - 8" (150 - 200mm) |
| Air Pressure | 29 PSI |
| Needle Nozzle | 1.4mm |
| Cup Capacity | 600cc |
| Avg. Air Consumption | 8.0 cfm (227 l/min) |
| Fluid Inlet | M16 * 1.5 |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |

- Optional needle / nozzle assemblies
A6023-A (1.4mm), **A6023-B** (1.7mm), **A6023-C** (2.0mm)



A6058 HVLP Air Spray Gun

- Designed for automotive and production applications
- Use with acrylics, enamels, lacquers, primers, rimers, shellacs, stains and varnishes
- Stainless steel needle and fluid nozzle
- 1 qt. heavy duty aluminum siphon feed cup

| | |
|----------------------|--|
| Spray Pattern | 6" - 8" (150 - 200mm) |
| Air Pressure | 29 PSI |
| Needle Nozzle | 1.3mm, 1.4mm, 1.5mm, 1.8mm, 2.0mm, 2.5mm |
| Cup Capacity | 1000cc |
| Avg. Air Consumption | 6.2 cfm (176 l/min) |
| Fluid Inlet | 3/8" NPS |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |

- Optional needle / nozzle assemblies
A6058-A (1.3mm), **A6058-B** (1.4mm), **A6058-C** (1.5mm)
A6058-D (1.8mm), **A6058-E** (2.0mm), **A6058-F** (2.5mm)



A6025 HVLP Gravity Feed Air Spray Gun w/ Regulator

- High volume, low pressure for increased efficiency
- Regulator with pressure gauge
- Environmental regulations compliant

| | |
|----------------------|---------------------------|
| Spray Pattern | 8" - 10" (200 - 250mm) |
| Air Pressure | 29 - 50 PSI |
| Needle Nozzle | 1.3, 1.5, 1.7, 1.9, 2.2mm |
| Cup Capacity | 20 oz. (600cc) |
| Avg. Air Consumption | 6 - 8 cfm (227 l/min) |
| Fluid Inlet | M16 x 1.5P |
| Air Inlet | 1/4" NPS |
| Hose Size | 1/4" ID |

- Optional needle / nozzle assemblies:
A6025-A (1.3mm), **A6025-B** (1.5mm),
A6025-C (1.7mm), **A6025-D** (1.9mm),
A6025-E (2.2mm), and also **A6025-G** (20oz. cup)





A6029 Mini Touch-Up HVLP Spray Gun w/ Regulator

- High volume, low pressure for increased efficiency
- Regulator with pressure gauge
- Environmental regulations compliant

| | |
|----------------------|--------------------------|
| Spray Pattern | 3" - 4" (75 - 100mm) |
| Air Pressure | 29 - 43 PSI |
| Needle Nozzle | 0.8, 1.0, 1.2mm |
| Cup Capacity | 7 oz. (200cc) |
| Avg. Air Consumption | 2.5 - 2.7 cfm (77 l/min) |
| Fluid Inlet | M14 x 1.0 |
| Air Inlet | 1/4" NPS |
| Hose Size | 1/4" ID |

Optional needle / nozzle assemblies:

A6029-A (0.8mm), A6029-B (1.0mm), A6029-C (1.2mm)



A6050 Production Air Spray Gun

- Designed for automotive and production applications
- Use with acrylics, enamels, lacquers, primers, rimers, shellacs, stains and varnishes
- Stainless steel needle and fluid nozzle
- 1 qt. heavy duty aluminum siphon feed cup

| | |
|----------------------|--------------------------|
| Spray Pattern | 8" - 10" (200 - 250mm) |
| Air Pressure | 50 - 70 PSI |
| Tip Nozzle | 1.8mm |
| Cup Capacity | 1000cc |
| Avg. Air Consumption | 8.5 - 12 cfm (340 l/min) |
| Fluid Inlet | 3/8" NPS |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |



A6059 Production Spray Gun

- Designed for automotive and production applications
- Use with acrylics, enamels, lacquers, primers, rimers, shellacs, stains and varnishes
- Stainless steel needle and fluid nozzle
- 1 qt. heavy duty aluminum siphon feed cup


| | |
|----------------------|-----------------------|
| Spray Pattern | 4" - 5" (100 - 125mm) |
| Air Pressure | 60 PSI |
| Needle Nozzle | 1.5mm, 1.8mm, 2.2mm |
| Cup Capacity | 1000cc |
| Avg. Air Consumption | 12.3 cfm (348 l/min) |
| Fluid Inlet | 3/8" NPS |
| Air Inlet | 1/4" NPS |
| Hose Size | 3/8" ID |

Optional needle / nozzle assemblies

A6059-A (1.5mm), A6059-B (1.8mm), A6059-C (2.2mm)

A6034 3pc LVLP Spray Gun Set

- Low volume, low pressure
- Operating Pressure: 15 - 45 PSI
- Spray Pattern: 7" - 11"
- Precision machined air cap set
- Both guns feature a 1 Liter aluminum paint cup
- Contents: (Color Coded)
 - 1 - Paint Gun with 1.3mm Needle & Nozzle Set (Red)
 - 1 - Paint Gun with 1.7mm Needle & Nozzle Set (Blue)
 - 1 - Locking Pressure Regulator

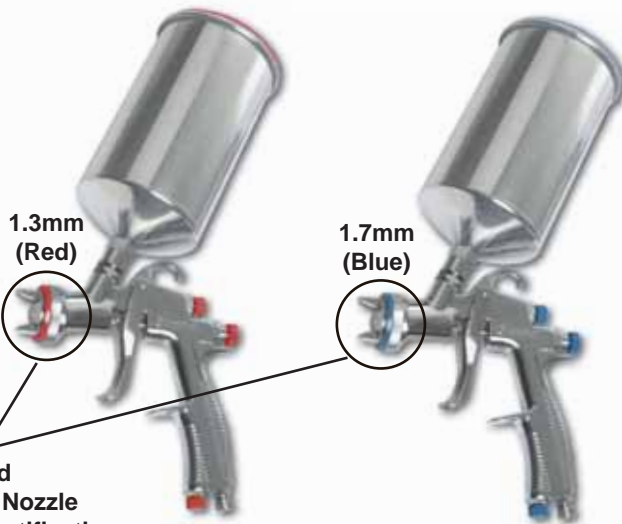

**Color Coded
Needle and Nozzle
for Easy Identification**



A6072 2 Quart Pressure Pot w/ HVLP Spray Gun

- Designed for automotive and production applications
- Use with acrylics, enamels, lacquers, primers, rimers, shellacs, stains and varnishes
- Stainless steel needle and fluid nozzle
- 2 qt. heavy duty aluminum siphon feed cup
- Air cap is made of brass for long life
- Regulator with pressure gauge

| | |
|----------------------|---------------------|
| Spray Pattern | 6" - 8" |
| Spray Length | 29 PSI |
| Air Pressure | 1.0mm |
| Needle Nozzle | 2000cc |
| Cup Capacity | 6.2 cfm (176 l/min) |
| Avg. Air Consumption | 1/4" NPS |
| Fluid Inlet | 1/4" NPS |
| Air Inlet | 3/8" ID |
| Hose Size | |



A1604 Air Brush Kit

- Double-action trigger air-paint control
- Precisely machined fine nozzle
- Great for artwork design painting

| | |
|------------------|-------------|
| Fluid Nozzle | 0.3mm |
| Working Pressure | 15 - 30 PSI |
| Cup Capacity | 22cc & 50cc |
| Cup Fix | Detachable |



A1605 Air Brush Kit

- Double-action trigger air-paint control
- Precisely machined fine nozzle
- Great for artwork design painting

| | |
|------------------|-----------------|
| Fluid Nozzle | 0.3mm |
| Working Pressure | 15 - 30 PSI |
| Cup Capacity | 5cc |
| Cup Fix | Back Stop Screw |



A1606 Air Brush Kit

- Double-action trigger air-paint control
- Precisely machined fine nozzle
- Great for artwork design painting

| | |
|------------------|------------|
| Fluid Nozzle | 0.3mm |
| Working Pressure | 5 - 30 PSI |
| Cup Capacity | 90cc |



A1607 Air Brush Kit

- Double-action trigger air-paint control
- Precisely machined fine nozzle
- Great for artwork design painting

| | |
|---------------------|----------------|
| Fluid Nozzle | 0.3mm |
| Working Pressure | 15 - 30 PSI |
| Cup Capacity of Cup | 2cc, 5cc, 13cc |



A1643 Oilless Diaphragm Air Compressor

- Ideal for artwork design painting
- Powerful, heavy duty construction
- Capacity: 1/6 HP

| | |
|------------------|----------------------------------|
| Air Displacement | 240V / 50Hz, 0.75 cfm (21 l/min) |
| Connection | 1/8" ID |
| Max. Pressure | 50 PSI (3.5 kgs) |

A6225 Air Stapler

- Lightweight design for fatigue-free operation
- Rear exhaust directs air away from work surface
- Steel top cap can be used as a hammer
- Hardened one piece piston

| | |
|-------------------|--------------------------|
| Dimension | 48 x 163 x 242mm |
| Required Pressure | 60 - 100 PSI (4 - 7 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 200pcs |



A3910 1-1/4" (32mm) Brad Nailer

- One piece drive blade for extended life
- Tool-free quick release
- Tool-free depth control to freely set nail depth
- Tool-free adjustable exhaust

| | |
|-------------------|--------------------------|
| Dimension | 272 x 248 x 60mm |
| Required Pressure | 60 - 100 PSI (4 - 7 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 100pcs |



A3911 2" (51mm) Brad Nailer

- One piece drive blade for extended life
- Tool-free quick release
- Tool-free depth control to freely set nail depth
- Tool-free adjustable exhaust

| | |
|-------------------|--------------------------|
| Dimension | 272 x 256 x 60mm |
| Required Pressure | 60 - 100 PSI (4 - 7 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 100pcs |





A3915 2-1/2" (63mm) Finish Nailer

- Lightweight & well balanced for easy operating
- Superior power with hardened one piece piston for professional application
- Adjustable knob for either sequential or contact firing
- Tool-free depth of drive adjustment for exact setting of nail head
- Tool-free jam release mechanism designed not to lock line on sight
- Teflon o-ring protects the piston from wear
- Multi-directional exhaust port directs air away from operator and work surface

| | |
|-------------------|--------------------------|
| Dimension | 316 x 76 x 292mm |
| Required Pressure | 60 - 100 PSI (4 - 7 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 100pcs |



A3916 2-1/2" (63mm) Angle Finish Nailer

- One piece drive blade for extended life
- Tool-free quick release
- Tool-free depth control to freely set nail depth
- Tool-free adjustable exhaust
- Strong, lightweight plastic magazine

| | |
|-------------------|--------------------------|
| Dimension | 272 x 256 x 60mm |
| Required Pressure | 60 - 100 PSI (4 - 7 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 100pcs |



A3922 3-1/2" (89mm) Magnesium Framing Nailer

- Lightweight & well balanced for easy operating
- Superior power with hardened one piece piston for professional application
- Open nose design for easy jammed nail extraction
- Tool free depth of drive adjustment for flush or countersunk drives into varying material
- Hardened claw tip reduces wear and limits slippage when driving at a slanted angle
- Rubber padding at the end of the magazine and both sides of the main body protect from personal injury

| | |
|-------------------|----------------------------|
| Dimension | 156 x 356 x 486mm |
| Required Pressure | 70 - 110 PSI (5 - 7.5 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 2 x 40pcs |

A3923 1-3/4" (44mm) Magnesium Roofing Nailer

- Ideal for roofing, underlating, wall sheathing, framing and recreational decks
- Strong, lightweight magnesium frame
- Use with standard 15° wire-collated roofing nails
- Steel contact safety with dual carbide inserts for less wear
- Soft grip for comfort and control
- Adjustable knob for sequential or contact firing
- Adjustable tool-free exhaust diffuser

| | |
|-------------------|----------------------------|
| Dimension | 120 x 286 x 306mm |
| Required Pressure | 70 - 110 PSI (5 - 7.5 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 120pcs |



A3930 Flooring Cleat

- Shoots both L & T type flooring nails
- Lightweight die cast aluminum body for less fatigue
- Non-marring base allows driving of fasteners close to wall
- Shoot gauge 16 cleats, 1-1/2" - 2"

| | |
|-------------------|----------------------------|
| Dimension | 80 x 432 x 540mm |
| Required Pressure | 80 - 100 PSI (5.5 - 7 bar) |
| Max. Pressure | 120 PSI (8.3 bar) |
| Nail Capacity | 120pcs |



A3738 Air Dent Puller

- Ideal for home, auto, boat or workshop applications
- Air blower for workbenches, tools and more

| | |
|---------------------|-------------------|
| Slide Hammer Weighr | 3-1/2" lb (7.7kg) |
| Pad Size | 115mm & 155mm |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





Air Grease Gun

- Heavy duty cast aluminum body for maximum performance and longer service life
- 3-Way grease loading cartridge, suction filling and bulk
- Bleeder valve purges unwanted air
- Pistol grip design with non-slip rubber covered handle
- Designed to penetrate the most stubborn grease fittings
- Single shot design (Only for A3722, A3723)

| Model | A3721 | A3722 | A3723 |
|--------------------|----------------|----------------|----------------|
| Standard Cartridge | 14 oz. (400cc) | 14 oz. (400cc) | 16 oz. (500cc) |
| Air Pressure | 3,600 PSI | 3,600 PSI | 3,600 PSI |
| Pour | 288cc/min | 2cc | 2cc |
| Air Inlet | 1/4" NPT (PT) | 1/4" NPT (PT) | 1/4" NPT (PT) |
| Hose Size | 3/8" ID | 3/8" ID | 3/8" ID |



Continuous Air Grease Gun

- Heavy duty fiber composite body for performance and long life
- Bleeder valve purges unwanted air
- 4-Jaw super grip coupler
- Non-slip knurled handle for secure grip
- Single shot design

| Model | A3724 | A3725 |
|--------------------|----------------|----------------|
| Standard Cartridge | 14 oz. (400cc) | 16 oz. (500cc) |
| Pour | 2cc | 2cc |
| Air Pressure | 3600 PSI | 3800 PSI |
| Air Inlet | 1/4" NPT (PT) | 1/4" NPT (PT) |
| Hose Size | 3/8" ID | 3/8" ID |



A3715 Air Caulking Gun

- Great for the automotive workshop
- Accepts standard size 50.8 x 210mm cartridges

| | |
|-----------------------|---------------|
| Operating Pressure. | 2.5 - 5.1 bar |
| Size of tube | Ø50.8 x 210mm |
| Capacity of Cartridge | 310 ml |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3716 Air Undercoating Gun

- Easy to use
- Fits 1 liter canister

| | |
|-------------------|---------------|
| Air Consumption | 4.0 cfm |
| Working Pressure | 70 - 90 PSI |
| Air Inlet Size | 1/4" NPT (PT) |
| Hose Size Minimum | 3/8" ID |

A3735 Air Engraving Pen

- Great for nonferrous metals, glass, ceramic, plastic, etc.
- Long lasting carbide tip
- Variable speed regulator for precise control

| | |
|----------------------|----------------------|
| Vibration | 2.5 m/s ² |
| Avg. Air Consumption | 1.0 cfm (28 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A2322 Air Stripping Tool

- Easily removes marks from plastic plates or painted surface
- Removes quickly without damaging the surface
- Special 90mm x 15mm rubber is included

| | |
|----------------------|--------------------|
| Chuck Size | 3/8" (10mm) |
| Spindle Tread | 5/16" - 24 |
| Free Speed | 2,600 rpm |
| Avg. Air Consumption | 3.1 cfm (88 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3700 Air Tire Buffer

- High power, heavy duty construction for easy and effective tire buffering

| | |
|----------------------|--------------------|
| Drill Capacity | 7/16" (11mm) |
| Spindle/Thread Size | 3/8" - 24 |
| Free Speed | 2,600 rpm |
| Avg. Air Consumption | 3.1 cfm (88 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |



A3714 Gravity Feed Air Sand Blaster

- Compact, portable design with large capacity
- Gravity feed offers uninterrupted and consistent material flow for high operating efficiency
- Pistol grip for easy and comfortable control

| | |
|----------------------|-------------------------|
| Nozzle Size | 2-15/16" L x 7/32" Dia. |
| Case Capacity | 18 oz. (514cc) |
| Avg. Air Consumption | 7 cfm (198 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 3/8" ID |





A2650 1/4" Air Filter-Regulator

- Filter keeps water, dirt and other particles from entering air line
- Regulator for precise air pressure control
- Improves spray painting performance

| | |
|----------------------|---------------|
| Max. Input Pressure | 215 PSI |
| Max. Output Pressure | 7 - 142 PSI |
| Operating Temp Range | 5 - 60°C |
| Filter Element | 5 u |
| Max. Flow | 1,750 l/min |
| Drain Capacity | 80 ml |
| Air Inlet | 1/4" NPT (PT) |



A2654 3/8" Air Filter-Regulator

- Filter keeps water, dirt and other particles from entering air line
- Regulator for precise air pressure control
- Improves spray painting performance

| | |
|----------------------|---------------|
| Max. Input Pressure | 215 PSI |
| Max. Output Pressure | 7 - 150 PSI |
| Operating Temp Range | 5 - 60°C |
| Filter Element | 5 u |
| Max. Flow | 2,500 l/min |
| Drain Capacity | 80 ml |
| Air Inlet | 3/8" NPT (PT) |



A2664 3/8" Air Filter-Regulator & Lubricator

- Features filter, regulator and lubricator to ensure protection from moisture, rust and friction
- Filter for corrosion prevention and removal of abrasive particles for longer service life
- Regulator for accurate airflow control
- Adjustable lubricator for increased durability

| | |
|----------------------|---------------|
| Max. Input Pressure | 215 PSI |
| Max. Output Pressure | 7 - 150PSI |
| Operating Temp Range | 5 - 60°C |
| Filter Element | 5 u |
| Max. Flow | 2,500 l/min |
| Drain Capacity | 80 ml |
| Air Inlet | 3/8" NPT (PT) |
| Oil Capacity | 125ml |



A1438 Air Regulator w/ Gauge (0-60 PSI)

- Includes a 0-60 PSI pressure gauge
- Provides fine air control for spray gun and air tools
- Regulate constant level of air pressure

A1440 Air Regulator w/ Gauge (0-160 PSI)

- Includes a 0-160 PSI pressure gauge

Pocket Air Blow Gun

- Pen size fits easily in pocket
- Highly adjustable air flow at the turn of the nozzle
- Plug end is designed for use with quick couplers

A1461 Pocket Air Blow Gun (Milton-Type Plug End)

A1462 Pocket Air Blow Gun (Aro-Type Plug End)

A1463 Pocket Air Blow Gun (German-Type Plug End)

| | |
|----------------------|---------------------|
| Operating Pressure | 60 - 90 PSI |
| Avg. Air Consumption | 5.0 cfm (142 l/min) |
| Air Pressure | 90 PSI |
| Hose Size | 1/4" ID |



A1432 Lever Type Blow Gun w / Tip

- Suitable for cleaning liquid, swarf or dust during manufacture or assembly
- Compact and versatile blow gun with both safety nozzle and rubber tip nozzle

| | |
|----------------------|---------------------|
| Working Pressure | 60 - 120 PSI |
| Avg. Air Consumption | 4.3 cfm (122 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT(PT) |
| Hose Size | 1/4" ID |



A1480 4" Air Blow Gun

- Easily cleans and removes dust from equipment
- Nylon body with trigger
- Comfortable lever control and insulated handle
- Angled nozzle easily gets into tight places

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 6.9 cfm (195 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A1458 4" Adjustable Air Blow Gun

- Easily cleans and removes dust from equipment
- Nylon body with trigger
- Comfortable lever control and insulated handle
- Adjustable air flow control

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 6.9 cfm (195 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |





A1485 Safety Tip Air Blow Gun

- Easily cleans and removes dust from equipment
- Nylon body with trigger
- Comfortable lever control and insulated handle
- Meets O.S.H.A. requirements

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 4.8 cfm (136 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A1484 3-in-1 Air Blow Gun

- Ideal for air blow gun, air tip, and tire inflator chuck
- Comfortable lever control and insulated handle

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 6.9 cfm (195 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A1481 13" Air Blow Gun

- Easily cleans and removes dust from equipment
- Nylon body with trigger
- Comfortable lever control and insulated handle
- Angled nozzle easily gets into tight places

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 6.9 cfm (195 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A1495 Adjustable Tip Air Blow Gun

- Removes waste, cut powder, cut trash, and water drop
- Good for cleaning, cooling, and drying air
- Aluminum die-casting body
- 2-Way duster

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 5.8 cfm (164 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |

A1465 Air Blow Gun Kit

- Includes most popular air blow gun tips for use in every place
- Includes:

| | |
|------------------------|--------------------|
| 1 - Blow gun | 1 - Brass tip |
| 1 - Safty tip | 1 - Adj. tip |
| 1 - Rubber tip | 1 - Air screen tip |
| 1 - Safety booster tip | 1 - 3" Nylon tip |

| | |
|----------------------|---------------------|
| Working Pressure | 60 - 120 PSI |
| Avg. Air Consumption | 4.3 cfm (122 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A1486 Short Nozzle Siphone Spray Set

- 4" short nozzle tube for general cleaning operation
- Siphone nozzle sprays solvents, soap solutions for cleaning machinery, walls and painting for base coating

| | |
|----------------------|---------------------|
| Operating Pressure | 75 - 120 PSI |
| Avg. Air Consumption | 6.9 cfm (195 l/min) |
| Air Pressure | 90 PSI |
| Air Inlet | 1/4" NPT (PT) |
| Hose Size | 1/4" ID |



A1437 Safety Air Blow Gun w/ Extended Nozzle

- Extended nozzle with safety restricted air flow tip
- Produces side vent shield of air that confines material being blown, keeping it away from face
- Trigger regulated air flow





Air Female Coupler (Brass) - Milton Type

Female



| Model | Size |
|-------|------|
| A2540 | 1/4" |
| A2541 | 3/8" |
| A2542 | 1/2" |

Air Male Coupler (Brass) - Milton Type

Male



| Model | Size |
|-------|------|
| A2543 | 1/4" |
| A2544 | 3/8" |
| A2545 | 1/2" |

Air Female Connector (Brass) - Milton Type

Female



| Model | Size |
|-------|------------------|
| A2546 | 1/4" (2pc / Set) |
| A2547 | 3/8" (2pc / Set) |
| A2548 | 1/2" (2pc / Set) |

Air Male Connector (Brass) - Milton Type

Male



| Model | Size |
|-------|------------------|
| A2549 | 1/4" (2pc / Set) |
| A2550 | 3/8" (2pc / Set) |
| A2551 | 1/2" (2pc / Set) |

Air Hose Coupler (Brass) - Milton Type



| Model | Size |
|-------|-------|
| A2552 | 1/4" |
| A2553 | 5/16" |
| A2554 | 3/8" |
| A2555 | 1/2" |

Air Hose Connector (Brass) - Milton Type



| Model | Size |
|-------|-------------------|
| A2559 | 1/4" (2pc / Set) |
| A2560 | 5/16" (2pc / Set) |
| A2561 | 3/8" (2pc / Set) |
| A2562 | 1/2" (2pc / Set) |



A2570 5pc Air Coupler Set (Brass) - Milton Type

- Contents:
 - 1pc 1/4" Female Air Coupler
 - 1pc 1/4" Female Connector
 - 3pc 1/4" Male Connector

Air Female Coupler (Brass) - German Type



Female

| Model | Size |
|--------------|------|
| A6510 | 1/4" |
| A6511 | 3/8" |
| A6512 | 1/2" |

Air Male Coupler (Brass) - German Type



Male

| Model | Size |
|--------------|------|
| A6513 | 1/4" |
| A6514 | 3/8" |
| A6515 | 1/2" |

Air Female Connector (Brass) - German Type



Female

| Model | Size |
|--------------|------------------|
| A6516 | 1/4" (2pc / Set) |
| A6517 | 3/8" (2pc / Set) |
| A6518 | 1/2" (2pc / Set) |

Air Male Connector (Brass) - German Type



Male

| Model | Size |
|--------------|------------------|
| A6519 | 1/4" (2pc / Set) |
| A6520 | 3/8" (2pc / Set) |
| A6521 | 1/2" (2pc / Set) |

Air Hose Coupler (Brass) - German Type



| Model | Size |
|--------------|-------|
| A6522 | 1/4" |
| A6523 | 5/16" |
| A6524 | 3/8" |
| A6525 | 1/2" |

Air Hose Connector (Brass) - German Type



| Model | Size |
|--------------|-------------------|
| A6529 | 1/4" (2pc / Set) |
| A6530 | 5/16" (2pc / Set) |
| A6531 | 3/8" (2pc / Set) |
| A6532 | 1/2" (2pc / Set) |

A2571 5pc Air Coupler Set (Brass) - German Type

- Contents:
 - 1pc 1/4" Female Air Coupler
 - 1pc 1/4" Female Connector
 - 3pc 1/4" Male Connector





Air Female Coupler (Brass) - Aro Type

Female



| Model | Size |
|-------|------|
| A6550 | 1/4" |
| A6551 | 3/8" |
| A6552 | 1/2" |

Air Male Coupler (Brass) - Aro Type

Male



| Model | Size |
|-------|------|
| A6553 | 1/4" |
| A6554 | 3/8" |
| A6555 | 1/2" |

Air Female Connector (Brass) - Aro Type

Female



| Model | Size |
|-------|------------------|
| A6556 | 1/4" (2pc / Set) |
| A6557 | 3/8" (2pc / Set) |
| A6558 | 1/2" (2pc / Set) |

Air Male Connector (Brass) - Aro Type

Male



| Model | Size |
|-------|------------------|
| A6559 | 1/4" (2pc / Set) |
| A6560 | 3/8" (2pc / Set) |
| A6561 | 1/2" (2pc / Set) |

Air Hose Coupler (Brass) - Aro Type



| Model | Size |
|-------|-------|
| A6562 | 1/4" |
| A6563 | 5/16" |
| A6564 | 3/8" |
| A6565 | 1/2" |

Air Hose Connector (Brass) - Aro Type



| Model | Size |
|-------|-------------------|
| A6569 | 1/4" (2pc / Set) |
| A6570 | 5/16" (2pc / Set) |
| A6571 | 3/8" (2pc / Set) |
| A6572 | 1/2" (2pc / Set) |



A2572 5pc Air Coupler Set (Brass)- Aro Type

- Contents:
 - 1pc 1/4" Female Air Coupler
 - 1pc 1/4" Female Connector
 - 3pc 1/4" Male Connector



Air Female Coupler (Steel) - Nitto Type

Female



| Model | Size |
|-------|------|
| A2510 | 1/4" |
| A2511 | 3/8" |
| A2512 | 1/2" |

Air Female Coupler (Steel) - Nitto Type

Male



| Model | Size |
|-------|------|
| A2513 | 1/4" |
| A2514 | 3/8" |
| A2515 | 1/2" |

Air Female Connector (Steel) - Nitto Type

Female



| Model | Size |
|-------|------------------|
| A2516 | 1/4" (2pc / Set) |
| A2517 | 3/8" (2pc / Set) |
| A2518 | 1/2" (2pc / Set) |

Air Male Connector (Steel) - Nitto Type

Male



| Model | Size |
|-------|------------------|
| A2519 | 1/4" (2pc / Set) |
| A2520 | 3/8" (2pc / Set) |
| A2521 | 1/2" (2pc / Set) |

Air Hose Coupler (Steel) - Nitto Type



| Model | Size |
|-------|-------|
| A2522 | 5/16" |
| A2523 | 3/8" |
| A2524 | 1/2" |

Air Hose Connector (Steel) - Nitto Type



| Model | Size |
|-------|-------------------|
| A2528 | 5/16" (2pc / Set) |
| A2529 | 3/8" (2pc / Set) |
| A2530 | 1/2" (2pc / Set) |

Air Hose Coupler (Steel) - Nitto Type



| Model | Size |
|-------|--------------|
| A2525 | 5mm x 8mm |
| A2526 | 6.5mm x 10mm |
| A2527 | 8mm x 12mm |

Air Hose Connector (Steel) - Nitto Type



| Model | Size |
|-------|--------------------------|
| A2531 | 5mm x 8mm (2pc / Set) |
| A2532 | 6.5mm x 10mm (2pc / Set) |
| A2533 | 8mm x 12mm (2pc / Set) |



A2573 Air Coupler Set (Steel) - Nitto Type

- Contents:
 - 1pc 1/4" Female Air Coupler
 - 1pc 1/4" Female Connector
 - 3pc 1/4" Male Connector



A1464 18pc Air Tool Accessory Kit (German Type)

A1460 18pc Air Tool Accessory Kit (Milton Type)

- Complete kit for professional or home use
- Includes most popular air tool accessories
- Corrosion resistant brass couplers & connectors



A2508 1/4" Air Swivel Connector

- Keeps air line straight without kinking
- 360° Rotation at both points for complete tool maneuverability



A2509 1/4" Air Swivel Connector

- Keeps air line straight without kinking
- 360° Rotation at both points for complete tool maneuverability



Air Hose Repair Connector (Brass)



Splicer

| Model | Size |
|-------|-------|
| A6533 | 1/4" |
| A6534 | 5/16" |
| A6535 | 3/8" |
| A6536 | 1/2" |

A1001 3" Cutoff Wheel Set

A1002 50pc 3" Cutoff Wheels

- Use with utility cut-off tools
- 3" (75mm) Diameter, 1/16" thickness
- 3/8" Arbor hole fits all brands of air cut-off tools
- Great for cutting sheet metal, metal hardware and fasteners



A1705 9pc 2" Air Sanding Pad Set

- Use with angle head die grinder/sanders
- Includes 6pc 2" sanding disc pads and 3pc 2" surface conditioning disc pads
- Ideal for paint and body shops





A1101 10pc Grinding Stone Set

- Use with air die grinders
- Shaped to suit all grinding applications



A1426 Air Regulator

- Standard 1/4" male and 1/4" female fittings
- Knurled grip for precise airflow adjustment
- Corrosion resistant brass construction
- Increases / decreases air pressure as desired



A1428 Oil & Water Separator

- Separates water from compressed air
- Includes drain valve for periodic draining
- 150 PSI Maximum in-line pressure
- Removes water and oil condensates
- Provides uniform spray painting results



A1429 In-Line Air Mini Oiler

- Lubricates air tools to ensure durability
- Attaches between tool and air hose to lubricate tool during use
- Not to be used for spray painting tools



A1435 Air Tire Chuck

- Corrosion resistant, durable brass construction
- Angled head with rubber gasket for easy access and leak-free seating on type valves
- 1/4" Female



A1430 Tire Inflator w/ Gauge

- 10-120 lbs pressure gauge with easy-to-read scale and 2 lbs increments
- 12" heavy duty rubber air hose, 1/4" female
- Cast aluminum alloy body with heavy duty valve to resist corrosion



A1436 Dual Head Air Tire Chuck

- Corrosion resistant brass tube
- Angled dual head
- Rubber gasket ensures airtight seal
- 1/4" Female



A1431 Air Tire Inflator with Gauge

- Makes accurate inflation pressure simple and fast
- Well-balanced pistol grip for easy handling
- Ideal for automotive tires, farm equipment tires, bicycle tires and most other inflatables





A1706 2" Air Sanding Pad Adaptor w/ Shank

- Grinds, smooths and finishes rough areas
- Flexible disc holders are made of reinforced rubber
- Can use with both sanding discs and conditioning discs
- Maximum 30,000 rpm
- Includes 6mm (1/4") shank
- For use with A3028



A1441 Teflon Tape (1/2" x 260")

- Adds extra seal at threaded joints



A1407 Jitterbug Sander Pad

- Use with A4244 or A4243 jitterbug sanders



A1401 Straight Line Sander Pad

- Use with A4249 straight line sanders



Polyurethane (PU) Coiled Hose (Braided)

- Polyurethane resin nylon braided hose
- Brass swivel end fittings with plastic protection guard
- 200 PSI maximum working pressure

A3326 1/4" x 25Ft PU Air Hose

A3327 1/4" x 50Ft PU Air Hose

A3331 3/8" x 25Ft PU Air Hose

A3332 3/8" x 50Ft PU Air Hose



PVC Air Hose

- Double strand polyester braiding
- 1/4" Solid brass fittings
- 300 PSI maximum working pressure

A3533 3/8" x 25Ft (7.6m) PVC Air Hose

A3534 3/8" x 50Ft (15m) PVC Air Hose

Nylon Recoil Air Hose

- 1/4" brass end fittings
- Self-retracting nylon hose
- Chemical and corrosion resistant
- 200 PSI maximum air pressure
- Use with all air tools and related equipment

A3221 1/4" 25Ft Nylon Recoil Air Hose**A3222** 1/4" 50Ft Nylon Recoil Air Hose**Rubber Air Hose**

- 3/8" ID hose with 1/4" brass fittings
- Up to 250 PSI working pressure
- Resists oil, kink, abrasion, weather and ozone

A3531 25Ft (7.6m) 3/8" Rubber Air Hose**A3532** 50Ft (15m) 3/8" Rubber Air Hose**Whip Air Hose**

- Tough, flexible rubber hose that won't kink or crack
- Use between air tool and coupling
- Reinforced braiding for durability
- Up to 250 PSI working pressure
- Resists oil, kink, abrasion, weather and ozone

A3347 1/4" x 2Ft (600mm) Whip Air Hose**A3350** 3/8" x 2Ft (600mm) Whip Air Hose**A1414** 12" Air Grease Gun Flexible Hose w/ Coupler

- Ideal for lubricating machine, vehicle, farm and garden-equipment
- Heavy-duty flexible hose reaches confined spaces
- Use with air-powered grease guns





A1412 Quick Change Retainer Spring

- Use with AmPro AR3101 Professional Air Hammer
- Safety chisel holding device
- Heavy duty spring with remover lever



A1418 3/8" Keyless Drill Chuck

A1419 1/2" Keyless Drill Chuck

- High quality chuck constructed for fast and easy bit changing without use of wrench
- Use with 3/8" and 1/2" air drills



A1424 5pc Saw Blade set (24 Teeth)

A1425 5pc Saw Blade set (32 Teeth)

- Use with air body saws
- High grade bi-metal blades



A1702 5pc Air Chisel Set

- Use with air hammers
- Chrome Molybdenum steel
- Standard 0.401" shank
- Contents: Weld Buster, Cold Chisel, Tapered Punch, and Round Nose Panel



Air Tool Repair Kits



AmPro offers comprehensive repair kits and replacement parts facilities. Repair kits consist of popular wear and tear items.

Repair Kits:

To order repair kits: Suffix "K" to the model number. For example, the repair kit for model #A2302 is #A2302K. Repair Kits may be purchased at AmPro Service Centers, or authorized AmPro dealers.

Replacement Parts:

To order replacement parts: Refer to the exploded tool diagram which accompanies each airtool. Each part has an index number. For example model #A2302 and index #1 refers to part #A2302-01. Replacement parts maybe purchased at AmPro Service Centers.