



POWER USE

THE PERFECT DRIVE

OVERVIEW

- ✔ slotted head
- ✔ cross-slotted head PH
- ✔ cross-slotted head PZ
- ✔ hexagon head
- ✔ splined head
- ✔ TORX® head
- ✔ Torque screwdriver
- ✔ Electronic screwdriver
- ✔ Hexagon socket key
- ✔ Voltage tester






DREMO PLUS 3 C


Proven strength in constant use and is very tough!




Electronic screwdriver




Hardened blade



3-component handle



Hexagon socket key



T-handle



Features



Cold pressed blade

Hardened blade

Sturdy, colourless core



Hard component

Soft component

Permanently marked



Permanent, form-fit joint between handle and blade

1

The soft component in the rear part of the handle lies especially well in the hand. It permits the full force of the hand to be employed in turning the screwdriver and prevents early tiredness when the tool is used continually.

2


The robust core is in the inside of the handle. It absorbs the force from the outer components and transfers it safely to the shaft.

3

The hard component in the front part of the handle has been designed to make fast turning with low resistance much easier.

4

In the case of screws which have become stuck, the forged-on hexagon bolster permits an increase in the torque with the use of an adjustable spanner. (Only screwdrivers 2154SK, 2160SK and 2154)

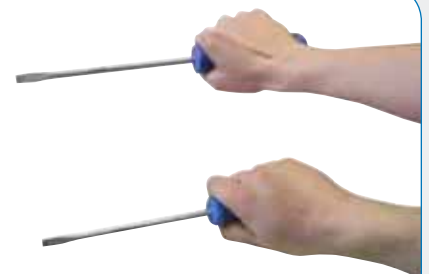

Features

Good torque transfer, irrespective of hand size

5

The blade in chrome vanadium steel is fully hardened over the whole length and thus fulfills all the requirements for safe working.

2153

SCREWDRIVER for slotted head screws, stubby

- ✓ To DIN ISO 2380-2, blade tip DIN ISO 2380-1 Form B
- ✓ Blade in vanadium plus steel
- ✓ 1-component handle, blue, with hanging hole



Code	No.	mm	mm	Ø	mm	mm	mm	mm	mm
1531174	2153 4	0.8	4.0	4,0	25	75	25	10	
1482432	2153 5,5	1.0	5.5	5,5	25	75	30	10	
1531182	2153 6,5	1.2	6.5	6,5	25	75	35	10	
1531190	2153 8	1.2	8.0	8,0	25	75	40	10	

2154

3C-SCREWDRIVER for slotted head screws

- ✓ Blade with hexagon bolster
- ✓ To DIN ISO 2380-2, blade tip DIN ISO 2380-1 Form A
- ✓ Blade in vanadium plus steel
- ✓ 3-component handle with hanging hole
- ✓ * not standardised



Code	No.	*	mm	mm	Ø	mm	mm	mm	mm
1828681	2154 3,5	*	0.6	3.5	4	75	180	8	66
6682490	2154 4,5	*	0.8	4.5	5	100	200	8	67
6682570	2154 5,5		1.0	5.5	5	100	200	8	68
6682650	2154 6,5		1.2	6.5	6	125	235	10	95
6682730	2154 8		1.2	8.0	7	150	270	13	157
6682810	2154 10		1.6	10.0	8	175	295	13	187
6683030	2154 12		2.0	12.0	9	200	320	16	233
1531158	2154 14		2.5	14.0	11	250	370	16	295

2170

3C-SCREWDRIVER for slotted head screws, insulated blade

- ✓ To DIN ISO 2380-2, blade tip DIN ISO 2380-1 Form B
- ✓ Blade in vanadium plus steel
- ✓ 3-component handle with hanging hole



Code	No.	mm	mm	Ø	mm	mm	mm	mm	mm
6678700	2170 2,5	0.4	2.5	2,5	75	155	25	10	
6678890	2170 3	0.5	3.0	3,0	75	155	27	10	
6678970	2170 4	0.8	4.0	4,0	100	190	46	10	
6679000	2170 5,5	1.0	5.5	5,5	125	225	79	10	
6679190	2170 6,5	1.2	6.5	6,5	150	260	107	10	



2160 PH

3C-SCREWDRIVER for cross-slotted head screws PH

- ✓ To DIN ISO 8764, tip to DIN ISO 8764-1 PH
- ✓ Blade in vanadium plus steel
- ✓ 3-component handle with hanging hole
- ✓ Size 3 and 4 blade with hexagon bolster
- ✓ * not standardised



Code	No.	*	PH	Ø	mm	mm	mm	mm	mm
6683110	2160 PH 0		0	3,0	60	140	25	10	
6683380	2160 PH 1		1	4,5	80	180	55	10	
6683700	2160 PH 1-200		1	4,5	200	300	74	10	
6683460	2160 PH 2		2	6,0	100	210	90	10	
6683890	2160 PH 2-200		2	6,0	200	310	111	10	
1646516	2160 PH 2-300	*	2	6,0	300	410	135	1	
1646524	2160 PH 2-400	*	2	6,0	400	510	156	1	
6683540	2160 PH 3		3	8,0	150	270	13	177	10
6683620	2160 PH 4		4	10,0	200	320	16	265	10

2161 PH

SCREWDRIVER for cross-slotted head screws PH, stubby

- ✓ To DIN ISO 8764, tip to DIN ISO 8764-1 PH
- ✓ Blade in vanadium plus steel
- ✓ 1-component handle, blue, with hanging hole



Code	No.	PH	Ø	mm	mm	mm	mm	mm
1482440	2161 PH 1	1	4,5	25	75	30	10	
1531204	2161 PH 2	2	6,0	25	75	32	10	

2160 PZ

3C-SCREWDRIVER for cross-slotted head screws PZ

- ✓ To DIN ISO 8764, tip to DIN ISO 8764-1 PZ
- ✓ Blade in vanadium plus steel
- ✓ 3-component handle with hanging hole
- ✓ Size 3 and 4 blade with hexagon bolster



Code	No.	PZ	Ø	mm	mm	mm	mm	mm
6683970	2160 PZ 0	0	3,0	60	140	25	10	
6684000	2160 PZ 1	1	4,5	80	180	59	10	
6684190	2160 PZ 2	2	6,0	100	210	90	10	
6684270	2160 PZ 3	3	8,0	150	270	13	177	10
6684350	2160 PZ 4	4	10,0	200	320	16	265	10

2161 PZ

SCREWDRIVER for cross-slotted head screws PZ, stubby

- ✓ To DIN ISO 8764, tip to DIN ISO 8764-1 PZ
- ✓ Blade in vanadium plus steel
- ✓ 1-component handle, blue, with hanging hole




Code	No.	PZ	Ø	mm	mm	mm	mm	mm
1550608	2161 PZ 1	1	4,5	25	75	25	10	
1550616	2161 PZ 2	2	6,0	25	75	32	10	



2163 BTX

3C-SCREWDRIVER for recessed TORX® head screws

- Blade in vanadium plus steel
- 3-component handle with hanging hole
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Code	No.	✱	mm	mm	Ø	mm	mm	mm	mm
1828703	2163 BTX T3	T3	M1,2 - M1,4	1.13	3,0	60	140	28	10
1828711	2163 BTX T4	T4	M1,4	1.29	3,0	60	140	27	10
1616471	2163 BTX T5	T5	M1,8	1.42	3,0	60	140	24	10
6685400	2163 BTX T6	T6	M2	1.69	3,0	60	140	24	10
6685590	2163 BTX T7	T7	M2,5	1.99	3,0	60	140	24	10
6685670	2163 BTX T8	T8	M2,5	2.31	3,0	60	140	24	10
6685750	2163 BTX T9	T9	M3	2.50	3,0	60	140	24	10
6685830	2163 BTX T10	T10	M3 - M3,5	2.74	3,0	80	160	25	10
6685910	2163 BTX T15	T15	M3,5 - M4	3.27	3,5	80	170	39	10
6686050	2163 BTX T20	T20	M4 - M5	3.86	4,0	100	190	45	10
6686130	2163 BTX T25	T25	M4,5 - M5	4.43	4,5	100	200	62	10
6686210	2163 BTX T27	T27	M4,5 - M6	4.99	5,5	115	215	74	10
6686480	2163 BTX T30	T30	M6 - M7	5.52	6,0	115	225	93	10
6686560	2163 BTX T40	T40	M7 - M8	6.65	7,0	130	240	100	10
6686640	2163 BTX T45	T45	M8 - M10	7.82	8,0	130	250	165	10
6686720	2163 BTX T50	T50	M10	8.83	9,0	150	270	193	10

2163 TXB

3C-SCREWDRIVER for recessed TORX® head screws with pilot

- Blade in vanadium plus steel
- 3-component handle with hanging hole
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	✱	mm	mm	Ø	mm	mm	mm	mm
1828738	2163 TXB T6	T6	M2	1.69	3,0	60	140	29	10
6677570	2163 TXB T7	T7	M2,5	1.99	3,0	60	140	25	10
6677650	2163 TXB T8	T8	M2,5	2.31	3,0	60	140	25	10
6677730	2163 TXB T9	T9	M3	2.50	3,0	60	140	25	10
6677810	2163 TXB T10	T10	M3 - M3,5	2.74	3,0	80	160	27	10
6678030	2163 TXB T15	T15	M3,5 - M4	3.27	3,5	80	170	28	10
6678110	2163 TXB T20	T20	M4 - M5	3.86	4,0	100	190	36	10
6678380	2163 TXB T25	T25	M4,5 - M5	4.43	4,5	100	200	61	10
6678460	2163 TXB T27	T27	M4,5 - M6	4.99	5,5	115	215	74	10
6678540	2163 TXB T30	T30	M6 - M7	5.52	6,0	115	225	93	10
6678620	2163 TXB T40	T40	M7 - M8	6.65	7,0	130	240	100	10

2163 BK

3C-SCREWDRIVER with ball end for in-hex screws

- Blade in vanadium plus steel
- 3-component handle with hanging hole



Code	No.	mm	Ø	mm	mm	mm	mm
1828746	2163 BK 2	2	3	75	155	31	10
6684430	2163 BK 3	3	4	75	155	31	10
6684510	2163 BK 4	4	5	100	190	49	10
6684780	2163 BK 5	5	6	100	200	76	10
6684860	2163 BK 6	6	7	125	235	103	10
6684940	2163 BK 8	8	10	150	270	193	10
6685080	2163 BK 10	10	12	150	270	280	10
6685160	2163 BK 12	12	14	160	280	364	10



3C-SCREWDRIVER SETS

2150-2160 PH

3C-SCREWDRIVER SET 6 pieces / 10 pieces

- For slotted head and cruciform head screws PH



Code	No.	mm	mm
1482319	2150-2160 PH-06 ⊖ 2150 4 5,5 6,5 8 ⊕ 2160 PH 1 2	650	1
1482343	2150-2160 PH-010 ⊖ 2150 3 4 5,5 6,5 8 ⊖ 2153 5,5 ⊕ 2160 PH 1 2 ⊕ 2161 PH 1 ⊖ 4615 3,5	780	1

2154-2160 PH-07

3C-SCREWDRIVER SET 7 pieces

- For slotted head and cruciform head screws PH



Code	No.	mm	mm
1731149	2154-2160 PH-07 ⊖ 2154 4,5 5,5 6,5 8 ⊕ 2160 PH 1 2 ⊖ 4615 3	710	1

2150-2160 PZ-06

3C-SCREWDRIVER SET 6 pieces

For slotted head and cruciform head screws PZ



Code	No.		
1482300	2150-2160 PZ-06 ⊕ 2150 4 5,5 6,5 8 ⊕ 2160 PZ 1 2	650	1

2163 TXB-05

3C-SCREWDRIVER SET 5 pieces

For recessed TORX® head screws with pilot

TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.		
1616617	2163 TXB-05 ⊕ 2163 TXB T10 T15 T20 T25 T30	240	1

2160 PHZ-06

3C-SCREWDRIVER SET 6 pieces

For cross-slotted head screws PH and PZ



Code	No.			
2003589	2160 PHZ-06 ⊕ 2160 PH 0 1 2 ⊕ 2160 PZ 0 1 2	344	1	

VS 2155 S

SCREWDRIVER SALES STAND 155 pieces

Blade in vanadium plus steel

3-component handle with hanging hole

Display made from acrylic glass, dimensions: 580 x 380 x 80 mm



Code	No.		
6424600	VS 2155 S 5x ⊖ 2150 3 4 5,5 6,5 8 10 5x ⊖ 2154 5,5 6,5 8 10 12 5x ⊖ 2153 5,5 6,5 8 5x ⊖ 2170 2,5 3 4 5,5 6,5 5x ⊕ 2160 PH 0 1 2 3 4 5x ⊕ 2161 PH 1 2 5x ⊕ 2160 PZ 0 1 2 3 4	22,5	1

2163 BTX

3C-SCREWDRIVER SET 5 pieces / 10 pieces

For recessed TORX® head screws

TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.		
1482327	2163 BTX-05 ⊕ 2163 BTX T10 T15 T20 T25 T30	380	1
1482335	2163 BTX-010 ⊕ 2163 BTX T7 T8 T9 T10 T15 T20 T25 T27 T30 T40	630	1





VS 2150-2154

SCREWDRIVER SALES STAND 48 pieces

- For slotted head screws
- Dimensions: 440 x 290 x 140 mm



Code	No.		
1948458	VS 2150-2154 4x 2150 3 4 5,5 6,5 8 10 4x 2153 5,5 6,5 4x 2154 6,5 8 10 12	8.3	1

VS 2160-2161

SCREWDRIVER SALES STAND 48 pieces

- For cross-slotted head screws PH and PZ
- Dimensions: 440 x 180 x 100 mm



Code	No.		
1948431	VS 2160-2161 4x 2160 PH 0 1 2 3 4 4x 2161 PH 1 2 4x 2160 PZ 0 1 2 3 4	8.2	1



VS 2150 XL

SCREWDRIVER SALES STAND 36 pieces

- For slotted head screws, special lengths
- Dimensions: 325 x 185 x 100 mm



Code	No.		
1948482	VS 2150 XL 4x 2150 3-100 3-150 4-150 5,5-100 5,5-150 6,5-200 8-125 8-225 10-150	6.8	1

VS 2163

SCREWDRIVER SALES STAND 40 pieces

- For recessed TORX® head screws
- Dimensions: 325 x 190 x 100 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.		
1948466	VS 2163 BTX 4x 2163 BTX T6 T7 T8 T9 T10 T15 T20 T25 T27 T30	4.8	1
1948474	VS 2163 TXB 4x 2163 TXB T6 T7 T8 T9 T10 T15 T20 T25 T27 T30	4.7	1

TORQUE SCREWDRIVER

- ✓ Ideal for serial production
- ✓ 3 Torque screwdriver handles for 3 working ranges
- ✓ 23 different plug-in blades for all common screw profiles (slotted, cruciform PH + PZ, TORX® and TORX PLUS®)
- ✓ All items are available individually - from torque screwdriver handle to each plug-in blade)

Accessories

- ✓ Activating tools and screwdriver bits as well as adaptors are listed up from page 145



2140

TORQUE SCREWDRIVER HANDLE 0.6-5.4 N-m

- ✓ Adjustable, with tactile impulse and audible signal
- ✓ For guaranteed controlled screw tightening in the range of 0.6 - 5.4 N-m
- ✓ Acc. to DIN EN ISO 6789, traceable to national standards
- ✓ Including hexagon socket key set 42 6 mm

Actuation accuracy:

- ✓ model 2140 1,5 NM: +/- 10% tolerance of the set value
- ✓ model 2140 3,0 NM and 2140 5,4 NM: +/- 6% tolerance of the set value




Code	No.	N-m	⌀ mm	mm	mm	mm
1802364	2140 1,5 NM	0,6-1,5	108	0,1	195	1
1802372	2140 3,0 NM	1,5-3,0	108	0,1	195	1
1802380	2140 5,4 NM	3,0-5,4	108	0,2	195	1

2141 IP

PLUG-IN BLADE 1/4" HEX TORX PLUS®

- ✓ TORX PLUS® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	⌀ mm	mm	mm	mm
1802658	2141 6IP	M2	170	40	1
1802666	2141 7IP	-	170	40	1
1802674	2141 8IP	M2,5 - M3	170	40	1
1802682	2141 9IP	-	170	40	1
1802690	2141 10IP	M3 - M3,5	170	40	1
1802704	2141 15IP	M3,5 - M4	170	40	1

Detailed information on products,
promotions and trade fairs
... www.gedore.com



2141 TX

PLUG-IN BLADE 1/4" HEX for recessed TORX® head screws


- ✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	⌀ mm	⌀ mm	mm	mm	mm
1802569	2141 TX T6	T6	M2	1.69	170	40
1802577	2141 TX T7	T7	M2,5	1.99	170	40
1802585	2141 TX T8	T8	M2,5	2.31	170	40
1802593	2141 TX T9	T9	M3	2.50	170	40
1802607	2141 TX T10	T10	M3 - M3,5	2.74	170	40
1802615	2141 TX T15	T15	M3,5 - M4	3.27	170	40
1802623	2141 TX T20	T20	M4 - M5	3.86	170	42
1802631	2141 TX T25	T25	M4,5 - M5	4.43	170	42

2141 IS

PLUG-IN BLADE 1/4" HEX for slotted head screws

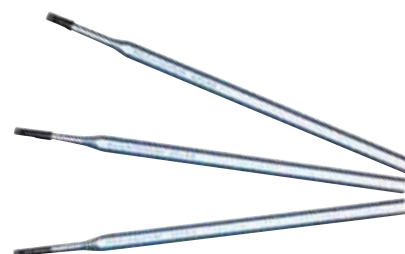

Code	No.	mm	mm	mm	mm	mm
1802453	2141 IS 3	3.0	0.5	170	40	1
1802461	2141 IS 3,5	3.5	0.6	170	40	1
1802488	2141 IS 4	4.0	0.8	170	40	1

2141 PH

PLUG-IN BLADE HEX for cross-slotted head screws PH



Code	No.	⌀ PH	⌀ mm	mm	mm	mm
1802496	2141 PH 0	0	M1,6 - M2	170	40	1
1802518	2141 PH 1	1	M2 - M3	170	40	1
1802526	2141 PH 2	2	M3,5 - M5	170	43	1



Deviant packing units see article description.




2141 PZ

PLUG-IN BLADE HEX for cross-slotted head screws PZ

6,3

1/4

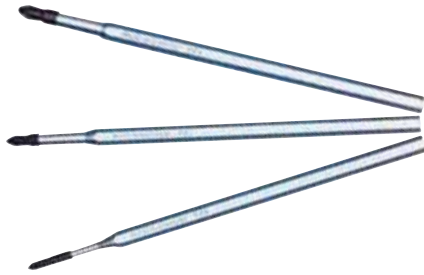

Code	No.	PZ	mm	mm	mm	
1802534	2141 PZ 0	0	M1,6 - M2	170	40	1
1802542	2141 PZ 1	1	M2 - M3	170	40	1
1802550	2141 PZ 2	2	M3,5 - M5	170	43	1

2140

TORQUE SCREWDRIVER SET 25 pieces

- Ideal for working in a small torque range, e.g. electronics, precision mechanics
- GEDORE-Check-Tool insert
- For screwdriver function simply add the 2C multi-handle with appropriate accessory

6,3

1/4

6,3

1/4



Code	No.	N-m	mm	
1953761	2140-3,0-025 680 4 6,5 685 2 2,5 3 4 5 6 690 0 1 2 D 20 4 4,5 5 5,5 6 7 8 9 10 42 6 673 L 676 699 L 2140 3,0 N-m	1,5-3,0	595	1
1802429	2140-5,4-025 680 4 6,5 685 2 2,5 3 4 5 6 690 0 1 2 D 20 4 4,5 5 5,5 6 7 8 9 10 42 6 673 L 676 699 L 2140 5,4 N-m	3,0-5,4	595	1



ELECTRONIC SCREWDRIVER

- Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- Tip additionally coated for highest precision and corrosion protection
- 2-component-handle in ergonomic design, with anti-slip surface
- Pivoting 2-component end cap with anti-slip surface and colour coding
- Colour coding of the drive type

171 IS

ELECTRONIC SCREWDRIVER for slotted head screws



Code	No.	mm	mm	mm	mm	
1845004	171 IS 1,2	1.2	60	155	12	5
6436450	171 IS 1,5	1.5	60	155	12	5
1845012	171 IS 1,8	1.8	60	155	13	5
6438660	171 IS 2	2.0	60	155	13	5
1845020	171 IS 2,5	2.5	75	170	15	5
1845039	171 IS 3	3.0	100	195	16	5

165 PH

ELECTRONIC SCREWDRIVER for cross-slotted head screws PH



Code	No.	mm	mm	mm	mm	
1845047	165 PH 000	60	155	13	5	
6442770	165 PH 00	60	155	13	5	
6442930	165 PH 0	60	155	15	5	
1845055	165 PH 1	80	175	16	5	

165 TX

ELECTRONIC SCREWDRIVER for recessed TORX® head screws

- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	*	mm	mm	mm	mm	
1845098	165 TX T3	T3	M1,2 - M1,4	1.13	60	155	16 5
1845101	165 TX T4	T4	M1,4	1.29	60	155	16 5
1845128	165 TX T5	T5	M1,8	1.42	60	155	17 5
1845136	165 TX T6	T6	M2	1.69	60	155	19 5
1845144	165 TX T7	T7	M2,5	1.99	60	155	19 5
1845152	165 TX T8	T8	M2,5	2.31	60	155	19 5
1845160	165 TX T9	T9	M3	2.50	60	155	19 5
1845179	165 TX T10	T10	M3 - M3,5	2.74	60	155	20 5
1845187	165 TX T15	T15	M3,5 - M4	3.27	60	155	23 5
1845195	165 TX T20	T20	M4 - M5	3.86	80	175	29 5

164 IN

ELECTRONIC SCREWDRIVER for in-hex screws



Code	No.	mm	mm	mm	mm	mm
1845063	164 IN 0,7	0.7	60	155	12	5
1845071	164 IN 0,9	0.9	60	155	12	5
6443150	164 IN 1,3	1.3	60	155	13	5
6443230	164 IN 1,5	1.5	60	155	13	5
6443310	164 IN 2	2.0	60	155	13	5
6443580	164 IN 2,5	2.5	60	155	14	5
6443740	164 IN 3	3.0	60	155	16	5



165-171-06

ELECTRONIC SCREWDRIVER SET
6 pieces

- For slotted and cross-slotted head screws PH



Code	No.	mm	mm
1902849	165-171-06 ⊕ 165 PH 000 00 0 ⊖ 171 IS 1,2 1,8 2,5	385	1

165 TX-06

ELECTRONIC SCREWDRIVER SET
6 pieces

- For recessed TORX® head screws
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	mm
1902857	165 TX-06 ⊕ 165 TX T5 T6 T7 T8 T9 T10	415	1

1021

ELECTRONIC SCREWDRIVER SET 7 pieces

- In plastic case



Code	No.	mm	mm
6601830	1021 ⊖ 171 IS 1,2 1,5 2 ⊕ 165 PH 00 0 8305-2 8306-5	620	1

VARIOUS

149

MAGNETIZER AND DEMAGNETIZER

- Demagnetises screwdrivers, tweezers and similar tools made from steel
- Blue housing, made from high-quality plastic, unbreakable, cadmium-free



Code	No.	L	H	W	mm	mm
6416500	149	52	26	50	85	1

156 S

SQUARE BLADED AWL

- Blue handle with hanging hole
- Blade bright nickel-plated



Code	No.	mm	mm	mm	mm
6424520	156 S	100	200	75	10

SCREWDRIVER WITH WOODEN HANDLE

- Blade tapered right through the handle, chrome-plated
- GEDORE-vanadium steel 50CrV4
- Hexagon bolster for extra power
- Hardwood handle, clear varnished with leather cap

147

SCREWDRIVER for slotted head screws

- Similar to DIN ISO 2380-2 Row B+C, blade tip DIN ISO 2380-1 Form A



Code	No.	mm	mm	mm	mm	mm	mm	mm
6413830	147 3,5	3.5	0.6	75	170	6	47	5
6413910	147 4,5	4.5	0.8	90	185	6	50	5
6414050	147 5,5	5.5	1.0	100	200	8	70	10
6414130	147 7	7.0	1.2	125	235	10	110	10
6414210	147 9	9.0	1.4	150	270	12	180	10
6414480	147 10	10.0	1.6	175	300	12	230	5
6414560	147 12	12.0	2.0	200	330	13	280	5





148

SCREWDRIVER for slotted head screws

- Similar to DIN ISO 2380-2 Row B+C, blade tip DIN ISO 2380-1 Form A
- Hexagon blade with forged bolster



Code	No.	mm	mm	mm	mm	mm	mm	mm
6415020	148 5,5	5.5	0.8	100	200	6	85	5
6415100	148 7	7.0	1.0	125	230	7	130	5
6415290	148 8	8.0	1.2	150	270	8	190	5
6415370	148 10	10.0	1.6	175	300	8	260	5
6415450	148 12	12.0	2.0	200	330	12	340	5
6415530	148 14	14.0	2.5	250	390	12	530	5

162

SCREWDRIVER for cross-slotted head screws PH

- Similar to DIN ISO 8764-2, tip DIN ISO 8764-1 PH



Code	No.	PH	mm	mm	mm	mm	mm
6429400	162 1	1	80	180	6	55	5
6429590	162 2	2	100	210	10	95	5
6429670	162 3	3	150	275	12	210	5
6429750	162 4	4	200	340	17	350	5

147-04

SCREWDRIVER SET 4 pieces

- Work orientated assortment packed in environmentally-friendly cardboard box



Code	No.	mm	mm
6422820	147-04	5,5 7 9 10	600

Detailed information on products,
promotions and trade fairs
... www.gedore.com



147-162-05

SCREWDRIVER SET 5 pieces

- Work orientated assortment packed in environmentally-friendly cardboard box




Code	No.	mm	mm
6423120	147-162-05	5,5 7 9	450
		162 1 2	

HEXAGON SOCKET KEYS

42 T

HEXAGON SCREWDRIVER WITH T-HANDLE for in-hex screws

- Blue handle with hanging hole



Code	No.	mm	L ₁	L ₂	mm	mm
1531360	42 T 2	2.0	162.5	130	24	10
6354130	42 T 2,5	2.5	192.5	160	31	10
6353670	42 T 3	3.0	222.5	190	35	10
6353750	42 T 4	4.0	249.0	210	68	10
6353830	42 T 5	5.0	279.0	240	88	10
6353910	42 T 6	6.0	309.0	270	120	10
6366730	42 T 7	7.0	329.0	290	150	10
6354050	42 T 8	8.0	349.0	310	190	10
6354210	42 T 10	10.0	369.0	330	230	10

Code	No.	mm	L ₁	L ₂	mm	mm	mm
1996010	42 T 1/8AF	1/8	229.0	190	40	1	10
1996029	42 T 5/32AF	5/32	249.0	210	68	1	10
1996037	42 T 3/16AF	3/16	279.0	240	88	1	10
1996045	42 T 1/4AF	1/4	309.0	270	120	1	10
1996053	42 T 5/16AF	5/16	349.0	310	190	1	10
1996061	42 T 3/8AF	3/8	369.0	330	230	1	10





DT 42

HEXAGON SOCKET KEY WITH T-HANDLE

for in-hex screws

- Blue handle with hanging hole
- With 2 hexagons, same size each end

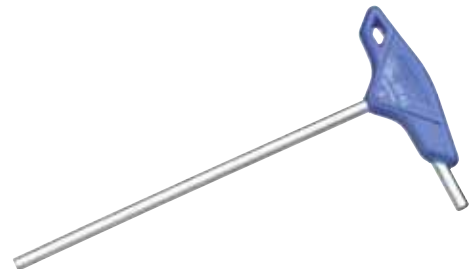


Code	No.	mm	L ₁	L ₂	L ₃	mm	mm
1476408	DT 42 2	2.0	107.0	87	12.0	15	10
1476424	DT 42 2,5	2.5	127.0	107	12.0	18	10
1476432	DT 42 3	3.0	147.0	127	12.0	22	10
1476440	DT 42 4	4.0	173.5	141	15.5	40	10
1476459	DT 42 5	5.0	193.5	161	17.5	57	10
1476467	DT 42 6	6.0	213.5	181	20.5	80	10
1476475	DT 42 7	7.0	231.0	192	28.0	120	10
1476483	DT 42 8	8.0	246.0	207	28.0	155	10
1476491	DT 42 10	10.0	261.0	222	28.0	245	10

DTT 42

TRI-T HEXAGON SOCKET KEY for in-hex

screws

- With 3 hexagons, same size each end
- T-handle fixed

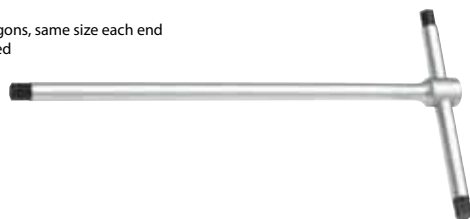


Code	No.	mm	L ₁	L ₂	Ø	mm	mm
1669540	DTT 42 3	3	150	75	5.0	40	1
1669559	DTT 42 4	4	180	90	6.0	62	1
1669567	DTT 42 5	5	180	90	7.0	87	1
1669575	DTT 42 6	6	210	105	8.0	134	1
1669583	DTT 42 8	8	250	125	9.5	215	1
1669591	DTT 42 10	10	300	150	12.0	405	1

42

HEXAGON SOCKET KEY for in-hex

screws

- Acc. to DIN ISO 2936 (only metric sizes)
- Zinc-plated up to size 12 mm, chrome-plated up from size 14 mm



Code	No.	mm	L ₁	L ₂	mm	mm
6342200	42 0,7	0.7	33.0	7.0	1	10
6342390	42 0,9	0.9	33.0	11.0	1	10
6342470	42 1,3	1.3	41.0	13.0	1	10
6340260	42 1,5	1.5	46.5	15.5	1	10
6340340	42 2 (5/64AF)	2.0	52.0	18.0	2	10
6340420	42 2,5	2.5	58.5	20.5	3	10
6340500	42 3	3.0	66.0	23.0	5	10
6340690	42 4	4.0	74.0	29.0	10	10
6340770	42 5	5.0	85.0	33.0	18	10
6340850	42 6	6.0	96.0	38.0	29	10
6340930	42 7	7.0	102.0	41.0	42	10
6341070	42 8	8.0	108.0	44.0	58	10
6341150	42 9	9.0	114.0	47.0	78	10
6341230	42 10	10.0	122.0	50.0	100	10
6341310	42 12	12.0	137.0	57.0	163	10
6341580	42 14	14.0	154.0	70.0	260	10
6341660	42 17	17.0	177.0	80.0	420	10
6341740	42 19	19.0	199.0	89.0	600	10
6341820	42 22	22.0	222.0	102.0	910	10
6341900	42 24	24.0	248.0	114.0	1210	5
6342550	42 27	27.0	277.0	127.0	1700	5
6342630	42 30	30.0	315.0	142.0	2500	1
6342710	42 32	32.0	347.0	157.0	3200	1


Code	No.	AF	L ₁	L ₂	mm	mm
6342120	42 3/64AF	3/64	41.0	13.0	2	10
6342040	42 1/16AF	1/16	46.5	15.5	1	10
6340340	42 2 (5/64AF)	5/64	52.0	18.0	2	10
6344330	42 3/32AF	3/32	56.5	20.5	3	10
6344410	42 1/8AF	1/8	60.0	23.0	5	10
6344680	42 5/32AF	5/32	67.0	26.0	9	10
6344760	42 3/16AF	3/16	73.0	30.0	14	10
6344840	42 7/32AF (5,5MM)	7/32	82.0	32.0	21	10
6344920	42 1/4AF	1/4	92.0	36.5	31	10
6345060	42 5/16AF	5/16	102.0	43.0	54	10
6345140	42 3/8AF	3/8	115.0	49.0	87	10
6345220	42 1/2AF	1/2	142.0	61.0	193	10
6345300	42 9/16AF	9/16	154.0	66.0	270	10
6345490	42 5/8AF	5/8	168.0	76.0	350	5
6345570	42 3/4AF	3/4	199.0	89.0	580	5



42 EL

HEXAGON SOCKET KEY for in-hex screws, extra long

- Acc. to DIN ISO 2936 (only metric sizes)
- Zinc-plated up to size 12 mm, chrome-plated up from size 14 mm



Code	No.	mm	L ₁	L ₂	mm	mm
6350810	42 EL 2 (5/64AF)	2.0	102.0	18.0	3	10
6351030	42 EL 2,5	2.5	114.5	20.5	5	10
6351110	42 EL 3	3.0	129.0	23.0	9	10
6351380	42 EL 4	4.0	144.0	29.0	18	10
6351460	42 EL 5	5.0	165.0	33.0	31	10
6351540	42 EL 6	6.0	186.0	38.0	51	10
6351620	42 EL 8	8.0	208.0	44.0	100	10
6351700	42 EL 10	10.0	234.0	50.0	170	10
6351890	42 EL 12	12.0	262.0	57.0	280	10
6351970	42 EL 14	14.0	294.0	70.0	440	10


Code	No.	AF	L ₁	L ₂	mm	mm
1543377	42 EL 3/32AF	3/32	114.5	20.5	3	10
1543318	42 EL 1/8AF	1/8	129.0	23.0	9	10
1543326	42 EL 5/32AF	5/32	144.0	29.0	14	10
1543334	42 EL 3/16AF	3/16	165.0	33.0	26	10
1543342	42 EL 7/32AF (5,5MM)	7/32	186.0	38.0	45	10
1543369	42 EL 1/4AF	1/4	197.0	41.0	49	10
1543350	42 EL 5/16AF	5/16	208.0	44.0	95	10
1543385	42 EL 3/8AF	3/8	234.0	50.0	155	10
1543393	42 EL 1/2AF	1/2	277.0	63.0	323	10
1543407	42 EL 9/16AF	9/16	294.0	70.0	455	10

42 KEL

HEXAGON SOCKET KEY with ball end, for in-hex

screws, extra long

- Phosphated




Code	No.	mm	L ₁	L ₂	mm	mm
1563556	42 KEL 1,5	1.5	91.5	15.5	2	10
6370090	42 KEL 2	2.0	102.0	18.0	3	10
6370170	42 KEL 2,5	2.5	114.5	20.5	5	10
6370250	42 KEL 3	3.0	129.0	23.0	8	10
6370330	42 KEL 4	4.0	144.0	29.0	20	10
6370410	42 KEL 5	5.0	165.0	33.0	30	10
6370680	42 KEL 6	6.0	186.0	38.0	50	10
1729241	42 KEL 7	7.0	197.0	41.0	72	10
6370760	42 KEL 8	8.0	208.0	44.0	100	10
6370840	42 KEL 10	10.0	234.0	50.0	180	10
6370920	42 KEL 12	12.0	262.0	57.0	290	10



42 Z

HEXAGON SOCKET KEY with pilot, for in-hex screws
 ▶ To DIN 6911
 ▶ * not standardised



Code	No.	*	mm	L ₁	L ₂		
6342980	42 Z 3		3	63	20	5	5
6343010	42 Z 4		4	70	25	10	5
6343280	42 Z 5		5	80	28	30	5
6343360	42 Z 6		6	90	32	15	5
6343440	42 Z 7	*	7	95	34	45	5
6343520	42 Z 8		8	100	36	60	5
6343600	42 Z 10		10	112	40	105	5
6343790	42 Z 12		12	125	45	160	5
6343870	42 Z 14		14	140	56	260	5
6343950	42 Z 17		17	160	63	430	1
6344090	42 Z 19		19	180	70	620	1

42


HEXAGON SOCKET KEY SET for in-hex screws
 ▶ In blue PVC wallet
 ▶ Zinc-plated



Code	No.		
6347510	42-07 2 2,5 3 4 5 6 8	135	1
6349050	42-70 2,5 3 4 5 6 8 10	230	1
6347780	42-08 3 4 5 6 8 10 12 14	380	1
6347860	42-09 2 2,5 3 4 5 6 7 8 10	270	1
6348750	42-07 A 5/64 3/32 1/8 5/32 3/16 7/32 1/4"	93	1
6348830	42-08 A 1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16"	690	1
6348910	42-09 A 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	230	1

H 42 - H 42 EL

HEXAGON SOCKET KEY SET for in-hex screws
 ▶ In blue plastic holder (LPDE)
 ▶ Zinc-plated
 ▶ Execution K with ball end, phosphated

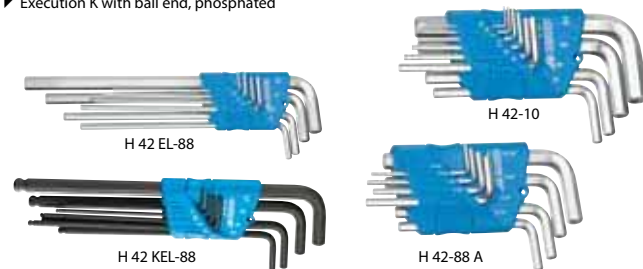

Code	No.		
1505408	H 42-10 1,3 1,5 2 2,5 3 4 5 6 8 10	254	1
1505424	H 42-88 A 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	141	1
1505416	H 42 EL-88 2 2,5 3 4 5 6 8 10	420	1
1543555	H 42 EL-88 A 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	297	1
1523988	H 42 KEL-88 2 2,5 3 4 5 6 8 10	410	1

PH 42-88

HEXAGON SOCKET KEY SET for in-hex screws
 ▶ In blue plastic holder
 ▶ Zinc-plated



Code	No.		
6352000	PH 42-88 2 2,5 3 4 5 6 8 10	245	1

S 42

HEXAGON SOCKET KEY SET for in-hex screws
 ▶ On key ring with quick release
 ▶ Zinc-plated



Code	No.		
6347430	S 42-07 2 2,5 3 4 5 6 8	144	1
6348160	S 42-09 A 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	250	1

SCL 42



HEXAGON SOCKET KEY SET for in-hex screws
 ▶ In robust metal clip
 ▶ Execution K with ball end
 ▶ Zinc-plated



Code	No.		
6347350	SCL 42-70 2,5 3 4 5 6 8 10	350	1
6354800	SCL 42-90 A 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4"	240	1
6371140	SCL 42 K-70 2,5 3 4 5 6 8 10	320	1

42 TX

SCREWDRIVER WITH T-HANDLE for recessed TORX® screws
 ▶ Blue handle with hanging hole
 ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

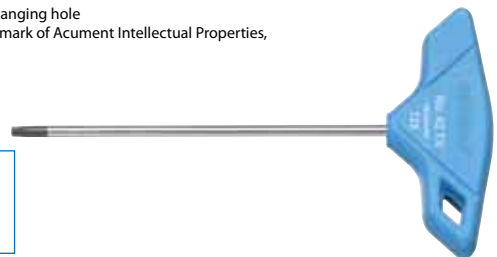


Code	No.	mm	mm	L ₁	L ₂		
1531328	42 TX T5	M1,8	1.42	107.0	87	30	10
1531336	42 TX T6	M2	1.70	107.0	87	30	10
1531344	42 TX T7	M2,5	1.99	107.0	87	30	10
1531352	42 TX T8	M2,5	2.31	119.5	87	30	10
6361180	42 TX T9	M3	2.50	139.5	107	30	10
6362070	42 TX T10	M3 - M3,5	2.74	139.5	107	30	10
6362820	42 TX T15	M3,5 - M4	3.27	159.5	127	31	10
6362900	42 TX T20	M4 - M5	3.86	173.5	141	33	10
6365330	42 TX T25	M4,5 - M5	4.43	180.0	141	50	10
6365410	42 TX T27	M4,5 - M6	4.99	200.0	161	53	10
6365680	42 TX T30	M6 - M7	5.52	200.0	161	61	10
6365760	42 TX T40	M7 - M8	6.65	220.0	181	71	5
6365840	42 TX T45	M8 - M10	7.82	231.0	192	142	5
6365920	42 TX T50	M10	8.83	246.0	207	165	5

43 TX

CRANKED SOCKET SCREWDRIVER for recessed TORX® screws

✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	mm	L ₁	L ₂	mm	mm
6363550	43 TX T6	M2	1.69	42	16	2	5
6363630	43 TX T7	M2,5	1.99	48	16	3	5
6363710	43 TX T8	M2,5	2.31	48	16	3	5
6363980	43 TX T9	M3	2.50	48	16	3	5
6364010	43 TX T10	M3 - M3,5	2.74	51	17	3	5
6364280	43 TX T15	M3,5 - M4	3.27	54	18	5	5
6364360	43 TX T20	M4 - M5	3.86	57	19	7	5
6364440	43 TX T25	M4,5 - M5	4.43	60	20	10	5
6364520	43 TX T27	M4,5 - M6	4.99	64	21	15	5
6364600	43 TX T30	M6 - M7	5.52	70	24	20	5
6364790	43 TX T40	M7 - M8	6.65	76	26	30	5
6364870	43 TX T45	M8 - M10	7.82	83	29	40	5
6364950	43 TX T50	M10	8.83	95	32	60	5
6365090	43 TX T55	M12	11.22	108	35	120	1
6365170	43 TX T60	M14	13.25	120	38	180	1

43 KTX

CRANKED SOCKET SCREWDRIVER

with ball end for recessed TORX® screws

✓ Working angle approx. 25°

✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	mm	L ₁	L ₂	mm	mm
6367110	43 KTX T10	M3 - M3,5	2.74	73	17	4	5
6367380	43 KTX T15	M3,5 - M4	3.27	83	17	15	5
6367460	43 KTX T20	M4 - M5	3.86	94	18	7	5
6367540	43 KTX T25	M4,5 - M5	4.43	96	18	10	5
6367620	43 KTX T27	M4,5 - M6	4.99	106	20	15	5
6367700	43 KTX T30	M6 - M7	5.52	119	24	20	5
6367890	43 KTX T40	M7 - M8	6.65	132	26	30	5

43 TX-09

CRANKED SOCKET SCREWDRIVER SET for recessed TORX® screws

✓ In blue PVC wallet

✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	mm
6360960	43 TX-09	T7 T8 T9 T10 T15 T20 T25 T30 T40	90 1

H 43 TX

CRANKED SOCKET SCREWDRIVER SET for recessed TORX® screws

✓ In blue LDPE holder

✓ Execution K with ball end

✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



H 43 TX-88



H 43 KTX-07



Code	No.	mm	mm
1531417	H 43 TX-09	T7 T8 T9 T10 T15 T20 T25 T30 T40	109 1
1531425	H 43 TX-88	T9 T10 T15 T20 T25 T27 T30 T40	118 1
1531433	H 43 TX-08	T10 T15 T20 T25 T27 T30 T40 T45	155 1
1531441	H 43 KTX-07	T10 T15 T20 T25 T27 T30 T40	115 1

SCL 43 TX-80

CRANKED SOCKET SCREWDRIVER for recessed TORX® screws

✓ In robust metal clip

✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	mm
6346460	SCL 43 TX-80	T9 T10 T15 T20 T25 T27 T30 T40	250 1

DT 43 KTX


CRANKED SOCKET SCREWDRIVER WITH T-HANDLE

with ball end for recessed TORX® screws

✓ Working angle approx. 25°

✓ Blue handle with hanging hole

✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	mm	L ₁	L ₂	L ₃	mm	mm
1505521	DT 43 KTX T10	T10	M3 - M3,5	2.74	150.0	130	12.0	35 1
1505548	DT 43 KTX T15	T15	M3,5 - M4	3.27	170.0	150	12.0	40 1
1505556	DT 43 KTX T20	T20	M4 - M5	3.86	202.5	170	15.5	57 1
1505564	DT 43 KTX T25	T25	M4,5 - M5	4.43	222.5	190	17.5	80 1
1505572	DT 43 KTX T27	T27	M4,5 - M6	4.99	242.5	210	20.0	120 1
1505580	DT 43 KTX T30	T30	M6 - M7	5.52	279.0	240	28.0	155 1
1505599	DT 43 KTX T40	T40	M7 - M8	6.65	309.0	270	28.0	245 1



Detailed information on products,
promotions and trade fairs
... www.gedore.com





708

TORX® GAUGE

- Easy determination of TORX® sizes, internal E4-E16, external T10-T60
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA





Code	No.	mm	mm
1394428	708	21	1
E4 - E16 T10 - T60			

42 X

CRANKED ALLEN SOCKET SCREWDRIVER for multi-point screws INBUS®XZN

- To DIN 65253, tips DIN 2325

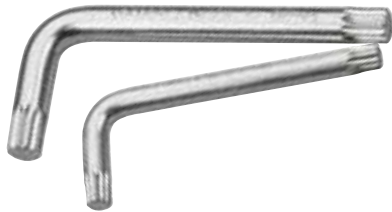


Code	No.	M	L ₁	L ₂	mm	mm
1531212	42 X 4	M 4	63	20	25	5
6350060	42 X 5	M 5	75	30	15	5
6350140	42 X 6	M 6	86	34	25	5
6350220	42 X 8	M 8	98	40	40	5
6350300	42 X 10	M 10	110	46	90	5
6350490	42 X 12	M 12	124	52	140	5
6350570	42 X 14	M 14	139	59	200	5
6350650	42 X 16	M 16	156	72	320	5
6350730	42 X 18	M 18	178	81	370	1

43

CRANKED SOCKET SCREWDRIVER for multi-spline screws RIBE®

- RIBE® = reg. trademark of Rich. Bergner



Code	No.	M	L ₁	L ₂	mm	mm
6352270	43 5	M 5	71	25	15	5
6352350	43 6	M 6	80	28	25	5
6352430	43 8	M 8	90	32	50	5
6352510	43 10	M 10	100	36	85	5
6352780	43 12	M 12	112	40	140	5
6352860	43 14	M 14	125	45	215	5



173

CRANKED SCREWDRIVER for slotted head screws

- To DIN 5200, blade tips DIN ISO 2380-1



Code	No.	mm	mm	mm	mm	mm
6437180	173 3,5	3.5	0.6	90	12	5
6437850	173 4	4.0	0.8	100	20	10
6436100	173 5,5	5.5	1.0	125	20	10
6436370	173 8	8.0	1.2	150	50	10
6437930	173 10	10.0	1.6	175	105	5
6436530	173 12	12.0	2.0	200	175	5



174

CRANKED SCREWDRIVER for cross-slotted head screws PH

- To DIN 5208, tips to DIN ISO 8764-1 PH



Code	No.	PH	M	mm	mm	mm
6436880	174 1	1-2	M2 - M5	100	30	10
6436960	174 3	3-4	M6 - M10	200	110	5

VOLTAGE TESTER

4610

CAR LIGHT TESTER

- For testing 6-24 Volt
- Compact brass model
- With cable and alligator crimp



Code	No.	mm	mm	mm
6698570	4610	125	80	10

4611

VOLTAGE TESTER

- For 6-24 Volt
- With cable and alligator crimp



Code	No.	mm	mm	mm	mm	mm
6698650	4611	3	55	115	27	10

4615

VOLTAGE TESTER

- For 220-250 Volt AC
- Blade nickel-plated, fully insulated blade conforming to DIN VDE 0680-6
- Handle and insulation in GEDORE blue
- 4615 3 with metal clip and grey cap



Code	No.	mm	mm	mm	mm	mm
6699110	4615 3	0.5	3.0	60	140	16
6699380	4615 3,5	0.6	3.5	90	180	26