





RUGGED AND VERSATILE SOCKET SETS DESIGN FOR UNIVERSAL USE

OVERVIEW

- Ratchets
- Friction ratchets
- Socket sets
- Bits
- Sockets
- Accessories
- Impact tools







U-20 RATCHETS

Design-orientated premium ratchets



WORKING PRINCIPLE



SLIDING T BAR with release



SOCKETS



The range includes an unparalleled variety of sockets to meet all industrial and professional requirements, including the socket with the snug fitting UNIT-Drive profile.







MANUFACTURING PROCESS FOR SOCKETS

Like all hot-forged tools, GEDORE sockets(*) are characterised by their homogeneous structure. The fibres run in parallel with the contour of the tool. The uninterrupted fibre orientation prevents residual stresses in the structure. In cold-forged tools, the fibres or lines of stress may deviate. Fibre orientation is equally important in the natural world. In a tree, the soft fibre orientation, is parallel to the branch shape the wood is resistant to bending and twisting. If fibres become kinked, the branch loses its stability at the kink point and breaks. The low-stress GEDORE sockets withstand suddenly occurring peak forces better than cold formed sockets.

(*) Not applicable to 1/4" hexagonal sockets

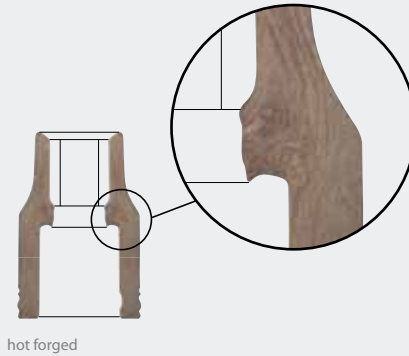

hot forged

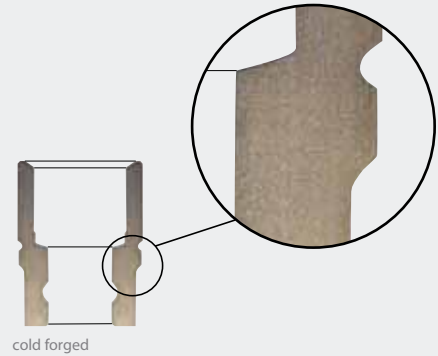

cold forged



Blank cropped to size from 31CrV3



Hot forged in the forging press.



Accurately cropped to size.



Outside diameter turned and knurled. For this and the next step, GEDORE uses high-tech machinery from its in-house special mechanical engineering department.



Counterbored, square socket drive fluted (ball-stop flute), manufacturer and socket size permanently stamped.



Degreased - grease would destroy the protective gas atmosphere in hardening.



Hardened under protective gas atmosphere, followed by annealing.



Sand blasted as preparation for surface coating.



Nickel-plated and matt-chrome-plated to prevent dazzle. The electrolytically applied nickel coating ensures corrosion protection. The electroplated chrome improves the look and gives the socket a perfect finish.



6.3 (1/4") SQUARE DRIVE

6.3 1/4" 6.3 1/4"

SOCKETS 6.3 (1/4")


20

SOCKET 1/4" hexagon

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated

6.3

1/4"



Code	No.	Ø mm	L	d ₁	d ₂	t	ISO	EN
6165400	20 4	4.0	24.7	6.9	12.0	2.0	9	10
6165590	20 4,5	4.5	24.7	7.5	12.0	2.3	10	5
6165670	20 5	5.0	24.7	8.2	12.0	2.5	10	10
6165750	20 5,5	5.5	24.7	8.8	12.0	3.0	10	10
6165830	20 6	6.0	24.7	9.4	12.0	3.5	10	10
6165910	20 7	7.0	24.7	11.0	12.0	4.0	12	10
6166050	20 8	8.0	24.7	12.0	12.0	5.0	14	10
6166130	20 9	9.0	24.7	13.0	13.0	5.0	16	10
6166210	20 10	10.0	24.7	14.7	14.7	6.0	20	10
6166480	20 11	11.0	24.7	16.0	16.0	7.0	25	10
6166560	20 12	12.0	24.7	17.0	17.0	8.0	30	10
6166640	20 13	13.0	24.7	18.0	18.0	8.0	35	10
6166720	20 14	14.0	24.7	19.7	19.7	10.0	40	10

Code	No.	Ø AF	L	d ₁	d ₂	t	ISO	EN
6167020	20 3/16AF	3/16	24.7	7.8	12.0	2.5	10	1
6167100	20 7/32AF	7/32	24.7	8.8	12.0	3.0	10	1
6167290	20 1/4AF	1/4	24.7	9.8	12.0	3.5	10	1
6167370	20 9/32AF	9/32	24.7	11.0	12.0	4.0	12	1
6167450	20 5/16AF	5/16	24.7	12.0	12.0	5.0	14	1
6167530	20 11/32AF	11/32	24.7	13.0	13.0	5.0	16	1
6167610	20 3/8AF	3/8	24.7	14.0	14.0	6.0	20	1
6167880	20 7/16AF	7/16	24.7	16.0	16.0	7.0	25	1
6167960	20 1/2AF	1/2	24.7	18.0	18.0	8.0	35	1
6161840	20 9/16AF	9/16	24.7	20.0	20.0	10.0	40	1


Code	No.	Ø mm	L	d ₁	d ₂	t	ISO	EN
6168500	20 8BA	8	24.7	6.7	12.0	2.0	9	1
6168690	20 7BA	7	24.7	7.3	12.0	2.3	10	1
6168770	20 6BA	6	24.7	8.0	12.0	2.5	10	1
6168850	20 5BA	5	24.7	8.8	12.0	3.0	10	1
6168930	20 4BA	4	24.7	9.8	12.0	3.5	10	1
6169070	20 3BA	3	24.7	11.0	12.0	4.0	12	1
6169150	20 2BA	2	24.7	12.0	12.0	5.0	14	1
6169230	20 1BA	1	24.7	13.0	13.0	5.0	16	1
6169310	20 0BA	0	24.7	15.0	15.0	7.0	20	1



20 L

SOCKET 1/4" long, hexagon

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated



6.3

1/4"



Code	No.	Ø mm	L	d ₁	d ₂	t	ISO	EN
6191400	20 L 4	4.0	50	6.9	12.0	3.0	15	5
6191590	20 L 4,5	4.5	50	7.5	12.0	3.4	15	5
6191670	20 L 5	5.0	50	8.2	12.0	3.7	15	5
6191750	20 L 5,5	5.5	50	8.8	12.0	4.5	20	5
6191830	20 L 6	6.0	50	9.4	12.0	5.2	20	5
6191910	20 L 7	7.0	50	11.0	12.0	6.0	20	5
6192050	20 L 8	8.0	50	12.0	12.0	7.5	25	10
6192130	20 L 9	9.0	50	13.0	13.0	7.5	30	5
6192210	20 L 10	10.0	50	14.0	14.0	9.0	35	10
6192480	20 L 11	11.0	50	16.0	16.0	10.5	45	5
6192560	20 L 12	12.0	50	17.0	17.0	12.0	50	5
6192640	20 L 13	13.0	50	18.0	18.0	12.0	65	10

Code	No.	Ø AF	L	d ₁	d ₂	t	ISO	EN
6192800	20 L 3/16AF	3/16	50	7.8	12.0	3.7	15	1
6192990	20 L 7/32AF	7/32	50	8.8	12.0	4.5	20	1
6193020	20 L 1/4AF	1/4	50	9.8	12.0	5.2	20	1
6193100	20 L 9/32AF	9/32	50	11.0	12.0	6.0	20	1
6193290	20 L 5/16AF	5/16	50	12.0	12.0	7.5	25	1
6193370	20 L 11/32AF	11/32	50	13.0	13.0	7.5	30	1
6193450	20 L 3/8AF	3/8	50	14.0	14.0	9.0	35	1
6193530	20 L 7/16AF	7/16	50	16.0	16.0	10.5	50	1
6193610	20 L 1/2AF	1/2	50	18.0	18.0	12.0	65	1

D 20

SOCKET 1/4" UD profile

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated

6.3

1/4"



Code	No.	Ø mm	L	d ₁	d ₂	t	ISO	EN
1649558	D 20 4	4.0	24.7	6.9	12.0	2.0	15	1
1649566	D 20 4,5	4.5	24.7	7.5	12.0	2.3	15	1
1649574	D 20 5	5.0	24.7	8.2	12.0	2.5	10	1
1802402	D 20 5,5	5.5	24.7	8.8	12.0	3.0	12	1
1649582	D 20 6	6.0	24.7	9.4	12.0	3.5	11	1
1649590	D 20 7	7.0	24.7	11.0	12.0	4.0	11	1
6225750	D 20 8	8.0	24.7	12.0	12.0	5.0	15	5
6225830	D 20 9	9.0	24.7	13.0	13.0	5.0	15	1
6226050	D 20 10	10.0	24.7	14.7	14.7	6.0	20	5
6226130	D 20 11	11.0	24.7	16.0	16.0	7.0	25	1
6226480	D 20 12	12.0	24.7	17.0	17.0	8.0	25	1
6226640	D 20 13	13.0	24.7	18.5	18.5	8.0	30	5
6226720	D 20 14	14.0	24.7	19.7	19.7	10.0	40	1

Detailed information on products,
promotions and trade fairs

... www.gedore.com






Code	No.	AF	L	d ₁	d ₂	t		
1812505	D 20 3/16AF	3/16	24.7	7.8	12.0	2.5	11	1
1812513	D 20 7/32AF	7/32	24.7	8.8	12.0	3.0	12	1
1812521	D 20 1/4AF	1/4	24.7	9.8	12.0	3.5	13	1
1812548	D 20 9/32AF	9/32	24.7	11.0	12.0	4.0	14	1
6226800	D 20 5/16AF	5/16	24.7	12.0	12.0	5.0	15	1
6226990	D 20 11/32AF	11/32	24.7	13.0	13.0	5.0	15	1
6227020	D 20 3/8AF	3/8	24.7	14.0	14.0	6.0	15	1
1901702	D 20 13/32AF	13/32	24.7	15.0	15.0	6.0	20	1
6227370	D 20 7/16AF	7/16	24.7	16.0	16.0	7.0	25	1
6227450	D 20 1/2AF	1/2	24.7	18.0	18.0	8.0	30	1
6228180	D 20 9/16AF	9/16	24.7	20.0	20.0	10.0	40	1

TX 20

SOCKET 1/4" for protruding TORX® head screws

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA


6.3
1/4"


Code	No.	AF	M	mm	L	d ₁	d ₂	t		
6193880	TX 20 E4	E4	M3	3.86	25	5.5	11	4.5	10	5
6187640	TX 20 E5	E5	M4	4.75	25	7.0	11	5.0	10	5
6187720	TX 20 E6	E6	M5	5.74	25	8.0	11	5.0	10	5
6187800	TX 20 E7	E7	M6	6.22	25	9.5	11	6.0	10	5
6187990	TX 20 E8	E8	M6 - M7	7.52	25	10.5	12	6.5	15	5
6193960	TX 20 E10	E10	M8	9.42	25	13.0	13	7.0	15	5

ITX 20

SCREWDRIVER BIT SOCKET 1/4" for recessed TORX® head screws

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, with pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

6.3
1/4"



Code	No.	AF	M	mm	L ₁	L ₂	d			
6190430	ITX 20 T8	T8	M2,5	2.31	30.5	14.5	12	10	10	
6190510	ITX 20 T9	T9	M3	2.50	30.5	14.5	12	10	10	
6190780	ITX 20 T10	T10	M3 - M3,5	2.74	30.5	14.5	12	10	10	
6190860	ITX 20 T15	T15	M3,5 - M4	3.27	30.5	14.5	12	10	10	
6190940	ITX 20 T20	T20	M4 - M5	3.86	30.5	14.5	12	10	10	
6191080	ITX 20 T25	T25	M4,5 - M5	4.43	30.5	14.5	12	10	10	
6191160	ITX 20 T27	T27	M4,5 - M6	4.99	30.5	14.5	12	10	10	
6191240	ITX 20 T30	T30	M6 - M7	5.52	30.5	14.5	12	15	10	
6265890	ITX 20 T40	T40	M7 - M8	6.65	33.5	14.0	14	20	10	



ITX 20 IP

SCREWDRIVER BIT SOCKET 1/4" for recessed TORX® head screws

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, with pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA


6.3
1/4"


Code	No.	AF	M	mm	L ₁	L ₂	d			
1815431	ITX 20 6IP	6IP	M2	2.31	30.5	14.5	12	13	1	
1815458	ITX 20 8IP	8IP	M2,5 - M3	2.50	30.5	14.5	12	13	1	
1815466	ITX 20 10IP	10IP	M3 - M3,5	2.74	30.5	14.5	12	13	1	
1815474	ITX 20 15IP	15IP	M3,5 - M4	3.27	30.5	14.5	12	13	1	
1815482	ITX 20 20IP	20IP	M4 - M5	3.86	30.5	14.5	12	14	1	
1815490	ITX 20 25IP	25IP	M4,5 - M5	4.43	30.5	14.5	12	14	1	
1827898	ITX 20 27IP	27IP	M5 - M6	4.99	30.5	14.5	12	14	1	
1815504	ITX 20 30IP	30IP	M6	5.52	30.5	14.5	12	15	1	
1815512	ITX 20 40IP	40IP	M7 - M8	6.65	33.5	14.0	14	25	1	

ITX 20 K

SCREWDRIVER BIT SOCKET 1/4" with ball end for recessed TORX® head screws

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, with pressed-in pin, gun-metal finish
- Swivel angle approx. 15°-20°
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

6.3
1/4"


Code	No.	AF	M	mm	L ₁	L ₂	d			
6120220	ITX 20 K T10	T10	M3 - M3,5	2.74	30.5	14.5	12	20	1	
6120300	ITX 20 K T15	T15	M3,5 - M4	3.27	30.5	14.5	12	20	1	
6120490	ITX 20 K T20	T20	M4 - M5	3.86	30.5	14.5	12	20	1	
6120570	ITX 20 K T25	T25	M4,5 - M5	4.43	30.5	14.5	12	20	1	
6120650	ITX 20 K T27	T27	M4,5 - M6	4.99	30.5	14.5	12	20	1	
6120730	ITX 20 K T30	T30	M6 - M7	5.52	30.5	14.5	12	20	1	
6120810	ITX 20 K T40	T40	M7 - M8	6.65	33.5	14.0	14	20	1	

IS 20

SCREWDRIVER BIT SOCKET 1/4" for slotted head screws

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- Bit as per DIN DIN ISO 2380-1, Form B, manganese-phosphated

6.3
1/4"


Code	No.	mm	mm	L ₁	L ₂	d			
6171560	IS 20 4x0,8	0.8	4.0	28	14.5	12	20	10	
6171640	IS 20 5,5x1	1.0	5.5	28	14.5	12	20	10	
6174230	IS 20 6,5x1,2	1.2	6.5	28	14.5	12	20	10	
6174310	IS 20 8x1,6	1.6	8.0	28	14.5	12	20	10	


IKS 20

SCREWDRIVER BIT SOCKET 1/4" for cross-slotted head screws PH

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- Bit as per DIN ISO 8764-1 PH, manganese-phosphated

6.3

1/4"



Code	No.	PH	L ₁	L ₂	d	±	±
6174580	IKS 20 1	1	28	15	12	20	10
6174660	IKS 20 2	2	28	15	12	20	10
6174740	IKS 20 3	3	28	15	12	20	10
6174820	IKS 20 4	4	28	15	12	20	10


IKS 20 PZD

SCREWDRIVER BIT SOCKET 1/4" for cross-slotted head screws PZ

- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- Bit as per DIN ISO 8764-1 PZ, manganese-phosphated

6.3

1/4"



Code	No.	PZ	L ₁	L ₂	d	±	±
6187130	IKS 20 PZD 1	1	28	15	12	10	10
6187210	IKS 20 PZD 2	2	28	15	12	15	10
6187480	IKS 20 PZD 3	3	28	15	12	15	10
6187560	IKS 20 PZD 4	4	28	15	12	20	10


IN 20

SCREWDRIVER BIT SOCKET 1/4" for in-hex screws

- Acc. to DIN 7422
- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated, bit, manganese-phosphated
- not standardised

6.3

1/4"



Code	No.	*	mm	L ₁	L ₂	d	±	±
1812556	IN 20 2	*	2.0	28	4.5	12	12	1
1707736	IN 20 2,5	*	2.5	28	5.0	12	13	1
6176010	IN 20 3		3.0	28	5.5	12	20	10
6176280	IN 20 4		4.0	28	7.0	12	20	10
6176360	IN 20 5		5.0	28	8.0	12	20	10
6178490	IN 20 6		6.0	28	8.5	12	25	10
6178570	IN 20 8	*	8.0	28	10.0	12	25	10




IN 20 L

SCREWDRIVER BIT SOCKET 1/4" long, for in-hex screws

- Acc. to DIN 7422
- Square drive as per DIN 3120 - C 6.3, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated, bit manganese-phosphated

6.3

1/4"



Code	No.	mm	L ₁	L ₂	d	±	±
1933256	IN 20 L 3-60	3	60	32	12	24	1
1933264	IN 20 L 4-60	4	60	32	12	25	1
1933272	IN 20 L 5-60	5	60	32	12	27	1
1933280	IN 20 L 6-60	6	60	32	12	29	1
1933299	IN 20 L 8-60	8	60	32	14	50	1

RATCHETS 6.3 (1/4")


2093 U-20

REVERSIBLE RATCHET 1/4"

- Acc. to DIN 3122, ISO 3315
- Fine-toothed, with lever change and push-button release
- Non-slip 2-component handle with hanging hole
- For hand-operated sockets and accessories with square drive as per DIN 3120 C 6.3, ISO 1174, ball locking device

6.3

1/4"



Code	No.	1/4"	6.3	°	mm	±	±
1703749	2093 U-20	1/4	6.3	9	127	20	91




2093 U-10

REVERSIBLE RATCHET 1/4"

- Acc. to DIN 3122, ISO 3315
- With lever change, locks in middle position
- For hand-operated sockets and accessories with square drive as per DIN 3120 C 6.3, ISO 1174, ball locking device

6.3

1/4"



Code	No.	1/4"	6.3	°	mm	±	±
6180470	2093 U-10	1/4	6.3	15	129	22.2	105




2093 U-3

REVERSIBLE RATCHET 1/4"

- Acc. to DIN 3122, ISO 3315
- With non-slip metal disc change, fine-toothed and robust
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
6170590	2093 U-3	1/4	6.3	5	129	25	65	5		




2093 Z-94

RATCHET HANDLE WITH COUPLER 1/4"

- Acc. to DIN 3122, ISO 3315
- With square coupler, medium-fine toothed, extremely rugged
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device

6.3
1/4"




Code	No.	□"	■	□	□"	□	□"	□	□"	□
6170750	2093 Z-94	1/4	6.3	18	129	12	65	5		

2093 U-3 T

RATCHET WITH T-HANDLE 1/4"

- With metal reversing disc and fine-toothed ratchet wheel
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
1791532	2093 U-3 T	1/4	6.3	5	140	56	1			

2093 HR-94

HAND RATCHET 1/4" without handle

- With square coupler
- Facilitates working quickly in confined spaces where other ratchets or tools do not fit
- Especially suitable for servicing work in conjunction with extension 2090-12
- Dimensions: Ø 26 x 20 mm

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
6069870	2093 HR-94	1/4	6.3	18	28	1				

ACCESSORIES 6.3 (1/4")

2030

CONVERTOR 1/4" TO 3/8"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"
10
3/8"



Code	No.	□"	□	□"	□	□"	□	□"	□	□"
6170080	2030	1/4	6.3	3/8	10	26	15	10		

2087

SLIDING T BAR 1/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
6170160	2087	1/4	6.3	115	40	5				

2087 A

SLIDING T BAR WITH RELEASE 1/4"

- Secured against unintentional removal
- Turn handle for easy locking and releasing
- Accidental release when working is prevented because of the asymmetrical release point
- Particularly useful for work in sensitive areas where certainty against loss is a theme
- Examples: Aircraft engine, work in deep machine bodies
- DBGM

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
1834398	2087 A	1/4	6.3	115	38	1				

2088

FLEXIBLE EXTENSION 1/4"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
6170240	2088	1/4	6.3	120	45	10				

2090

EXTENSION 1/4"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device
- * not standardised

6.3
1/4"



Code	No.	□"	■	□	□"	□	□"	□	□"	□
6170320	2090-2	1/4	6.3	55	25	10				
6170400	2090-4	1/4	6.3	97	45	10				
6171210	2090-6	1/4	6.3	148	50	10				
6173340	2090-12	*	1/4	6.3	305	120	1			

2090 A

EXTENSION 1/4" with release

- Easy access to deep-fitting screws in confined areas
- No unintentional release of the socket from the extension due to safety ring
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"


Code	No.	□"	■	□	□	□	□
1932284	2090 A-2	1/4	6.3	55	30	1	
1932292	2090 A-4	1/4	6.3	97	50	1	
1932306	2090 A-12	1/4	6.3	305	125	1	

2090 KR

UNIVERSAL EXTENSION 1/4"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device
- The extension is able to pivot up to 15°

6.3
1/4"


Code	No.	□"	■	□	□	□	□
1812564	2090 KR-2	1/4	6.3	55	25	1	
1812572	2090 KR-4	1/4	6.3	97	45	1	
6121030	2090 KR-6	1/4	6.3	148	60	1	



2094

COUPLER 1/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"


Code	No.	□"	■	□	□	□	□
6170830	2094	1/4	6.3	19.8	5	10	

2095

UNIVERSAL JOINT 1/4"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"


Code	No.	□"	■	□	□	□	□
6170910	2095	1/4	6.3	1/4	6.3	38	20

2097

SWIVEL HANDLE 1/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"


Code	No.	□"	■	□	□	□	□
6171050	2097	1/4	6.3	146	75	1	

2098

DRIVING HANDLE 1/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"


Code	No.	□"	■	□	□	□	□
6171480	2098	1/4	6.3	140	70	10	

2098 K

DRIVING HANDLE 1/4" short pattern

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

6.3
1/4"


Code	No.	□"	■	□	□	□	□
1953788	2098 K	1/4	6.3	70	34	1	

2098 T

DRIVING HANDLE 1/4"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device
- With bit adaptor no. 620 also suitable for 1/4" bits
- Easy access to deep-fitting screws in confined areas
- With hanging hole


6.3
1/4"


Code	No.	□"	■	□	□	□	□
1939998	2098 T	1/4	6.3	300	150	1	

2099

TELESCOPIC EXTENSION 1/4" magnetic

- With 1/4" female square drive and 1/4" female hexagon drive
- Automatic, form-fit connection
- Adjustable in 10 mm steps from 186-296 mm
- Suitable for 1/4" bits as well as with adaptor no. 673 for sockets up to 13 mm
- Made of quality steel, manganese-phosphated resp. chrome-plated

6.3
1/4"
6.3
1/4"


Code	No.	□"	■	□	□	□	□
1888455	2099	1/4	6.3	1/4	6.3	186-296	205

Detailed information on products, promotions and trade fairs

... www.gedore.com





SL 2013

TOOL HOLDING RAIL, MAGNETIC 1/4" empty

- External squares to take 13 standard commercial 6.3 mm (1/4") sockets
- Two female square adaptors to take ratchets, sliding T bars, extensions etc.
- A strong magnet securely holds the socket rail to ferrous metals
- Additional holes are provided for wall mounting the socket rail or attaching to non-ferrous materials
- The sockets are securely locked by the ball at the square-drive end by turning them 90°
- It is a simple matter to "unlock" and remove the sockets, by turning them 90° in the opposing direction
- Delivery without tools

6.3

1/4"

6.3

1/4"



Code	No.	mm	mm	mm	mm
1761080	SL 2013	380	33	350	1

S 2032-05

ADAPTOR SET 1/4" 5 pieces

- Set of reducers and converters 1/4" - 3/4"
- Reducers 1930, 3020
- Convertors 2030, 3019, 1932
- In transparent plastic box L 134 x W 51 x H 51 mm
- Please take note of the maximum capacity of the external squares of the reducers acc. to DIN 3123, ISO 3316

6.3

1/4"

10

3/8"

12.5

1/2"

20

3/4"



2030



3020



3019



1930



1932

Code	No.	Contents	mm	mm
1729071	S 2032-05	2030 3020 3019 1930 1932	335	1



SETS 6.3 (1/4")

6.3 1/4"

- New classification into basic, supplementary, compact and volume sets
- Socket drivers and/or practical accessories in proven GEDORE quality
- With "Check-Tool-System": 2-colour plastic insert to check that the set is complete

BASIC SETS



1/4"

D 20 DM

SOCKET SET 1/4" 14 pieces

- In plastic case
- Dimensions: 160 x 95 x 38 mm

6.3

1/4"

1/4"



Code	No.	mm	mm
1815563	D 20 DM D 20 4 4,5 5 5,5 6 7 8 9 10 11 12 13 673 6,3 676	346	1

D 20 DMU-3

SOCKET SET 1/4" 14 pieces

- In plastic case
- Dimensions: 160 x 95 x 38 mm

6.3

1/4"

1/4"



Code	No.	mm	mm
1815598	D 20 DMU-3 U-3 2093 U-3 D 20 4 4,5 5 5,5 6 7 8 9 10 11 12 13 2090-4	415	1

D 20 DMU-3 T

SOCKET SET 1/4" 13 pieces

- In plastic case
- Dimensions: 160 x 95 x 38 mm

6.3

1/4"

1/4"



Code	No.	mm	mm
1815571	D 20 DMU-3 T U-3 2093 U-3 T 2093 HR-94 D 20 4 5 6 7 8 9 10 11 12 13 2090 KR-4	401	1



D 20 TMU-10

SOCKET SET 1/4" 40 pieces

- ✓ In plastic case
- ✓ Dimensions: 200 x 120 x 38 mm
- ✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



6,3

1/4"



6,3

1/4"



+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+


+

Code	No.	720	1
1815660	D 20 TMU-10 U-10 2093 U-10 D 20 4 5 6 7 8 9 10 11 12 13 680 4 6,5 685 3 4 5 6 8 685 X 5 6 8 687 TX T10 T15 T20 T25 T27 T30 T40 690 1 2 690 PZD 1 2 3 620 639 673 6,3 676 699 2095 2090-4		

20 XLU-3 T

SOCKET SET 1/4" 37 pieces

- ✓ With telescopic extension no. 2099, for universal work
- ✓ In plastic case
- ✓ Dimensions: 200 x 120 x 38 mm
- ✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

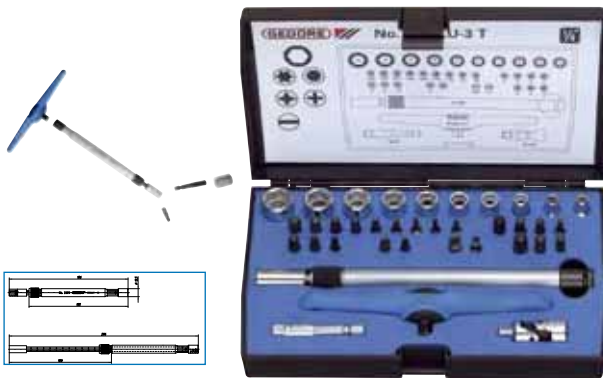

6,3

1/4"



+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

Code	No.	800	1
1888447	20 XLU-3 T U-3 T 2093 U-3 T 20 4 5 6 7 8 9 10 11 12 13 680 4 6,5 685 3 4 5 6 685 X 5 6 8 687 TX T8 T9 T10 T15 T20 T25 T27 T30 T40 690 1 2 690 PZD 1 2 3 673 6,3 2099 2095		



Deviant packing units see article description.

VOLUME SETS

D 20 FMU-20

SET FOR PRECISION MECHANICS 1/4" + 4 MM 52 pieces

- ✓ Practical tool set for precision mechanical work
- ✓ Includes practical pickup tool for bits, no. 635, for easy replacement of the bits in the socket
- ✓ Two ratchets for different applications:
 - ✓ Fine-toothed reversible lever ratchet no. 2093 U-20 for high-torque bit ratchet no. 471, combined with socket holder no. 673, allows the use of sockets in extremely confined spaces
- ✓ With GEDORE Check-Tool system: missing tool check using two colour plastic inserts



4

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

Code	No.	810	1	U
2000237	D 20 FMU-20 471 U-20 2093 U-20 480 0,8 1,2 1,5 1,8 485 0,7 0,9 1,3 1,5 490 PH 000 00 0 490 PZD 000 00 0 487 TX T3 T4 T5 T6 T7 T8 D 20 4 4,5 5 5,5 6 7 8 685 2 2,5 3 4 5 687 TX T9 T10 T15 T20 T25 690 1 2 690 PZD 1 2 6 4x4,5 5x5,5 7x8 420 499 620 2090 KR-4 673 K 635			

D 20 WMU-3

SOCKET SET 1/4" 29 pieces

- ✓ In plastic case
- ✓ Dimensions: 275 x 150 x 42 mm



6,3

1/4"



Code	No.	906	1
1815679	D 20 WMU-3 U-3 2093 U-3 D 20 4 4,5 5 5,5 6 7 8 9 10 11 12 13 8 4 5 5,5 6 7 8 9 10 11 13 639 673 6,3 676 2095 2090-2 -4		

20 LMU-10

SOCKET SET 1/4" 49 pieces

- With short and long sockets
- In plastic case
- Dimensions: 275 x 150 x 42 mm
- TORX® = trademark of Acument Intellectual Properties, LLC. USA

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"



Code	No.		
1815687	20 LMU-10	1175	1
	- U-10 2093 U-10 - D 20 4 5 6 7 8 9 10 11 12 13 20 L 4,5 5 6 7 8 9 10 12 13 680 4 6,5 685 3 4 5 6 8 685 X 5 6 8 687 TX T10 T15 T20 T25 T27 T30 T40 690 1 2 690 PZD 1 2 3 620 676 699 2090-2 -6 2095		

20 IMU-3

SOCKET SET 1/4" 32 pieces

- In plastic case
- Dimensions: 275 x 150 x 42 mm

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"



Code	No.		
6174150	20 IMU-3	1300	1
	- U-3 2093 U-3 20 4 5 6 7 8 9 10 11 12 13 14 - IS 20 4 5,5 6,5 8 IN 20 3 4 5 6 8 - IKS 20 1 2 3 IKS 20 PZD 1 2 3 2087 2090-2 -6 2095 2098		



STANDARD SETS

20 E

SOCKET SET 1/4" 16 pieces / 14 pieces

- In plastic case
- Dimensions: 200 x 120 x 38 mm

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"



Code	No.		
6172100	20 EMZ	710	1
	- Z-94 2093 Z-94 20 4 4,5 5 5,5 6 7 8 9 10 11 13 2087 2090-4 2095 2098		
6172290	20 EMU-3	710	1
	- U-3 2093 U-3 20 4 4,5 5 5,5 6 7 8 9 10 11 13 2087 2090-4 2095 2098		
6162220	20 EMU-10	770	1
	- U-10 2093 U-10 20 4 4,5 5 5,5 6 7 8 9 10 11 13 2087 2090-4 2095 2098		
6172450	20 EAU-3	700	1
	- U-3 2093 U-3 20 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2" 2087 2090-4 2095 2098		

20 ITU-3

SOCKET SET 1/4" 36 pieces

- In plastic case
- Dimensions: 275 x 150 x 42 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"

6.3

1/4"



Code	No.		
6196710	20 ITU-3	1300	1
	- U-3 2093 U-3 20 4 5 6 7 8 9 10 11 12 13 14 - IN 20 3 4 5 6 8 - TX 20 E4 E5 E6 E7 E8 E10 - ITX 20 T8 T9 T10 T15 T20 T25 T27 T30 2087 2090-2 -6 2095 2098		



DISPLAY BOXES

VB 20

DISPLAY BOX 1/4"

- For small sockets and bits
- Plastic box with removable dividers and labels for each article
- Dimensions: 330 x 250 x 55 mm

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"



1/4"



VS 20

DISPLAY BOX 1/4" 187 pieces

- VS 20-20 L-I20 consisting of: set **S20-I20** and 5 pcs each of **20 L 6 7 8 9 10 13**
- In sheet metal rack
- Dimensions: 600 x 230 x 270 mm

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"

6,3

1/4"



Detailed information on products, promotions and trade fairs

... www.gedore.com



10 (3/8") SQUARE DRIVE

10 3/8" 10 3/8"

SOCKETS 10 (3/8")



3/8"

30


SOCKET 3/8" hexagon

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retention groove
- Hand-operated, polished, chrome-plated
- * not standardised

10

3/8"

○



Code	No.	*	Ø mm	L	d ₁	d ₂	t	±	±
6230160	30 6	*	6	28	9.7	17.5	5.0	20	10
6230240	30 7		7	28	11.0	17.5	5.0	22	10
6230320	30 8		8	28	12.1	17.5	9.0	24	10
6230400	30 9		9	28	13.5	17.5	9.0	26	10
6230590	30 10		10	28	14.7	17.5	9.0	30	10
6233850	30 11		11	28	16.0	17.5	9.0	30	10
6233930	30 12		12	28	17.2	18.3	9.0	32	10
6234070	30 13		13	28	18.5	17.5	9.0	35	10
6234150	30 14		14	29	19.7	18.4	11.0	40	10
6234230	30 15		15	30	21.0	19.7	12.5	42	10
6234310	30 16		16	30	22.2	21.0	12.5	48	10
6234580	30 17		17	30	23.5	22.3	12.5	55	10
6234660	30 18		18	30	24.7	23.0	12.5	60	10
6234740	30 19		19	30	26.0	23.7	12.5	70	10
6234820	30 20		20	31	27.2	24.5	12.5	75	5
6234900	30 21		21	31	28.5	25.8	13.5	82	5
6235040	30 22		22	32	29.7	26.3	14.5	85	5

Code	No.	Ø AF	L	d ₁	d ₂	t	±	±
6232100	30 1/4AF	1/4	28	10.1	17.5	5.0	20	1
6232290	30 9/32AF	9/32	28	11.1	17.5	5.0	22	1
6232370	30 5/16AF	5/16	28	12.1	17.5	9.0	24	1
6232450	30 11/32AF	11/32	28	13.1	17.5	9.0	26	1
6232530	30 3/8AF	3/8	28	14.1	17.5	9.0	26	1

D 30


SOCKET 3/8" UD profile

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- * not standardised

10

3/8"

○



Code	No.	*	Ø mm	L	d ₁	d ₂	t	±	±
1845705	D 30 6	*	6	28	9.7	17.5	5.0	20	10
1845713	D 30 7		7	28	11.0	17.5	5.0	22	10
1845721	D 30 8		8	28	12.1	17.5	9.0	24	10
1845748	D 30 9		9	28	13.5	17.5	9.0	26	10
6229230	D 30 10		10	28	14.7	17.5	9.0	30	10
6230670	D 30 11		11	28	16.0	17.5	9.0	30	5
6230750	D 30 12		12	28	17.2	18.3	9.0	32	5

Code	No.	*	Ø mm	L	d ₁	d ₂	t	±	±
6230830	D 30 13		13	28	18.5	17.5	9.0	35	10
6230910	D 30 14		14	29	19.7	18.4	11.0	40	5
6231050	D 30 15		15	30	21.0	19.7	12.5	42	5
6231130	D 30 16		16	30	22.2	21.0	12.5	48	5
6231210	D 30 17		17	30	23.5	22.3	12.5	55	10
6231480	D 30 18		18	30	24.7	23.0	12.5	60	5
6231560	D 30 19		19	30	26.0	23.7	12.5	70	10
6231640	D 30 20		20	31	27.2	24.5	12.5	75	5
6231720	D 30 21		21	31	28.5	25.8	13.5	82	5
6231800	D 30 22		22	32	29.7	26.3	14.5	85	5

Code	No.	Ø AF	L	d ₁	d ₂	t	±	±
2016613	D 30 1/4AF	1/4	28	10.1	17.5	5.0	20	1
1997122	D 30 5/16AF	5/16	28	12.1	17.5	5.0	20	1
1997130	D 30 3/8AF	3/8	28	14.1	17.5	9.0	10	1
1997149	D 30 13/32AF	13/32	28	15.0	17.5	9.0	20	1
6232610	D 30 7/16AF	7/16	28	16.1	17.5	9.0	30	1
6232880	D 30 1/2AF	1/2	28	18.1	19.2	9.0	35	1
6232960	D 30 9/16AF	9/16	29	20.1	18.7	11.0	40	1
6233180	D 30 19/32AF	19/32	30	21.0	19.7	12.5	42	1
6233260	D 30 5/8AF	5/8	30	22.1	20.7	12.5	48	1
6233340	D 30 11/16AF	11/16	30	24.0	22.7	12.5	55	1
6233420	D 30 3/4AF	3/4	30	26.0	23.7	12.5	70	1
1997157	D 30 25/32AF	25/32	31	27.0	24.3	12.5	75	1
1997165	D 30 13/16AF	13/16	31	28.0	25.3	12.5	80	1
6232020	D 30 7/8AF	7/8	32	30.0	26.5	14.5	100	1
1997173	D 30 15/16AF	15/16	33	31.9	28.0	15.5	110	1
1983296	D 30 1AF	1	33	33.9	30.0	15.5	120	1

D 30 L


SOCKET 3/8" long, UD profile

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated

10

3/8"

○



Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6258330	D 30 L 10	10	63.5	14.7	17.5	11	50	10
6258410	D 30 L 11	11	63.5	16.0	17.5	12	60	5
6258680	D 30 L 12	12	63.5	17.2	17.5	14	65	5
6258760	D 30 L 13	13	63.5	18.5	19.0	14	70	10
6258840	D 30 L 14	14	63.5	19.7	19.5	17	85	5
6258920	D 30 L 15	15	63.5	21.0	20.5	17	85	5
6259060	D 30 L 16	16	63.5	22.2	22.0	17	95	5
6259140	D 30 L 17	17	63.5	23.5	20.5	17	105	5
6259220	D 30 L 18	18	63.5	24.7	21.5	20	110	5
6259300	D 30 L 19	19	63.5	26.0	22.0	20	120	5
6259490	D 30 L 20	20	63.5	27.2	23.5	20	135	1
6259570	D 30 L 21	21	63.5	28.5	23.5	20	145	1
6259650	D 30 L 22	22	63.5	29.7	23.5	23	160	1

Code	No.	Ø AF	L	d ₁	d ₂	t	±	±
6259730	D 30 L 3/8AF	3/8	63.5	14.1	17.5	11	50	1
6259810	D 30 L 7/16AF	7/16	63.5	16.1	17.5	12	60	1
6260070	D 30 L 1/2AF	1/2	63.5	18.1	19.0	14	70	1
6260150	D 30 L 9/16AF	9/16	63.5	20.1	19.5	17	85	1
6260230	D 30 L 5/8AF	5/8	63.5	22.1	22.0	17	95	1
6260310	D 30 L 11/16AF	11/16	63.5	24.0	20.5	17	105	1
6260580	D 30 L 3/4AF	3/4	63.5	26.0	22.0	20	135	1
6260660	D 30 L 13/16AF	13/16	63.5	28.3	23.5	20	145	1
6260740	D 30 L 7/8AF	7/8	63.5	30.0	23.5	23	160	1




DG 30

SWIVEL HEAD SOCKET 3/8" UD profile

- Hand-operated, square drive, chrome-plated

10

3/8"



Code	No.	Ø mm	L	d ₁	d ₂	t	↺↻	⊞
6240630	DG 30 10	10	41.5	14.7	19.0	8.0	55	1
6240710	DG 30 11	11	41.5	16.0	19.0	8.0	55	1
6240980	DG 30 12	12	42.5	17.2	19.0	9.0	60	1
6241520	DG 30 13	13	42.5	18.5	19.0	9.0	60	1
6241600	DG 30 14	14	43.5	19.7	19.0	10.0	60	1
6241790	DG 30 15	15	45.5	21.0	19.0	11.0	65	1
6241870	DG 30 16	16	45.5	22.2	19.0	11.0	70	1
6241950	DG 30 17	17	46.0	23.5	19.0	12.0	70	1
6242410	DG 30 18	18	46.0	24.7	19.0	12.5	75	1
6242680	DG 30 19	19	46.5	26.0	19.0	12.5	75	1


TX 30

SOCKET 3/8" for protruding TORX® head screws

- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

10

3/8"



Code	No.	Ø	⊞	★ mm	L	d ₁	d ₂	t	↺↻	⊞
6250270	TX 30 E5	E5	M4	4.75	28	7.2	17.5	5.0	25	5
6250350	TX 30 E6	E6	M5	5.74	28	8.5	17.5	5.0	25	5
6250430	TX 30 E7	E7	M6	6.22	28	9.5	17.5	5.5	25	5
6250510	TX 30 E8	E8	M6 - M7	7.52	28	10.8	17.5	6.0	25	5
6250780	TX 30 E10	E10	M8	9.42	28	13.2	17.5	9.0	30	5
6250860	TX 30 E11	E11	-	10.08	28	13.8	17.5	9.0	30	5
6250940	TX 30 E12	E12	M10	11.17	28	15.2	17.5	9.0	30	5
6251080	TX 30 E14	E14	M12	12.90	28	16.8	18.3	9.0	35	5


ITX 30

SCREWDRIVER BIT SOCKET 3/8" for recessed TORX® head screws

- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, with pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

10

3/8"



Code	No.	⊞	⊞	★ mm	L ₁	L ₂	d	↺↻	⊞
6246320	ITX 30 T20	T20	M4 - M5	3.86	49	17	17.5	45	5
6246830	ITX 30 T25	T25	M4,5 - M5	4.43	49	17	17.5	45	5
6247210	ITX 30 T27	T27	M4,5 - M6	4.99	49	17	17.5	45	5
6247560	ITX 30 T30	T30	M6 - M7	5.52	49	17	17.5	45	5
6247720	ITX 30 T40	T40	M7 - M8	6.65	49	17	17.5	45	5
6247800	ITX 30 T45	T45	M8 - M10	7.82	49	17	17.5	50	5
6247990	ITX 30 T50	T50	M10	8.83	49	17	19.0	70	5

ITX 30 L

SCREWDRIVER BIT SOCKET 3/8" long, for recessed TORX® head screws

- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, with pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

10

3/8"



Code	No.	⊞	⊞	★ mm	L ₁	L ₂	d	↺↻	⊞
1394177	ITX 30 L T20	T20	M4 - M5	3.86	94	62	17.5	45	5
1394185	ITX 30 L T25	T25	M4,5 - M5	4.43	94	62	17.5	45	5
1394193	ITX 30 L T27	T27	M4,5 - M6	4.99	94	62	17.5	45	5
1394207	ITX 30 L T30	T30	M6 - M7	5.52	94	62	17.5	45	5
1394215	ITX 30 L T40	T40	M7 - M8	6.65	94	62	17.5	45	5
1394223	ITX 30 L T45	T45	M8 - M10	7.82	94	62	17.5	50	5
1394231	ITX 30 L T50	T50	M10	8.83	94	62	19.0	70	5



ITX 30 B

SCREWDRIVER BIT SOCKET 3/8" for recessed TORX® head screws with pilot

- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, with pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

10

3/8"



Code	No.	⊞	⊞	★ mm	L ₁	L ₂	d	Bore	↺↻	⊞
1440969	ITX 30 B T20	T20	M4 - M5	3.86	49	17	17.5	1,55 x 1,86	47	5
1440977	ITX 30 B T25	T25	M4,5 - M5	4.43	49	17	17.5	1,93 x 2,04	47	5
1440985	ITX 30 B T27	T27	M4,5 - M6	4.99	49	17	17.5	2,18 x 2,29	46	5
1440993	ITX 30 B T30	T30	M6 - M7	5.52	49	17	17.5	2,56 x 2,92	84	5
1429701	ITX 30 B T40	T40	M7 - M8	6.65	49	17	19.0	2,92 x 3,28	64	5
1441000	ITX 30 B T45	T45	M8 - M10	7.82	49	17	19.0	3,45 x 3,68	65	5
1441019	ITX 30 B T50	T50	M10	8.83	49	17	20.5	3,83 x 3,78	77	5


IS 30

SCREWDRIVER BIT SOCKET 3/8" for slotted head screws

- ✓ Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, blade as per DIN ISO 2380-1, Form B, manganese-phosphated

10

3/8



Code	No.	mm	mm	L ₁	L ₂	d	mm	mm
6666100	IS 30 5,5x1	1.0	5.5	55	27	17.5	45	5
1640895	IS 30 6,5x1,2	1.2	6.5	55	27	17.5	45	1
6666290	IS 30 8x1,2	1.2	8.0	55	23	17.5	50	5
6666370	IS 30 10x1,6	1.6	10.0	55	23	19.0	55	5
1640909	IS 30 12x2	2.0	12.0	55	23	20.5	80	1


IKS 30

SCREWDRIVER BIT SOCKET 3/8" for cross-slotted head screws PH

- ✓ Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, tip as per DIN ISO 8764-1 PH, gun-metal finish

10

3/8



Code	No.	PH	L ₁	L ₂	d	mm	mm
6666610	IKS 30 1	1	55	27	17.5	35	5
6666880	IKS 30 2	2	55	23	17.5	45	5
6666960	IKS 30 3	3	55	23	19.0	50	5




IKS 30 PZD

SCREWDRIVER BIT SOCKET 3/8" for cross-slotted head screws PZ

- ✓ Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, tip as per DIN ISO 8764-1 PZ, gun-metal finish

10

3/8



Code	No.	PZ	L ₁	L ₂	d	mm	mm
1640968	IKS 30 PZD 1	1	55	27	17.5	40	1
1640976	IKS 30 PZD 2	2	55	23	17.5	50	1
1640984	IKS 30 PZD 3	3	55	23	19.0	55	1


IN 30

SCREWDRIVER BIT SOCKET 3/8" for in-hex screws

- ✓ Acc. to DIN 7422
- ✓ Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, bit manganese-phosphated
- ✓ * not standardised

10

3/8



Code	No.	*	mm	L ₁	L ₂	d	mm	mm
6241010	IN 30 4		4	47	19	17.5	43	10
6241280	IN 30 5		5	47	19	17.5	44	10
6241360	IN 30 6		6	47	19	17.5	45	10
1643037	IN 30 7	*	7	47	19	17.5	46	1
6241440	IN 30 8		8	49	17	17.5	47	10
6242920	IN 30 10		10	49	17	19.0	60	10

Detailed information on products, promotions and trade fairs

... www.gedore.com




IN 30 L

SCREWDRIVER BIT SOCKET 3/8" long, for in-hex screws

- ✓ Acc. to DIN 7422
- ✓ Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, bit manganese-phosphated

10

3/8



Code	No.	mm	L ₁	L ₂	d	mm	mm
1510118	IN 30 L 4-95	4	95	67	17.5	44	10
1394347	IN 30 L 5-95	5	95	67	17.5	44	10
1394355	IN 30 L 6-95	6	95	67	17.5	44	10
1394363	IN 30 L 7-95	7	95	67	17.5	44	10
1394371	IN 30 L 8-95	8	95	63	17.5	44	10
1394398	IN 30 L 10-95	10	95	63	19.0	44	10


IN 30 LK

SCREWDRIVER BIT SOCKET 3/8" long, with ball end, for in-hex screws

- ✓ Total swivel angle approx. 15°-20°
- ✓ Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, bit gun-metal finished

10

3/8



Code	No.	mm	L ₁	L ₂	d	mm	mm
1505718	IN 30 LK 4	4	132	104	17.5	44	10
1505726	IN 30 LK 5	5	132	104	17.5	51	10
1505742	IN 30 LK 6	6	132	104	17.5	59	10
1505750	IN 30 LK 8	8	134	102	17.5	88	10
1505769	IN 30 LK 10	10	134	102	19.0	126	10



INX 30

SCREWDRIVER BIT SOCKET 3/8" for multi-point screws

- Acc. to DIN 2324
- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, tip as per DIN 2325, manganese-phosphated




Code	No.	□"	L ₁	L ₂	d	↺↻	⊞
6242170	INX 30 5	M 5	49	17	17.5	44	5
6242250	INX 30 6	M 6	49	17	17.5	45	5
6242330	INX 30 8	M 8	49	17	17.5	47	5

INX 30 L

SCREWDRIVER BIT SOCKET 3/8" long, for multi-point screws

- Acc. to DIN 2324
- Square drive as per DIN 3120 - C 10, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, tip as per DIN 2325, manganese-phosphated




Code	No.	□"	L ₁	L ₂	d	↺↻	⊞
1394312	INX 30 L 6	M 6	94	62	17.5	45	5
1394320	INX 30 L 8	M 8	94	62	17.5	47	5
1394339	INX 30 L 10	M 10	94	62	19.0	50	5

RATCHETS 10 (3/8")

3093 U-20

REVERSIBLE RATCHET 3/8"

- Acc. to DIN 3122, ISO 3315
- Fine-toothed, with lever change and push-button release
- Non-slip 2-component handle with hanging hole
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device



Code	No.							
1556800	3093 U-20	3/8	10	6	200	29.7	320	5

3093 U-10

REVERSIBLE RATCHET 3/8"

- Acc. to DIN 3122, ISO 3315
- With lever change, locks in middle position
- Push-button release
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device



Code	No.							
6236950	3093 U-10	3/8	10	11,25	200	30.2	250	5

3093 ALU-10

ALUMINIUM REVERSIBLE RATCHET 3/8"

- Design spec. similar to DIN 3122, ISO 3315
- Made from special-purpose drop-forged and hardened aluminium
- The mechanism as in all U-10 ratchets is made from high quality steel
- With lever change
- Push-button release
- Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device
- Extremely lightweight - just 158 g



Code	No.			°	mm			
1900005	3093 ALU-10	3/8	10	11,25		158	1	

3093 U-3

REVERSIBLE RATCHET 3/8"

- Acc. to DIN 3122, ISO 3315
- With non-slip metal disc change, fine-toothed and robust
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device



Code	No.							
6237090	3093 U-3	3/8	10	5	200	33.5	200	5

3093 GU-3

SWIVEL HEAD REVERSIBLE RATCHET 3/8"


- Swivels through 180°, with joint lock
- Fine-toothed, max. torque 200 N-m
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device



Code	No.	"		°	mm			
6237170	3093 GU-3	3/8	10	5	282	33.5	350	5

3093 Z-94
RATCHET HANDLE WITH COUPLER 3/8"


- Acc. to DIN 3122, ISO 3315
- With square coupler, medium-fine toothed, extremely rugged
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device

10
3/8"


Code	No.	■"	■	↗°	↔mm↔	↺↻	📦
6237680	3093 Z-94	3/8	10	10	200	18	220 5

3093 U-10 K
PLASTIC RATCHET 3/8"

- For fast and easy tightening of bolted connections up to max. 70 N·m
- Return angle 11.25°
- Made from sturdy compound material with a steel mechanism
- Dimensions 44 x 145 x 39 mm
- Available in five colours

10
3/8"


Code	No.	Colour	■"	■	↗°	↺↻	📦
6242090	3093 U-10 K SCHWARZ	signal-black	3/8	10	11,25	235	1
6244970	3093 U-10 K GRÜN	moss-green	3/8	10	11,25	235	1
6248100	3093 U-10 K GRAU	anthracite-grey	3/8	10	11,25	235	1
6248290	3093 U-10 K BLAU	sky-blue	3/8	10	11,25	235	1
1505394	3093 U-10 K SIGNALGRAU	signal-grey	3/8	10	11,25	247	1

3093 U-3 T
RATCHET WITH T-HANDLE 3/8"

- With metal reversing disc and fine-toothed ratchet wheel
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device

10
3/8"


Code	No.	■"	■	↗°	↔mm↔	↺↻	📦
1973320	3093 U-3 T	3/8	10	5	140	56	1

ACCESSORIES 10 (3/8")
3019
CONVERTOR 3/8" TO 1/2"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device
- Load capacity as per size 10 (3/8")

10
3/8"
12.5
1/2"


Code	No.	□"	□	■"	■	↔mm↔	↺↻	📦
6236010	3019	3/8	10	1/2	12.5	35	50	10

3020
REDUCER 3/8" TO 1/4"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device
- Load capacity as per size 6.3 (1/4")

10
3/8"
6.3
1/4"


Code	No.	□"	□	■"	■	↔mm↔	↺↻	📦
6236280	3020	3/8	10	1/4	6.3	28.5	40	10

3081
L-HANDLE 3/8"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	↔mm↔	↺↻	📦
6236360	3081	3/8	10	180	150	1

3084
SPEED BRACE 3/8"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	↔mm↔	↺↻	📦	🔧
6236440	3084	3/8	10	288	440	1	
1965395	3084 L	3/8	10	463	568	1	

3087
SLIDING T BAR 3/8"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	↔mm↔	↺↻	📦
6236520	3087	3/8	10	163	125	5



3087 A

SLIDING T BAR WITH RELEASE 3/8"

- Secured against unintentional removal
- Turn handle for easy locking and releasing
- An unintentional release during work is averted because of the asymmetrical detachment point
- Particularly useful for work in sensitive areas where certainty against loss is a theme
- Examples: Airplane engine, work in deep machine bodies
- DBGM

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
1871633	3087 A	3/8	10	163	135	1

3090

EXTENSION 3/8"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
1476637	3090-2	3/8	10	50	70	5
6236600	3090-3	3/8	10	76	70	5
6236790	3090-5	3/8	10	125	110	5
1476645	3090-7	3/8	10	180	70	5
6236870	3090-10	3/8	10	250	200	5
6238570	3090-12	3/8	10	305	260	5
1476653	3090-20	3/8	10	500	330	1

3090 A

EXTENSION 3/8" with release

- Easy access to deep-fitting screws in confined areas
- No unintentional release of the socket from the extension due to safety ring
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
1932314	3090 A-5	3/8	10	125	120	1
1932322	3090 A-10	3/8	10	250	210	1

3090 KR

UNIVERSAL EXTENSION 3/8"

- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device
- The extension is able to pivot up to 15°

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
1874381	3090 KR-3	3/8	10	76	80	1
1845756	3090 KR-5	3/8	10	125	108	1
1845764	3090 KR-10	3/8	10	250	197	1


3/8"

3094

COUPLER 3/8"

- Acc. to DIN 3122, ISO 3316
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
6237760	3094	3/8	10	28.8	10	10

3095

UNIVERSAL JOINT 3/8"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	□"	□	←mm→	↔	📦
6238140	3095	3/8	10	3/8	10	51	60	10

3096

SWIVEL HANDLE 3/8"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
6238220	3096	3/8	10	254	240	5

3098

SWIVEL HANDLE 3/8"

- For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 ball locking device

10
3/8"


Code	No.	■"	■	←mm→	↔	📦
6182410	3098	3/8	10	450	1000	1

SL 3014

TOOL HOLDING RAIL, MAGNETIC 3/8" empty

- External squares to take 14 standard commercial 10 mm (3/8") sockets
- Two female square adaptors to take ratchets, sliding T bars, extensions etc.
- A strong magnet securely holds the socket rail to ferrous metals
- Additional holes are provided for wall mounting the socket rail or attaching to non-ferrous materials
- The sockets are securely locked by the ball at the square-drive end by turning them 90°
- It is a simple matter to "unlock" and remove the sockets, by turning them 90° in the opposing direction
- Delivery without tools

10

3/8"

10

3/8"

U-DRIVE



Code	No.	mm	mm	mm	mm
1761099	SL 3014	480	33	450	1


VH 30

SPRING STEEL SOCKET RAIL 3/8"

- For 3/8" sockets
- Delivery without tools

10

3/8"

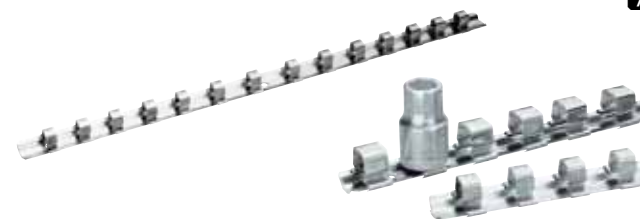

Code	No.	mm	mm
5164810	VH 30	80	1



Adaptor set 1/4" up to 3/4"
S 2032-05 is listed on page 101

SETS 10 (3/8")

10 3/8"

30 D / D 30 D

SOCKET SET 3/8" 12 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 206 x 62 x 40 mm

10

3/8"

U-DRIVE



Code	No.	mm	mm
6235200	30 DMU-10 U-10 3093 U-10 O 30 6 7 8 9 10 11 13 14 17 19 3090-5	1.0	1
6238730	D 30 DMU-10 U-10 3093 U-10 D 30 6 7 8 9 10 11 13 14 17 19 3090-5	1.0	1
6239030	D 30 DAU-10 U-10 3093 U-10 O 30 1/4 5/16 11/32 3/8" D 30 7/16 1/2 9/16 5/8 11/16 3/4" 3090-5	1.0	1

30 G / D 30 G

SOCKET SET 3/8" 17 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm

10

3/8"

U-DRIVE



Code	No.	mm	mm
6235980	30 GMU-3 U-3 3093 U-3 O 30 6 7 8 9 10 11 13 14 15 16 17 19 3087 3090-5 -10 3095	1.9	1
6235710	30 GMU-10 U-10 3093 U-10 O 30 6 7 8 9 10 11 13 14 15 16 17 19 3087 3090-5 -10 3095	1.9	1
6240200	D 30 GMU-3 U-3 3093 U-3 D 30 6 7 8 9 10 11 13 14 15 16 17 19 3087 3090-5 -10 3095	1.9	1



Code	No.		
6239380	D 30 GMU-10 U-10 3093 U-10 D 30 6 7 8 9 10 11 13 14 15 16 17 19 3087 3090-5 -10 3095	1.9	1
6240390	D 30 GAU-3 U-3 3093 U-3 O 30 1/4 9/32 5/16 11/32 3/8" D 30 7/16 1/2 9/16 19/32 5/8 11/16 3/4" 3087 3090-5 -10 3095	1.9	1
6239540	D 30 GAU-10 U-10 3093 U-10 O 30 1/4 9/32 5/16 11/32 3/8" D 30 7/16 1/2 9/16 19/32 5/8 11/16 3/4" 3087 3090-5 -10 3095	1.9	1

30 H / D 30 H

SOCKET SET 3/8" 23 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm



Code	No.		
6238300	30 HMU-3 U-3 3093 U-3 O 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 3087 3090-5 -10 3095	3.1	1
6235470	30 HMU-10 U-10 3093 U-10 O 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 3087 3090-5 -10 3095	3.1	1
6240470	D 30 HMU-3 U-3 3093 U-3 D 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 3087 3090-5 -10 3095	3.1	1
6239700	D 30 HMU-10 U-10 3093 U-10 D 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 3087 3090-5 -10 3095	3.1	1

30 I / D 30 I

SOCKET SET 3/8" 26 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm



Code	No.		
6229900	30 IMU-3 U-3 3093 U-3 O 30 6 7 8 9 10 11 12 13 14 15 16 17 19 IS 30 5,5 8 IN 30 4 5 6 8 IKS 30 2 3 3087 3090-5 -10 3095	2.3	1
6229740	30 IMU-10 U-10 3093 U-10 O 30 6 7 8 9 10 11 12 13 14 15 16 17 19 IS 30 5,5 8 IN 30 4 5 6 8 IKS 30 2 3 3087 3090-5 -10 3095	2.3	1
6230080	D 30 IMU-3 U-3 3093 U-3 D 30 6 7 8 9 10 11 12 13 14 15 16 17 19 IS 30 5,5 8 IN 30 4 5 6 8 IKS 30 2 3 3087 3090-5 -10 3095	2.3	1
6229820	D 30 IMU-10 U-10 3093 U-10 D 30 6 7 8 9 10 11 12 13 14 15 16 17 19 IS 30 5,5 8 IN 30 4 5 6 8 IKS 30 2 3 3087 3090-5 -10 3095	2.3	1

30 Q / D 30 Q

SOCKET SET 3/8" 35 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 315 x 181 x 40 mm



Code	No.		
6238490	30 QMU-3 U-3 3093 U-3 O 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 880 6,5 7 8 885 3 4 5 6 8 890 1 2 3 3087 3090-5 -10 3095 870 KB 830	3.1	1
6235630	30 QMU-10 U-10 3093 U-10 O 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 880 6,5 7 8 885 3 4 5 6 8 890 1 2 3 3087 3090-5 -10 3095 870 KB 830	2.8	1
6240550	D 30 QMU-3 U-3 3093 U-3 D 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 880 6,5 7 8 885 3 4 5 6 8 890 1 2 3 3087 3090-5 -10 3095 870 KB 830	3.4	1
6239970	D 30 QMU-10 U-10 3093 U-10 D 30 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 880 6,5 7 8 885 3 4 5 6 8 890 1 2 3 3087 3090-5 -10 3095 870 KB 830	3.4	1

THE NEW GENERATION OF GEDORE SOCKET SETS



- Innovative, functional design
- Inside-folded, seamless edge provides added strength. The tool and foam inserts are secured to prevent them being lost
- ABS plastic tool insert, resistant to oils and greases
- Tool insert with the socket sizes permanently laser marked
- With the lid closed, the tools sit securely in their pockets
- Boxes designed so that they can be stacked easily
- Large, rounded fasteners can be opened and closed even when the user is wearing gloves
- Contoured carry handle ensures comfortable carrying even for long periods
- Environmentally-friendly powder-coated in GEDORIT blue

D 30 KMU-20

SOCKET SET 3/8" 40 pieces

- For sheet steel case with insert
- Dimensions: 320 x 210 x 55 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



10

3/8"

6.3

1/4"

Code	No.		
1973347	D 30 KMU-20	1.8	1
	- U-20 3093 U-20 3093 U-3 T - D 30 8 9 10 11 12 13 14 15 16 17 18 19 680 4 5,5 6,5 685 3 4 5 6 685 X 5 6 8 687 TX T10 T15 T20 T25 T27 T30 690 1 2 690 PZD 1 2 3090 KR-3 3090-5 630 673 10 676 699		

D 30 TX20 U-20

SOCKET SET 3/8" + 1/4" 52 pieces

- Tool set for general industrial and automotive applications
- 3/8" and 1/4" sockets for protruding and recessed TORX® screws
- With robust lever-change reversible ratchet with push-button release
- In sheet steel case with insert
- Dimensions: 320 x 210 x 55 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



10

3/8"

6.3

1/4"

1/4"

Code	No.		
2075695	D 30 TX20 U-20		1
	- U-20 3093 U-20 U-20 2093 U-20 - D 30 10 11 12 13 14 15 16 17 18 19 21 22 - TX 30 E11 E12 E14 ITX 30 T45 T50 - D 20 4 4,5 5 5,5 6 7 8 9 10 11 12 13 - TX 20 E5 E6 E7 E8 E10 687 TX T10 T15 T20 T25 T27 T30 T40 3090 KR-3 3090-5 2090 KR-2 2090-6 620 673 6,3 10 676 699		

Detailed information on products,
promotions and trade fairs

... www.gedore.com



IN 30 LKM

SCREWDRIVER BIT SOCKET SET 3/8" 10 pieces

- For in-hex screws (INBUS®), short and long
- In plastic case
- Dimensions: 200 x 120 x 38 mm
- INBUS® = reg. trademark of Acument GmbH & Co. OHG, 56567 Neuwied



10

3/8"

Code	No.		
1509918	IN 30 LKM	765	1
	- IN 30 4 5 6 8 10 - IN 30 L 4 5 6 8 10		

ITX 30 PM

SCREWDRIVER BIT SOCKET SET 3/8" 7 pieces

- For recessed TORX® screws
- In blue sheet steel case
- Dimensions: 210 x 70 x 32 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



10

3/8"

Code	No.		
1509926	ITX 30 PM	585	1
	ITX 30 T20 T25 T27 T30 T40 T45 T50		

ITX 30 LKP

SCREWDRIVER BIT SOCKET SET 3/8" 14 pieces

- For recessed TORX® screws, short and long
- In plastic case
- Dimensions: 200 x 120 x 38 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



10

3/8"

Code	No.		
1509950	ITX 30 LKP	1065	1
	- ITX 30 T20 T25 T27 T30 T40 T45 T50 - ITX 30 L T20 T25 T27 T30 T40 T45 T50		

**ITX 30 TX-015****SCREWDRIVER BIT SOCKET SET 3/8" 15 pieces**

- For protruding and recessed TORX® screws
- In plastic case
- Dimensions: 200 x 120 x 38 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

10**3/8"**

Code	No.		
1509942	ITX 30 TX-015 ✱ ITX 30 T20 T25 T27 T30 T40 T45 T50 ○ TX 30 E5 E6 E7 E8 E10 E11 E12 E14	803	1

TX 30 E-08**SCREWDRIVER BIT SOCKET SET 3/8" 8 pieces**

- For protruding TORX® screws
- In GEDORIT blue sheet steel case
- Dimensions: 210 x 70 x 32 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

10**3/8"**

Code	No.		
1509934	TX 30 E-08 ○ TX 30 E5 E6 E7 E8 E10 E11 E12 E14	450	1

30 TX 20**SCREWDRIVER BIT SOCKET SET 3/8" + 1/4" 28 pieces**

- 3/8" and 1/4" sockets for protruding and recessed TORX® screws
- In plastic case
- Dimensions: 275 x 150 x 42 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

6,3**1/4"****10****3/8"**

Code	No.		
1509969	30 TX 20 ✱ ITX 30 T25 T27 T30 T40 T45 T50 ✱ ITX 30 L T20 T25 T27 T30 T40 T45 T50 ○ TX 30 E8 E10 E11 E12 E14 ✱ ITX 20 T8 T9 T10 T15 T20 ○ TX 20 E4 E5 E6 E7 2030	1465	1

VB 30**DISPLAY BOX 3/8" 228 pieces**

- With 228 3/8" sockets
- Display box empty (VB 30 L) in GEDORIT silver sheet steel
- Dimensions: 430 x 300 x 220 mm

10**3/8"**

Code	No.		
6233500	VB 30 S VB 30 + VB 30 L	10.4	1
1888072	S VB 30 12x ○ 30 10 13 10x ○ 30 6 7 8 9 8x ○ 30 11 12 14 15 17 19 5x ○ 30 16 18 20 21 22 10x ✱ IN 30 5 8x ✱ IN 30 4 6 5x ✱ IN 30 8 10 5x ✱ IS 30 5,5 8 10 5x ✱ IKS 30 1 2 3 5x ✱ INX 30 5 6 8 10x 3019	12.0	1
6233690	VBD 30 S VBD 30 + VB 30 L	16.0	1
1888080	S VBD 30 12x ✱ D 30 10 13 10x ✱ D 30 6 7 8 9 8x ✱ D 30 11 12 14 15 17 19 5x ✱ D 30 16 18 20 21 22 10x ✱ IN 30 5 8x ✱ IN 30 4 6 5x ✱ IN 30 8 10 5x ✱ IS 30 5,5 8 10 5x ✱ IKS 30 1 2 3 5x ✱ INX 30 5 6 8 10x 3019	12.0	1
5231940	VB 30 L	6.4	1



12.5 (1/2") SQUARE DRIVE

12.5 1/2" 12.5 1/2"

SOCKETS 12.5 (1/2")



1/2"


19

SOCKET 1/2" hexagon

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- * not standardised

12.5

1/2"



Code	No.	*	Ø mm	L	d ₁	d ₂	t	±	±
6130020	19 8		8	38.0	13.0	22.5	13.5	45	10
6130100	19 9	*	9	38.0	14.2	22.5	13.5	48	10
6130290	19 10		10	38.0	15.5	22.5	13.5	50	10
6130370	19 11		11	38.0	16.7	22.5	12.5	53	10
6130450	19 12		12	38.0	18.0	22.5	12.5	55	10
6130530	19 13		13	38.0	19.2	22.5	12.5	60	10
6130610	19 14		14	38.0	20.5	22.5	12.5	62	10
6130880	19 15		15	39.5	21.7	23.8	15.0	65	10
6130960	19 16		16	39.5	22.5	23.8	15.0	68	10
6131180	19 17		17	39.5	24.0	22.5	15.0	70	10
6131260	19 18		18	39.5	25.5	23.0	17.0	72	10
6131340	19 19		19	40.0	26.7	24.2	17.0	80	10
6131420	19 20		20	40.0	28.0	25.5	17.0	85	10
6131500	19 21		21	41.5	29.2	26.0	18.5	95	10
6131690	19 22		22	41.5	30.5	26.3	18.5	100	10
6131770	19 23	*	23	41.5	31.7	27.5	18.5	105	10
6131850	19 24		24	41.5	33.0	28.0	18.5	110	10
6131930	19 25	*	25	41.5	34.2	28.8	18.5	120	10
6132070	19 26	*	26	41.5	35.5	29.4	18.5	130	10
6132150	19 27		27	41.5	36.7	30.0	18.5	150	10
6132230	19 28	*	28	43.0	38.0	30.5	20.0	165	10
6132310	19 29	*	29	43.0	39.2	31.2	20.0	180	10
6132580	19 30		30	43.0	40.5	32.5	20.5	200	10
6132740	19 32		32	44.5	43.0	34.5	22.5	210	10
6138270	19 34		34	44.5	45.5	37.0	22.5	260	10
1718711	19 36	*	36	44.5	48.0	38.0	22.5	260	10


19 L

SOCKET 1/2" long, hexagon

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated

12.5

1/2"



Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
1718738	19 L 10	10	77.0	15.5	22.5	12.0	85	1
1718746	19 L 11	11	77.0	16.7	22.5	13.0	90	1
1718754	19 L 12	12	77.0	18.0	22.5	14.0	90	1
1718762	19 L 13	13	77.0	19.2	22.5	16.0	105	1
1718770	19 L 14	14	77.0	20.5	22.5	17.0	125	1
1718789	19 L 15	15	77.0	21.7	22.5	17.0	110	1
1718800	19 L 16	16	77.0	23.0	24.0	18.0	120	1
1718819	19 L 17	17	77.0	24.0	24.0	18.0	140	1
1718827	19 L 18	18	82.0	25.5	25.0	20.0	145	1
1718835	19 L 19	19	82.0	26.7	26.0	22.0	165	1


D 19

SOCKET 1/2" UD profile

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- * not standardised

12.5

1/2"



Code	No. G-	*	Ø mm	L	d ₁	d ₂	t	±	±
6133040	D 19 8		8	38.0	13.0	22.5	7.0	45	10
6133120	D 19 9	*	9	38.0	14.2	22.5	8.0	48	10
6133200	D 19 10		10	38.0	15.5	22.5	13.5	50	10
6133390	D 19 11		11	38.0	16.7	22.5	12.5	53	10
6133470	D 19 12		12	38.0	18.0	22.5	12.5	55	10
6133550	D 19 13		13	38.0	19.2	22.5	12.5	60	10
6133630	D 19 14		14	38.0	20.5	22.5	12.5	62	10
6133710	D 19 15		15	39.5	21.7	23.8	15.0	65	10
6133980	D 19 16		16	39.5	22.5	23.8	15.0	68	10
6134010	D 19 17		17	39.5	24.0	22.5	15.0	70	10
6134280	D 19 18		18	39.5	25.5	23.0	17.0	72	10
6134360	D 19 19		19	40.0	26.7	24.2	17.0	80	10
6134440	D 19 20		20	40.0	28.0	25.5	17.0	85	10
6134520	D 19 21		21	41.5	29.2	26.0	18.5	95	10
6134600	D 19 22		22	41.5	30.5	26.3	18.5	100	10
6134790	D 19 23	*	23	41.5	31.7	27.5	18.5	105	10
6134870	D 19 24		24	41.5	33.0	28.0	18.5	110	10
6134950	D 19 25	*	25	41.5	34.2	28.8	18.5	120	10
6135090	D 19 26	*	26	41.5	35.5	29.4	18.5	130	10
6135170	D 19 27		27	41.5	36.7	30.0	18.5	150	10
6135250	D 19 28	*	28	43.0	38.0	30.5	20.0	165	10
6135330	D 19 29	*	29	43.0	39.2	31.2	20.0	180	10
6135410	D 19 30		30	43.0	40.5	32.5	20.5	200	10
6135760	D 19 32		32	44.5	43.0	34.5	22.5	210	10
6135840	D 19 33	*	33	44.5	44.2	36.0	22.5	210	10

Code	No. G-	Ø AF	L	d ₁	d ₂	t	±	±
6136060	D 19 5/16AF	5/16	38.0	13.0	22.5	7.0	45	5
6136140	D 19 11/32AF	11/32	38.0	13.9	22.5	8.0	48	5
6136220	D 19 3/8AF	3/8	38.0	14.9	22.5	15.0	58	5
6136300	D 19 13/32AF	13/32	38.0	15.9	22.5	13.5	50	5
6136490	D 19 7/16AF	7/16	38.0	16.7	22.5	12.5	53	5
6136570	D 19 1/2AF	1/2	38.0	18.7	22.5	12.5	60	5
6136650	D 19 9/16AF	9/16	38.0	20.7	22.5	12.5	62	5
6136730	D 19 19/32AF	19/32	39.5	21.7	23.8	15.0	65	5
6136810	D 19 5/8AF	5/8	39.5	22.5	23.8	15.0	68	5
6137030	D 19 11/16AF	11/16	39.5	24.7	22.5	17.0	70	5
6137110	D 19 3/4AF	3/4	40.0	26.7	24.2	17.0	80	5
6137380	D 19 25/32AF	25/32	40.0	27.7	25.3	17.0	85	5
6137460	D 19 13/16AF	13/16	41.5	28.5	25.7	18.5	95	5
6137540	D 19 7/8AF	7/8	41.5	30.6	26.5	18.5	100	5
6137620	D 19 15/16AF	15/16	41.5	32.6	28.3	18.5	110	5
6137700	D 19 1AF	1	41.5	34.6	28.9	18.5	123	5
6137890	D 19 1.1/16AF	1.1/16	41.5	36.7	30.0	18.5	150	5
6137970	D 19 1.1/8AF	1.1/8	43.0	38.6	31.0	20.0	180	5
6138000	D 19 1.3/16AF	1.3/16	43.0	40.6	32.5	20.5	200	5
6138190	D 19 1.1/4AF	1.1/4	44.5	42.6	34.5	22.5	210	1

Code	No. O	Ø mm	L	d ₁	d ₂	t	±	±
6138780	D 19 3/16W	3/16	38.0	17.0	22.5	12.5	53	1
6138860	D 19 1/4W	1/4	38.0	19.5	22.5	12.5	60	1
6138940	D 19 5/16W	5/16	39.5	21.9	23.8	15.0	65	1
6139080	D 19 3/8W	3/8	39.5	25.5	23.0	17.0	72	1
6139160	D 19 7/16W	7/16	41.5	28.8	26.0	18.5	95	1
6139240	D 19 1/2W	1/2	41.5	32.1	27.8	18.5	105	1
6139320	D 19 9/16W	9/16	41.5	34.9	29.2	18.5	130	1
6139400	D 19 5/8W	5/8	43.0	37.8	30.5	20.0	165	1
6139590	D 19 11/16W	11/16	43.0	41.0	33.0	20.5	200	1
6138430	D 19 3/4W	3/4	44.5	44.2	36.0	22.5	75	1




D 19 L

SOCKET 1/2" long, UD profile

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- Sizes 16, 18, 21 with Ø 8 mm hole drilled for tommy bar

12.5

1/2"



Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6141140	D 19 L 10	10	77.0	15.5	22.5	12.0	85	10
6141220	D 19 L 12	12	77.0	18.0	22.5	14.0	90	10
6140170	D 19 L 13	13	77.0	19.2	22.5	16.0	105	10
6140250	D 19 L 14	14	77.0	20.5	22.5	17.0	125	10
6142460	D 19 L 15	15	77.0	21.7	22.5	17.0	110	10
6142540	D 19 L 16	16	77.0	23.0	24.0	18.0	120	10
6140330	D 19 L 17	17	77.0	24.0	24.0	18.0	140	10
6142380	D 19 L 18	18	82.0	25.5	25.0	20.0	145	10
6140410	D 19 L 19	19	82.0	26.7	26.0	22.0	165	10
6140680	D 19 L 21	21	82.0	29.2	28.5	24.0	205	10
6145050	D 19 L 22	22	82.0	30.5	28.5	24.0	200	10
6140760	D 19 L 24	24	82.0	33.0	29.0	26.0	250	10
6141060	D 19 L 27	27	82.0	36.7	30.0	30.0	270	10
6145640	D 19 L 30	30	82.0	40.5	32.5	33.0	330	10
6191320	D 19 L 32	32	82.0	43.0	34.5	36.0	410	10
6147500	D 19 L 34	34	82.0	45.5	36.5	37.0	500	5

Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6141300	D 19 L 1/2AF	1/2	77.0	18.7	22.5	16.0	105	1
6141490	D 19 L 9/16AF	9/16	77.0	20.7	22.5	17.0	125	1
6141570	D 19 L 5/8AF	5/8	77.0	22.5	24.0	18.0	130	1
6141650	D 19 L 11/16AF	11/16	77.0	24.7	24.8	18.0	140	1
6141730	D 19 L 3/4AF	3/4	82.0	26.7	26.0	22.0	165	1
6141810	D 19 L 13/16AF	13/16	82.0	28.5	28.5	22.0	205	1
6142030	D 19 L 7/8AF	7/8	82.0	30.6	28.5	24.0	230	1
6142110	D 19 L 15/16AF	15/16	82.0	32.6	29.0	26.0	250	1


TX 19

SOCKET 1/2" for protruding TORX® head screws

- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, polished, chrome-plated
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

12.5

1/2"



Code	No.	Ø	mm	L	d ₁	d ₂	t	±	±
6145720	TX 19 E10	E10	M8	9.42	38.0	13.5	22.5	15.5	50 10
6194180	TX 19 E11	E11	-	10.08	38.0	14.0	22.5	15.5	50 5
6147340	TX 19 E12	E12	M10	11.17	38.0	15.5	22.5	15.5	55 10
6147420	TX 19 E14	E14	M12	12.90	38.0	17.0	22.5	13.0	55 10
6194420	TX 19 E16	E16	M12	14.76	38.0	19.0	22.5	13.0	60 10
6194500	TX 19 E18	E18	M14	16.70	40.0	21.0	24.5	14.0	65 10
6194690	TX 19 E20	E20	M16	18.45	40.0	23.5	24.5	14.0	70 10
6195070	TX 19 E24	E24	M18 - M20	22.16	41.5	28.5	26.0	16.0	85 5

ITX 19

SCREWDRIVER BIT SOCKET 1/2" for recessed TORX® head screws

- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

12.5

1/2"



Code	No.	mm	mm	mm	L ₁	L ₂	d	±	±
6152930	ITX 19 T20	T20	M4 - M5	3.86	55	17	22.5	60	10
6154200	ITX 19 T25	T25	M4,5 - M5	4.43	55	17	22.5	65	10
6154630	ITX 19 T27	T27	M4,5 - M6	4.99	55	17	22.5	65	10
6156170	ITX 19 T30	T30	M6 - M7	5.52	55	17	22.5	65	10
6156330	ITX 19 T40	T40	M7 - M8	6.65	55	17	22.5	65	10
6157060	ITX 19 T45	T45	M8 - M10	7.82	55	17	22.5	70	10
6158030	ITX 19 T50	T50	M10	8.83	55	17	22.5	90	10
6158380	ITX 19 T55	T55	M12	11.22	55	17	23.0	110	10
6158540	ITX 19 T60	T60	M14	13.25	55	15	24.7	110	10



ITX 19 L

SCREWDRIVER BIT SOCKET 1/2" long, for recessed TORX® head screws

- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

12.5

1/2"



Code	No.	mm	mm	mm	L ₁	L ₂	d	±	±
6188020	ITX 19 L T20-100	T20	M4 - M5	3.86	100	62	22.5	80	5
6188100	ITX 19 L T25-100	T25	M4,5 - M5	4.43	100	62	22.5	85	5
6188370	ITX 19 L T27-100	T27	M4,5 - M6	4.99	100	62	22.5	85	5
6152500	ITX 19 L T30-100	T30	M6 - M7	5.52	100	62	22.5	85	10
6152690	ITX 19 L T40-100	T40	M7 - M8	6.65	100	62	22.5	85	10
6155870	ITX 19 L T45-100	T45	M8 - M10	7.82	100	62	22.5	90	10
6158700	ITX 19 L T50-100	T50	M10	8.83	100	62	22.5	105	10
6159940	ITX 19 L T55-100	T55	M12	11.22	100	62	23.0	155	10
6188450	ITX 19 L T60-100	T60	M14	13.25	100	60	24.7	155	5
6105180	ITX 19 L T70-100	T70	M16	15.55	100	60	28.0	170	5

ITX 19 B

SCREWDRIVER BIT SOCKET 1/2" for recessed TORX® head screws with pilot

- ✓ Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, gun-metal finish
- ✓ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

12,5

1/2"



Code	No.	⌀	mm	mm	L ₁	L ₂	d	Bore	mm	mm
6192720	ITX 19 B T20	T20	M4 - M5	3.86	55	17	22.5	1,55 x 1,86	60	5
6195660	ITX 19 B T25	T25	M4,5 - M5	4.43	55	17	22.5	1,93 x 2,04	65	5
6196390	ITX 19 B T27	T27	M4,5 - M6	4.99	55	17	22.5	2,18 x 2,29	65	5
6200170	ITX 19 B T30	T30	M6 - M7	5.52	55	17	22.5	2,56 x 2,92	65	5
6200410	ITX 19 B T40	T40	M7 - M8	6.65	55	17	22.5	2,92 x 3,28	65	5
6200840	ITX 19 B T45	T45	M8 - M10	7.82	55	17	22.5	3,45 x 3,68	70	5
6201300	ITX 19 B T50	T50	M10	8.83	55	17	23.0	3,83 x 3,78	90	5
6202700	ITX 19 B T55	T55	M12	11.22	55	15	24.7	4,85 x 4,79	110	5
6203270	ITX 19 B T60	T60	M14	13.25	56	16	28.0	5,63 x 7,87	110	5


IS 19

SCREWDRIVER BIT SOCKET 1/2" for slotted head screws

- ✓ Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, blade as per DIN ISO 2380-1, Form B, manganese-phosphated

12,5

1/2"



Code	No.	mm	mm	L ₁	L ₂	d	mm	mm
6161760	IS 19 6,5x1,2	1.2	6.5	60	22	22.5	70	1
6656060	IS 19 8x1,2	1.2	8.0	60	22	22.5	80	5
6656140	IS 19 10x1,6	1.6	10.0	60	22	22.5	115	5
6656220	IS 19 12x2	2.0	12.0	60	22	23.0	120	5
6162140	IS 19 14x2,5	2.5	14.0	60	20	24.7	130	5
6656490	IS 19 16x2,5	2.5	16.0	60	20	28.0	190	5
6656570	IS 19 18x2,5	2.5	18.0	60	20	27.0	190	10


IKS 19

SCREWDRIVER BIT SOCKET 1/2" for cross-slotted head screws PH

- ✓ Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, tip as per DIN ISO 8764-1 PH, gun-metal finish

12,5

1/2"



Code	No.	⌀ PH	L ₁	L ₂	d	mm	mm
6656650	IKS 19 2	2	60	22	22.5	75	10
6656730	IKS 19 3	3	60	22	22.5	80	10
6656810	IKS 19 4	4	60	22	23.0	100	10




IKS 19 PZD

SCREWDRIVER BIT SOCKET 1/2" for cross-slotted head screws PZ

- ✓ Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, tip as per DIN ISO 8764-1 PZ, gun-metal finish

12,5

1/2"



Code	No.	⌀ PZ	L ₁	L ₂	d	mm	mm
6156680	IKS 19 PZD 2	2	60	22	22.5	80	10
6156760	IKS 19 PZD 3	3	60	22	22.5	80	10
6156840	IKS 19 PZD 4	4	60	22	23.0	80	5


IN 19

SCREWDRIVER BIT SOCKET 1/2" for in-hex screws

- ✓ Acc. to DIN 7422
- ✓ Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- ✓ Hand-operated, chrome-plated
- ✓ With pressed-in pin, bit manganese-phosphated
- ✓ **IN 19 17** for oil filter and drain plug screws
- ✓ * not standardised

12,5

1/2"



Code	No.	*	⌀ mm	L ₁	L ₂	d	mm	mm
6153070	IN 19 4	*	4	60	22	22.5	45	10
6153150	IN 19 5	*	5	60	22	22.5	50	10
6153230	IN 19 6		6	60	22	22.5	55	10
6153310	IN 19 7		7	60	22	22.5	58	10
6153580	IN 19 8		8	60	22	22.5	60	10
6153660	IN 19 9	*	9	60	22	22.5	63	10
6153740	IN 19 10		10	60	22	22.5	65	10
6153820	IN 19 12		12	60	22	23.0	75	10
6153900	IN 19 14		14	60	20	24.7	85	10
6154040	IN 19 17	*	17	60	20	28.0	115	10
6154120	IN 19 19	*	19	60	20	27.0	120	10

Code	No.	⌀ AF	L ₁	L ₂	d	mm	mm
6154710	IN 19 3/16AF	3/16	60	22	22.5	50	10
6154980	IN 19 7/32AF	7/32	60	22	22.5	53	10
6155010	IN 19 1/4AF	1/4	60	22	22.5	55	10
6155280	IN 19 9/32AF	9/32	60	22	22.5	58	5
6155360	IN 19 5/16AF	5/16	60	22	22.5	60	10
6155440	IN 19 3/8AF	3/8	60	22	22.5	65	10
6155520	IN 19 1/2AF	1/2	60	22	23.0	80	10
6155600	IN 19 9/16AF	9/16	60	20	24.7	85	10
6155790	IN 19 5/8AF	5/8	60	20	28.0	115	10




IN 19 L

SCREWDRIVER BIT SOCKET 1/2" long, for in-hex screws

- Acc. to DIN 7422
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, bit manganese-phosphated
- * t = stepped hexagon bit 13 mm
- * not standardised

12.5

1/2"



Code	No.	*	mm	L ₁	L ₂	d	* t	mm	mm
6162060	IN 19 L 5-90	*	5	90	52	22.5	13	75	10
6157140	IN 19 L 5-180	*	5	180	142	22.5	13	150	10
6157300	IN 19 L 6-90		6	90	52	22.5		70	10
6145800	IN 19 L 6-140		6	140	102	22.5	13	90	10
6145990	IN 19 L 6-160		6	160	122	22.5	13	120	10
6157570	IN 19 L 7-100		7	100	62	22.5		100	10
6157730	IN 19 L 8-90		8	90	52	22.5		75	10
6157810	IN 19 L 8-120		8	120	82	22.5		20	10
6158110	IN 19 L 10-140		10	140	102	22.5		130	10
6158460	IN 19 L 12-140		12	140	102	23.0		155	10
6158620	IN 19 L 14-140		14	140	100	24.7		190	10


IN 19 LK

SCREWDRIVER BIT SOCKET 1/2" long, with ball end for in-hex screws

- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, bit gun-metal finished
- Total swivel angle approx. 15°-20°

12.5

1/2"



Code	No.	mm	L ₁	L ₂	d	mm	mm
6162810	IN 19 LK 6-140	6	140	102	22.5	80	10
6165080	IN 19 LK 7-140	7	140	102	22.5	90	5
6165160	IN 19 LK 8-140	8	140	102	22.5	100	10
6166800	IN 19 LK 10-140	10	140	102	22.5	150	10
6172370	IN 19 LK 12-140	12	140	102	23.0	190	5

INX 19

SCREWDRIVER BIT SOCKET 1/2" for multi-point screws

- Acc. to DIN 2324
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, tip as per DIN 2325, manganese-phosphated
- * not standardised

12.5

1/2"



Code	No.	*	mm	L ₁	L ₂	d	mm	mm
6158890	INX 19 5	*	M5	55	17	22.5	60	10
6159000	INX 19 6	*	M6	55	17	22.5	65	10
6159270	INX 19 8		M8	55	17	22.5	70	10
6159430	INX 19 10		M10	55	17	22.5	75	10
6159780	INX 19 12		M12	55	17	23.0	80	10
1888943	INX 19 14		M14	57	17	24.7	85	10


INX 19 L

SCREWDRIVER BIT SOCKET 1/2" long, for multi-point screws

- Acc. to DIN 2324
- Square drive as per DIN 3120 - C 12.5, ISO 1174, with ball retaining groove
- Hand-operated, chrome-plated
- With pressed-in pin, tip as per DIN 2325, manganese-phosphated
- * not standardised

12.5

1/2"



Code	No.	*	mm	L ₁	L ₂	d	mm	mm
6159190	INX 19 L 6-100	*	M6	100	62	22.5	80	10
6159350	INX 19 L 8-100		M8	100	62	22.5	100	10
6159510	INX 19 L 10-100		M10	100	62	22.5	105	10
6159860	INX 19 L 12-100		M12	100	62	23.0	105	10
1888951	INX 19 L 14-100		M14	100	60	24.7	110	10

RATCHETS 12.5 (1/2")


1993 U-20

REVERSIBLE RATCHET 1/2"

- Acc. to DIN 3122, ISO 3315
- Fine-toothed, with lever change and push-button release
- Non-slip 2-component handle with hanging hole
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	mm	mm	mm	mm	mm	mm
1436686	1993 U-20	1/2	12.5	6	270	37.5	530



1993 U-10 L

REVERSIBLE RATCHET 1/2" long pattern

- Acc. to DIN 3122, ISO 3315
- With lever change
- Push-button release
- Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	mm	mm	mm	mm	mm	mm
6154550	1993 U-10 L	1/2	12.5	11,25	350	41	650


1993 U-10 T

REVERSIBLE RATCHET 1/2"

- Acc. to DIN 3122, ISO 3315
- With recessed lever change
- Push-button release
- Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	■	°	mm	mm	mm	mm	mm
6142620	1993 U-10 T	1/2	12.5	11,25	270	39	700	5	


1993 GU-10 XL

SWIVEL HEAD REVERSIBLE RATCHET 1/2" extra long

- Swivels through 180°, with joint lock
- With lever change
- Push-button release
- Max. torque 600 N-m
- Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	■	°	mm	mm	mm	mm	mm
2018934	1993 GU-10 XL	1/2	12.5	11,25	600			1	


1993 ALU-10

ALUMINIUM REVERSIBLE RATCHET 1/2"

- Design spec. similar to DIN 3122, ISO 3315
- Made from special-purpose drop-forged and hardened aluminium
- The mechanism as in all U-10 ratchets is made from high quality steel
- With lever change
- Push-button release
- Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device
- Extremely lightweight - just 350 g

12.5

1/2"



Code	No.	□"	■	°	mm	mm	mm	mm	mm
6142700	1993 ALU-10	1/2	12.5	11,25	270	39	350	5	




1993 GU-3

SWIVEL HEAD REVERSIBLE RATCHET 1/2"

- Swivels through 180°, with joint lock
- Fine-toothed
- Max. torque 300 N-m
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	■	°	mm	mm	mm	mm	mm
6144320	1993 GU-3	1/2	12.5	5	282	40.5	380	5	


1993 Z-94

RATCHET HANDLE WITH COUPLER 1/2"

- Acc. to DIN 3122, ISO 3315
- With square coupler, medium-fine toothed, extremely rugged
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	■	°	mm	mm	mm	mm	mm
6144590	1993 Z-94	1/2	12.5	15	270	21.9	440	5	


1993 U-3

REVERSIBLE RATCHET 1/2"

- Acc. to DIN 3122, ISO 3315
- With non-slip metal disc change, fine-toothed and robust
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	■	°	mm	mm	mm	mm	mm
6144240	1993 U-3	1/2	12.5	5	270	40.5	400	5	






1993 U-10 K

PLASTIC RATCHET 1/2"

- For fast and easy tightening of bolted connections up to max. 70 N-m
- Return angle 11.25°
- Made from sturdy compound material with a steel mechanism
- Dimensions 44 x 145 x 42.2 mm
- Available in five colours

12.5

1/2"



U-10



Code	No.	Colour	□"	□	■"	■	↺°	↻	📦
6242760	1993 U-10 K SCHWARZ	signal-black	1/2	12.5	11,25	247	5		
6244620	1993 U-10 K GRÜN	moss-green	1/2	12.5	11,25	247	1		
6244700	1993 U-10 K GRAU	anthracite-grey	1/2	12.5	11,25	247	1		
6244890	1993 U-10 K BLAU	sky-blue	1/2	12.5	11,25	247	1		
1505025	1993 U-10 K SIGNALGRAU	signal-grey	1/2	12.5	11,25	247	5		

VS 1930

DISPLAY STAND 1/2" for plastic ratchets

- Display stand for 20 plastic ratchets in four different colours
- In sturdy wire and sheet metal design

Contents:

- 16 pieces 1993 U-10 K (4 each sky-blue RAL 5015, black RAL 9004, signal-grey RAL 7004, moss-green RAL 6005)
- 4 pieces 3093 U-10 K (1 each sky-blue RAL 5015, black RAL 9004, signal-grey RAL 7004, moss-green RAL 6005)

10

3/8"

12.5

1/2"



Code	No.	Description	↺°	📦
1461621	VS 1930 U-10 K	Display stand with assortment	6.0	1
1464175	VS 1930 U-10 K L	Display stand empty	1.1	1

Deviant packing units see article description.

ACCESSORIES 12.5 (1/2")

1930

REDUCER 1/2" TO 3/8"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device
- Load capacity max. 202 N-m



12.5

1/2"

10

3/8"

Code	No.	□"	□	■"	■	↺mm	↻	📦
6143000	1930	1/2	12.5	3/8	10	38.5	60	10

1932

CONVERTOR 1/2" TO 3/4"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device



12.5

1/2"

20

3/4"

Code	No.	□"	□	■"	■	↺mm	↻	📦
6143190	1932	1/2	12.5	3/4	20	44	130	10

1940

HIGH-SPEED SWIVEL DISC for 1/2" ratchets

- For 12.5 mm (1/2") ratchets
- Tightens loose screws with a flick of the wrist
- Easy assembly between release head and socket
- Speeds up the screwing process

12.5

1/2"



Code	No.	□"	□	↺mm	↻	📦
1640887	1940	1/2	12.5	15		1

1981 K

L-HANDLE 1/2"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	□	↺mm	↻	📦
6143270	1981 K	1/2	12.5	220	260	1

1985

SPEED BRACE 1/2"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12.5

1/2"



Code	No.	□"	□	↺mm	↻	📦
6143350	1985	1/2	12.5	395	650	1

1987
SLIDING T BAR 1/2"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12,5
1/2"


Code	No.	■"	■	↳mm↳	↕	📦
6143430	1987	1/2	12.5	292	350	10

1987 A
SLIDING T BAR WITH RELEASE 1/2"

- Secured against unintentional removal
- Turn handle for easy locking and releasing
- Accidental release when working is prevented because of the asymmetrical release point
- Particularly useful for work in sensitive areas where certainty against loss is a theme
- Examples: Aircraft engine, work in deep machine bodies
- DBGM

12,5
1/2"


Code	No.	■"	■	↳mm↳	↕	📦
1871641	1987 A	1/2	12.5	292	375	1

1990 A
EXTENSION 1/2" with release

- Easy access to deep-fitting screws
- Locking ring prevents unintentional release of the socket
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12,5
1/2"


Code	No.	■"	■	↳mm↳	↕	📦
1640828	1990 A-5	1/2	12.5	125	315	1
1640801	1990 A-10	1/2	12.5	250	190	1


1990 KR
UNIVERSAL EXTENSION 1/2"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device
- The extension is able to pivot up to 15°
- Load capacity max. 230 N-m

12,5
1/2"


Code	No.	■"	■	↳mm↳	↕	📦
6173180	1990 KR-5	1/2	12.5	125	180	1
6225590	1990 KR-7	1/2	12.5	180	245	1
6366570	1990 KR-10	1/2	12.5	250	250	1

1990
EXTENSION 1/2"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12,5
1/2"


Code	No.	*	■"	■	↳mm↳	↕	📦
6143510	1990-2.1/2	*	1/2	12.5	63	110	10
6143780	1990-3		1/2	12.5	76	120	10
6143860	1990-5		1/2	12.5	125	165	10
6142890	1990-7	*	1/2	12.5	180	250	10
6143940	1990-10		1/2	12.5	250	290	10
6129950	1990-12	*	1/2	12.5	305	400	1

1994
COUPLER 1/2"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12,5
1/2"


Code	No.	■"	■	↳mm↳	↕	📦
6144670	1994	1/2	12.5	37.8	40	10

1995
UNIVERSAL JOINT 1/2"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12,5
1/2"


Code	No.	■"	■	□"	□	↳mm↳	↕	📦
6144750	1995	1/2	12.5	1/2	12.5	73.5	150	10



1996-1997

SWIVEL HANDLE 1/2"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12.5
1/2"


Code	No.	□"	□	□mm□	□□	□
6144830	1996	1/2	12.5	255	440	1
6144910	1997	1/2	12.5	381	750	10

1998

SWIVEL HANDLE WITH SLIDING T 1/2"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, ball locking device

12.5
1/2"


Code	No.	□"	□	□mm□	□□	□
6199730	1998	1/2	12.5	460	1000	1

SL 19

TOOL HOLDING RAIL, MAGNETIC 1/2" empty

- External squares to take 12 or 16 standard commercial 12.5 mm (1/2") sockets
- Two female square adaptors to take ratchets, sliding T bars, extensions etc.
- A strong magnet securely holds the socket rail to ferrous metals
- Additional holes are provided for wall mounting the socket rail or attaching to non-ferrous materials
- The sockets are securely locked by the ball at the square-drive end by turning them 90°
- It is a simple matter to "unlock" and remove the sockets, by turning them 90° in the opposing direction
- Delivery without tools

12.5
1/2"
12.5
1/2"
1/2"


Code	No.	Execution	□mm□	mm	□□	□
1828665	SL 1912	for 12 pieces 1/2" sockets	480	33	470	1
1761102	SL 1916	for 16 pieces 1/2" sockets	580	33	550	1

VH 19

SPRING STEEL SOCKET RAIL 1/2"

- For 1/2" sockets
- Delivery without tools

12.5
1/2"


Code	No.	□□	□
5162520	VH 19	100	1



Adaptor set 1/4" up to 3/4"
S 2032-05 is listed on page 101



1/2"

SETS 12.5 (1/2")

12.5 1/2"

19 K / D 19 K

SOCKET SET 1/2" 11 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 281 x 79 x 48 mm

12.5
1/2"
1/2"
1/2"


Code	No.	□□	□
1953850	19 K MU-3 ● U-3 1993 U-3 ○ 19 10 11 13 14 15 17 19 22 24 □ 1990-5	1.9	1
1953958	D 19 K MU-3 ● U-3 1993 U-3 ⊗ D 19 10 11 13 14 15 17 19 22 24 □ 1990-5	1.9	1

19 H / D 19 H

SOCKET SET 1/2" 13 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 281 x 79 x 48 mm

12.5
1/2"
1/2"
1/2"


Code	No.	□□	□
1953842	19 H MU-3 ● U-3 1993 U-3 ○ 19 8 9 10 11 12 13 14 15 17 19 22 □ 1990-5	1.9	1
1953931	D 19 H MU-3 ● U-3 1993 U-3 ⊗ D 19 8 9 10 11 12 13 14 15 17 19 22 □ 1990-5	1.9	1

19 G

SOCKET SET 1/2" 16 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 320 x 210 x 55 mm

12.5

1/2"



Code	No.		
6122190	19 GMU-10 U-10T 1993 U-10 T 19 10 11 12 13 14 16 17 18 19 21 22 24 1990-5 -10 1987	3.4	1

19 PQ / D 19 PQ

SOCKET SET 1/2" 16 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 320 x 210 x 55 mm

12.5

1/2"



Code	No.		
6182920	19 PQMU-10 U-10T 1993 U-10 T 19 8 10 11 12 13 14 15 17 19 22 24 50 MH (20,8) 1990-7 1987 1995	3.2	1
6185270	D 19 PQMU-10 U-10T 1993 U-10 T D 19 8 10 11 12 13 14 15 17 19 22 24 50 MH (20,8) 1990-7 1987 1995	3.2	1

THE NEW GENERATION OF GEDORE SOCKET SETS


- Innovative, functional design
- Inside-folded, seamless edge provides added strength. The tool and foam inserts are secured to prevent them being lost
- ABS plastic tool insert, resistant to oils and greases
- Tool insert with the socket sizes permanently laser marked
- With the lid closed, the tools sit securely in their pockets
- Boxes designed so that they can be stacked easily
- Large, rounded fasteners can be opened and closed even when the user is wearing gloves
- Contoured carry handle ensures comfortable carrying even for long periods
- Environmentally-friendly powder-coated in GEDORIT blue

19 Q / D 19 Q

SOCKET SET 1/2" 17 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 320 x 210 x 55 mm

12.5

1/2"



Code	No.		
1953869	19 QMU-3 U-3 1993 U-3 19 10 11 12 13 14 15 17 19 22 24 27 30 32 1987 1990-10 1995	4.0	1
6151450	19 QMU-10 U-10T 1993 U-10 T 19 10 11 12 13 14 15 17 19 22 24 27 30 32 1987 1990-10 1995	4.2	1
1953966	D 19 QMU-3 U-3 1993 U-3 D 19 10 11 12 13 14 15 17 19 22 24 27 30 32 1987 1990-10 1995	3.9	1
6151530	D 19 QMU-10 U-10T 1993 U-10 T D 19 10 11 12 13 14 15 17 19 22 24 27 30 32 1987 1990-10 1995	4.2	1



Detailed information on products,
 promotions and trade fairs

... www.gedore.com



**19 F / D 19 F**

SOCKET SET 1/2" 19 pieces
✔ In GEDORIT blue sheet steel case
✔ Dimensions: 320 x 210 x 55 mm

12.5**1/2"**

Code	No.		
1953834	19 FMU-3 ● U-3 1993 U-3 ○ 19 10 11 12 13 14 15 16 17 19 22 24 27 30 32 — 1987 — 1990-5 -10 — 1995	4.6	1
6150990	19 FMU-10 ● U-10T 1993 U-10T ○ 19 10 11 12 13 14 15 16 17 19 22 24 27 30 32 — 1987 — 1990-5 -10 — 1995	4.6	1
1953877	D 19 FMU-3 ● U-3 1993 U-3 ● D 19 10 11 12 13 14 15 16 17 19 22 24 27 30 32 — 1987 — 1990-5 -10 — 1995	4.5	1
6151290	D 19 FMU-10 ● U-10T 1993 U-10T ● D 19 10 11 12 13 14 15 16 17 19 22 24 27 30 32 — 1987 — 1990-5 -10 — 1995	4.6	1

19 E / D 19 E

SOCKET SET 1/2" 21 pieces
✔ In GEDORIT blue sheet steel case
✔ Dimensions: 433 x 180 x 48 mm

12.5**1/2"**

Code	No.		
6630850	19 EMU-10 ● U-10T 1993 U-10T ○ 19 8 9 10 11 12 13 14 15 16 17 19 22 24 27 30 32 — 1987 — 1990-5 -10 — 1995	4.6	1
1413643	D 19 EMU-10 ● U-10T 1993 U-10T ● D 19 8 9 10 11 12 13 14 15 16 17 19 22 24 27 30 32 — 1987 — 1990-5 -10 — 1995	4.6	1

19 W / D 19 W

SOCKET SET 1/2" 24 pieces
✔ In GEDORIT blue sheet steel case
✔ Dimensions: 433 x 180 x 48 mm

12.5**1/2"**

Code	No.		
6154390	19 WMU-10 ● U-10T 1993 U-10T ○ 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 — 1987 — 1990-5 -10 — 1995	5.2	1
1953990	19 WMU-3 ● U-3 1993 U-3 ○ 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 — 1987 — 1990-5 -10 — 1995	5.2	1
6154470	D 19 WMU-10 ● U-10T 1993 U-10T ● D 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 — 1987 — 1990-5 -10 — 1995	5.2	1
1954032	D 19 WMU-3 ● U-3 1993 U-3 ● D 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 — 1987 — 1990-5 -10 — 1995	5.1	1
1954024	D 19 WAU-3 ● U-3 1993 U-3 ● D 19 5/16 3/8 13/32 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1" 1.1/16 1.1/8 1.3/16 1.1/4" — 1987 — 1990-5 -10 — 1995	5.0	1

**1/2"**

19 T / D 19 T

SOCKET SET 1/2" 25 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 525 x 203 x 50 mm

12.5

1/2"



Code	No.		
6148230	19 TMZ Z-94 1993 Z-94 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 1985 1987 1990-5 -10 1995	5.5	1
1953982	19 TMU-3 U-3 1993 U-3 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 1985 1987 1990-5 -10 1995	6.7	1
6151880	19 TMU-10 U-10T 1993 U-10T 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 1985 1987 1990-5 -10 1995	5.6	1
6148310	D 19 TMZ Z-94 1993 Z-94 D 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 1985 1987 1990-5 -10 1995	5.5	1
1954016	D 19 TMU-3 U-3 1993 U-3 D 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 1985 1987 1990-5 -10 1995	6.5	1
6151960	D 19 TMU-10 U-10T 1993 U-10T D 19 10 11 12 13 14 15 16 17 18 19 21 22 23 24 26 27 28 30 32 1985 1987 1990-5 -10 1995	5.6	1
6148900	D 19 TAZ Z-94 1993 Z-94 D 19 5/16 3/8 13/32 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1" 1.1/16 1.1/8 1.3/16 1.1/4" 1985 1987 1990-5 -10 1995	5.4	1
6149040	D 19 TAU-10 U-10T 1993 U-10T D 19 5/16 3/8 13/32 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1" 1.1/16 1.1/8 1.3/16 1.1/4" 1985 1987 1990-5 -10 1995	5.6	1

19 I / D 19 I

SOCKET SET 1/2" 27 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 433 x 180 x 48 mm

12.5

1/2"



Code	No.		
1953974	19 IMU-3 U-3 1993 U-3 19 10 11 12 13 14 15 17 19 22 24 27 30 IN 19 5 6 7 8 10 12 14 IS 19 8 10 IKS 19 2 3 1990-5 -10 1995	4.7	1
6139750	19 IMU-10 U-10T 1993 U-10T 19 10 11 12 13 14 15 17 19 22 24 27 30 IN 19 5 6 7 8 10 12 14 IS 19 8 10 IKS 19 2 3 1990-5 -10 1995	4.4	1
1954008	D 19 IMU-3 U-3 1993 U-3 D 19 10 11 12 13 14 15 17 19 22 24 27 30 IN 19 5 6 7 8 10 12 14 IS 19 8 10 IKS 19 2 3 1990-5 -10 1995	4.6	1
6140090	D 19 IMU-10 U-10T 1993 U-10T D 19 10 11 12 13 14 15 17 19 22 24 27 30 IN 19 5 6 7 8 10 12 14 IS 19 8 10 IKS 19 2 3 1990-5 -10 1995	4.4	1

19 C / D 19 C

SOCKET SET 1/2" 29 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 525 x 203 x 50 mm

12.5

1/2"



Code	No.		
6172530	19 CMU-10 U-10T 1993 U-10T 19 10 11 12 13 14 15 16 17 18 19 21 22 2 10x11 12x13 14x15 16x17 18x21 19x22 6 10x11 12x13 14x15 16x17 18x21 19x22 1987 1990-5 -10 1995	6.6	1
6172610	D 19 CMU-10 U-10T 1993 U-10T D 19 10 11 12 13 14 15 16 17 18 19 21 22 2 10x11 12x13 14x15 16x17 18x21 19x22 6 10x11 12x13 14x15 16x17 18x21 19x22 1987 1990-5 -10 1995	6.6	1

19 LM

SOCKET SET 1/2" 30 pieces
 In GEDORIT blue sheet steel case
 Dimensions: 433 x 180 x 48 mm

12.5

1/2"



Code	No.		
1806033	19 LMU-10 U-10T 1993 U-10T 19 10 11 12 13 14 15 16 17 18 19 21 22 24 27 30 32 19 L 10 12 13 14 15 17 19 50 MH (20,8) 54 (16) 1987 1990-5 -10 1995	6.2	1





D 19 X

- SOCKET SET 1/2" 31 pieces**
 In GEDORIT blue sheet steel case
 Dimensions: 433 x 180 x 48 mm

12.5

1/2"



Code	No.		
6149390	D 19 XMAZ Z-94 1993 Z-94 D 19 11 13 14 17 19 22 24 27 30 32 D 19 3/8 13/32 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1" 1.1/16 1.1/8" 1987 1990-5 -10 1995	5.8	1
6149470	D 19 XMAU-10 U-10T 1993 U-10T D 19 11 13 14 17 19 22 24 27 30 32 D 19 3/8 13/32 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1" 1.1/16 1.1/8" 1987 1990-5 -10 1995	5.8	1



D 19 Y

- SOCKET SET 1/2" 41 pieces**
 In GEDORIT blue sheet steel case
 Dimensions: 525 x 203 x 50 mm

12.5

1/2"



Code	No.		
6149710	D 19 YMAWZ Z-94 1993 Z-94 D 19 10 11 12 13 14 15 16 17 18 19 20 21 22 D 19 L 21 D 19 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 7/8 15/16 1" 3/4 W D 19 3/16 1/4 5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 W 1985 1990-5 -10 1987 1995	7.2	1
6149980	D 19 YMAWU-10 U-10T 1993 U-10T D 19 10 11 12 13 14 15 16 17 18 19 20 21 22 D 19 L 21 D 19 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 7/8 15/16 1" 3/4 W D 19 3/16 1/4 5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 W 1985 1990-5 -10 1987 1995	7.3	1

19 V20U-10

- SOCKET SET 1/4" + 1/2" 50 pieces**
 In GEDORIT blue sheet steel case
 Dimensions: 525 x 203 x 50 mm

12.5

1/2"

6.3

1/4"



Code	No.		
6157490	19 V20U-10 U-10T 1993 U-10T U-3 2093 U-3 O 19 10 11 12 13 14 15 17 19 22 24 27 30 IN 19 7 8 10 12 14 IS 19 8 10 IKS 19 3 O 20 4 4,5 5 5,5 6 7 8 9 10 11 13 IN 20 3 4 5 6 IS 20 4 5,5 6,5 IKS 20 1 2 1990-5 -10 1995 2098 2090-2 -4 2087 2095	5.0	1

IN 19 P

SCREWDRIVER BIT SOCKET SET 1/2" 9 pieces

- For in-hex screws (INBUS*)
 In GEDORIT blue sheet steel case
 Dimensions: 281 x 79 x 35 mm
 INBUS* = reg. trademark of Acument GmbH & Co. OHG, 56567 Neuwied

12.5

1/2"



Code	No.		
6156250	IN 19 PM IN 19 5 6 7 8 9 10 12 14 17	820	1
6156410	IN 19 PA IN 19 3/16 7/32 1/4 9/32 5/16 3/8 1/2 9/16 5/8"	815	1

IN 19 Q

SCREWDRIVER BIT SOCKET SET 1/2" 11 pieces

- For in-hex screws (INBUS*)
 In GEDORIT blue sheet steel case
 Dimensions: 318 x 118 x 50 mm
 INBUS* = reg. trademark of Acument GmbH & Co. OHG, 56567 Neuwied

12.5

1/2"



Code	No.		
6156920	IN 19 Q U-10T 1993 U-10T IN 19 5 6 7 8 9 10 12 14 17 1990-7	2.5	1

IN 19 LKM

SCREWDRIVER BIT SOCKET SET

1/2" 15 pieces

- For in-hex screws (INBUS®), short and long
- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm
- INBUS® = reg. trademark of Acument GmbH & Co. OHG, 56567 Neuwied



12,5

1/2"



Code	No.		
6129360	IN 19 LKM	1.9	1
	● IN 19 5 6 7 8 9 10 12 14 17		
	● IN 19 L 5-90 6-90 8-90 10-140 12-140 14-140		

INX 19 P

SCREWDRIVER BIT SOCKET SET 1/2" 9 pieces

- For slotted, cross-head and multi-point screws
- In GEDORIT blue sheet steel case
- Dimensions: 281 x 79 x 35 mm



12,5

1/2"



Code	No.		
6150050	INX 19 PM	2.5	1
	● INX 19 5 6 8 10 12		
	⊕ IK5 19 2 3 ⊖ IS 19 12 16		

ITX 19 PM - ITX 19 B-PM

SCREWDRIVER BIT SOCKET SET 1/2" 9 pieces

- ITX 19 PM: for recessed TORX® head screws
- ITX 19 B-PM: for recessed TORX® head screws with pilot
- In GEDORIT blue sheet steel case
- Dimensions: 281 x 79 x 35 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



12,5

1/2"



Code	No.		
6158970	ITX 19 PM	2.5	1
	● ITX 19 T20 T25 T27 T30 T40 T45 T50 T55 T60		
1394894	ITX 19 B-PM	2.5	1
	● ITX 19 B T20 T25 T27 T30 T40 T45 T50 T55 T60		

ITX 19 LKP

SCREWDRIVER BIT SOCKET SET

1/2" 18 pieces

- For recessed TORX® screws, short and long
- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



12,5

1/2"



Code	No.		
6138510	ITX 19 LKP	1.9	1
	● ITX 19 T20 T25 T27 T30 T40 T45 T50 T55 T60		
	● ITX 19 L T20 T25 T27 T30 T40 T45 T50 T55 T60		

ITX 19 TX-017

SCREWDRIVER BIT SOCKET SET 1/2" 17 pieces

- For protruding and recessed TORX® screws
- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



12,5

1/2"



Code	No.		
6129520	ITX 19 TX-017	2.0	1
	● ITX 19 T20 T25 T27 T30 T40 T45 T50 T55 T60		
	⊙ TX 19 E10 E11 E12 E14 E16 E18 E20 E24		

TX 19 E-09

SCREWDRIVER BIT SOCKET SET 1/2" 9 pieces

- For protruding TORX® screws
- In GEDORIT blue sheet steel case
- Dimensions: 281 x 79 x 35 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



12,5

1/2"



Code	No.		
6265970	TX 19 E-09	0.9	1
	⊙ TX 19 E10 E11 E12 E14 E16 E18 E20 E24		
	3019		

19 TX 20

SCREWDRIVER BIT SOCKET SET 1/2" 34 pieces

- 1/2" and 1/4" sockets for protruding and recessed TORX® screws
- In GEDORIT blue sheet steel case
- Dimensions: 320 x 210 x 55 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



6,3

1/4"

12,5

1/2"



Code	No.		
6129440	19 TX 20	3.2	1
	● ITX 19 T40 T45 T50 T55 T60		
	● ITX 19 LT20 T25 T27 T30 T40 T45 T50 T55 T60		
	⊙ TX 19 E12 E14 E16 E18 E20 E24		
	● ITX 20 T8 T9 T10 T15 T20 T25 T27 T30		
	⊙ TX 20 E4 E5 E6 E7 E8 E10		



ITX 19-20-30 T

SCREWDRIVER BIT SOCKET SET 1/2" 10 pieces

- 1/4", 3/8" and 1/2" sockets for recessed TORX® screws
- In plastic case
- Dimensions: 200 x 120 x 38 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.		
6173500	ITX 19-20-30 T	0.8	1
	10x ITX 20 T8 T10 T15		
	10x ITX 30 T20 T25 T30		
	10x ITX 19 T40 T50 T55 T60		

VB 19 M - VBD 19 M

DISPLAY BOX 1/2" 192 pieces

- With 192 1/2" sockets
- Supplied with empty insert (EI-VBE 19 L)
- Display box empty (VB 19 L) in GEDORIT silver sheet steel
- Dimensions: 430 x 300 x 220 mm



Code	No.		
6152340	VB 19 M	23.0	1
	S VB 19 M + VB 19 L + EI-VBE 19 L		
1888021	S VB 19 M	17.0	1
	O 19		
	10x 8 9 10 11 12 13 14		
	8x 15 16 17 18 19 20 21 22 23 24		
	6x 25 26 27 28 29 30 32		
6152260	VBD 19 M	23.0	1
	S VBD 19 M + VB 19 L + EI-VBE 19 L		
1888048	S VBD 19 M	17.0	1
	D 19		
	10x 8 9 10 11 12 13 14		
	8x 15 16 17 18 19 20 21 22 23 24		
	6x 25 26 27 28 29 30 32		
5152720	VB 19 L	6.0	1
5151080	EI-VBE 19 L	0.1	1

VBI 19 M

DISPLAY BOX 1/2" 152 pieces

- With 152 1/2" screwdriver bit sockets
- Supplied with empty insert (EI-VBE 19 L)
- Display box empty (VBI 19 L) in GEDORIT silver sheet steel
- Dimensions: 430 x 300 x 220 mm



Code	No.		
6152180	VBI 19 M	28.0	1
	S VBI 19 M + VBI 19 L + EI-VBE 19 L		
1888056	S VBI 19 M	24.0	1
	10x IN 19 6 8 10		
	8x IN 19 5 12 14		
	5x IN 19 4 7 9 17 19		
	5x IS 19 8 10 12		
	3x IS 19 14 16 18		
	5x IKS 19 2 3 4		
	3x IKS 19 PZD 2 3 4		
	5x INX 19 5 6 8 10 12		
5152480	VBI 19 L	9.2	1
5151080	EI-VBE 19 L	0.1	1

VBTX 19

DISPLAY BOX 1/2" 185 pieces

- With 185 protruding and recessed 1/2" TORX® sockets
- Display box empty (VBTX 19 L) in GEDORIT silver sheet steel
- Dimensions: 413 x 275 x 165 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.		
6194260	VBTX 19	20.0	1
	S VBTX 19 + VBTX 19 L		
1888064	S VBTX 19	19.0	1
	10x ITX 19 T20 T25 T27 T30 T40 T45		
	10x TX 19 E10 E11 E12 E14 E16		
	5x ITX 19 T50 T55 T60		
	5x ITX 19 L T20 T25 T27 T30 T40 T45 T50 T55 T60		
	5x TX 19 E18 E20 E24		
6160010	VBTX 19 L	5.3	1

VBE 19 INL

DISPLAY INSERT WITH ASSORTMENT 1/2" 75 pieces

- Includes 75 1/2" screwdriver bit sockets
- Also suitable for VB 19, VBI 19
- Dimensions: 430 x 150 x 35 mm
- EI-VBE 19 L = empty insert



Code	No.		
6157220	VBE 19 INL	10.5	1
	5x IN 19 L 5-90 5-180 6-90 6-140 6-160 7-100		
	8-90 8-120 10-140 12-140 14-140		
	5x INX 19 L 6-100 8-100 10-100 12-100		
5151080	EI-VBE 19 L	0.1	1



20 MM (3/4") SQUARE DRIVE

20 3/4" 20 3/4"

SOCKETS 20 MM (3/4")



3/4"

32


SOCKET 3/4" hexagon

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - D 20, ISO 1174, with locking pin
- Hand-operated, chrome-plated, ground
- * not standardised

20

3/4"

○



Code	No.	*	mm	L	d ₁	d ₂	t	±	1
6269880	32 18	*	18	51.5	28.3	36.0	19.0	230	1
6270110	32 19	*	19	51.5	29.6	36.0	19.0	120	1
6269960	32 21		21	51.5	32.0	36.0	19.0	240	1
6270380	32 22		22	51.5	33.3	36.0	19.0	160	1
6270460	32 24		24	51.5	35.8	38.0	19.5	180	1
6270540	32 27		27	54.5	39.6	36.0	24.0	250	1
6270620	32 29	*	29	54.5	42.0	36.0	23.5	280	1
6270700	32 30		30	57.5	43.3	38.0	26.0	350	1
6270890	32 32		32	57.5	45.8	38.0	27.0	380	1
6270030	32 33	*	33	57.5	47.0	40.0	26.5	400	1
6279410	32 34		34	57.5	48.3	40.0	26.5	410	1
6270970	32 36		36	59.5	50.8	40.0	28.0	450	1
6271000	32 38	*	38	59.5	53.3	40.5	28.0	460	1
6271190	32 41		41	62.5	57.1	44.0	30.5	500	1
6271270	32 46		46	65.5	63.3	44.0	32.5	570	1
6271350	32 50		50	68.5	68.3	48.0	34.5	650	1
6271430	32 55		55	68.5	74.6	53.0	33.0	750	1
6271510	32 60		60	68.5	80.8	53.0	33.0	850	1

D 32


SOCKET 3/4" UD profile

- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - D 20, ISO 1174, with locking pin
- Hand-operated, chrome-plated, ground
- * not standardised

20

3/4"

UNIT DRIVE



Code	No.	*	mm	L	d ₁	d ₂	t	±	1
6289720	D 32 18	*	18	51.5	28.3	36.0	19.0	215	1
6272160	D 32 19	*	19	51.5	29.6	36.0	19.0	120	1
6289800	D 32 21		21	51.5	32.0	36.0	19.0	225	1
6272240	D 32 22		22	51.5	33.3	36.0	19.0	150	1
6272320	D 32 24		24	51.5	35.8	38.0	19.5	180	1
6272400	D 32 27		27	54.5	39.6	36.0	24.0	250	1
6272590	D 32 29	*	29	54.5	42.0	36.0	23.5	280	1
6272670	D 32 30		30	57.5	43.3	38.0	26.0	350	1
6272750	D 32 32		32	57.5	45.8	38.0	27.0	380	1
6277040	D 32 33	*	33	57.5	47.0	40.0	26.5	400	1
6272830	D 32 36		36	59.5	50.8	40.0	28.0	450	1
6272910	D 32 38	*	38	59.5	53.3	40.5	28.0	460	1
6273050	D 32 41		41	62.5	57.1	44.0	30.5	500	1
6273130	D 32 46		46	65.5	63.3	44.0	32.5	570	1
6273210	D 32 50		50	68.5	68.3	48.0	34.5	650	1
6273480	D 32 55		55	68.5	74.6	53.0	33.0	750	1
6273560	D 32 60		60	68.5	80.8	53.0	33.0	850	1

Code	No.	AF	L	d ₁	d ₂	t	±	1
6274020	D 32 7/8AF	7/8	51.5	33.6	36.0	19.0	150	1
6274100	D 32 15/16AF	15/16	51.5	35.6	38.0	19.5	180	1
6274290	D 32 1AF	1	51.5	37.6	36.0	22.0	200	1
6274370	D 32 1.1/16AF	1.1/16	54.5	39.6	36.0	24.0	250	1
6274450	D 32 1.1/8AF	1.1/8	54.5	41.5	36.0	24.0	280	1
6274530	D 32 1.1/4AF	1.1/4	57.5	45.5	38.0	27.0	380	1
6274610	D 32 1.5/16AF	1.5/16	57.5	47.5	40.0	26.5	400	1
6274880	D 32 1.3/8AF	1.3/8	59.5	49.5	40.0	28.0	420	1
6274960	D 32 1.7/16AF	1.7/16	59.5	51.4	40.0	28.0	450	1
6275180	D 32 1.1/2AF	1.1/2	59.5	53.3	40.5	28.0	460	1
6275260	D 32 1.5/8AF	1.5/8	62.5	57.4	44.0	30.5	500	1
6275340	D 32 1.11/16AF	1.11/16	62.5	59.4	44.0	30.5	530	1
6275420	D 32 1.3/4AF	1.3/4	65.5	61.4	44.0	32.5	550	1
6275500	D 32 1.13/16AF	1.13/16	65.5	63.3	44.0	32.5	570	1
6275690	D 32 1.7/8AF	1.7/8	65.5	65.3	44.0	32.5	600	1
6275770	D 32 2AF	2	68.5	69.2	48.0	34.5	650	1

IN 32


SCREWDRIVER BIT SOCKET 3/4" for in-hex screws

- Acc. to DIN 7422
- Square drive as per DIN 3120 - D 20, ISO 1174, with locking pin
- Hand-operated, chrome-plated
- With pressed-in pin, bit manganese-phosphated

20

3/4"

●



Code	No.	mm	L ₁	L ₂	d	±	1
6275850	IN 32 14	14	80	25.5	38	200	1
6275930	IN 32 17	17	80	25.5	38	200	1
6276070	IN 32 19	19	80	25.5	38	300	1
6276150	IN 32 22	22	80	25.5	38	300	1

IN 32 L


SCREWDRIVER BIT SOCKET 3/4" long, for in-hex screws

- Acc. to DIN 7422
- Square drive as per DIN 3120 - D 20, ISO 1174, with locking pin
- Hand-operated, chrome-plated
- With pressed-in pin, bit manganese-phosphated

20

3/4"

●



Code	No.	mm	L ₁	L ₂	d	±	1
2003503	IN 32 L 14-155	14	155	100	38	1	1
1353705	IN 32 L 17-155	17	155	100	38	1	1
2003511	IN 32 L 19-155	19	155	100	38	1	1
2003538	IN 32 L 22-155	22	155	100	38	1	1

ITX 32


SCREWDRIVER BIT SOCKET 3/4" for recessed TORX® head screws

- Square drive as per DIN 3120 - D 20, ISO 1174, with locking pin
- Hand-operated, chrome-plated
- With pressed-in pin, bit gun-metal finished
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

20

3/4"

★



Code	No.		 M	 mm	L ₁	L ₂	d		
6271780	ITX 32 T60	T60	M14	13.25	80	25.5	38	325	1
6272080	ITX 32 T70	T70	M16	15.55	80	25.5	38	340	1
6273640	ITX 32 T80	T80	M18	17.58	80	25.5	38	360	1
6276230	ITX 32 T90	T90	M20	19.95	80	25.5	38	380	1
6276310	ITX 32 T100	T100	M22	21.16	80	25.5	38	395	1



RATCHETS 20 MM (3/4")

3293 U-10

REVERSIBLE RATCHET 3/4"

- Acc. to DIN 3122, ISO 3315
- With lever change, locks in middle position
- Push-fit tube handle
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174, with locking pin

20
3/4"



Code	No.	□"	□	□"	□	□"	□	□"	□
6277980	3293 U-10	3/4	20	11,25	620	57.5	2400	1	



3293 U-2

REVERSIBLE RATCHET 3/4"

- Acc. to DIN 3122, ISO 3315
- With disc change, fine-toothed and robust
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174, with locking pin

20
3/4"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278600	3293 U-2	3/4	20	7,2	510	60	1250	1	

3293 U-3

REVERSIBLE RATCHET 3/4"

- Acc. to DIN 3122, ISO 3315
- With non-slip metal disc change, fine-toothed and robust
- Push-fit tube handle
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174, with locking pin


20
3/4"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278790	3293 U-3	3/4	20	5	620	62.5	2200	1	

3293 Z-94

RATCHET HANDLE WITH COUPLER 3/4"

- Acc. to DIN 3122, ISO 3315
- With square coupler, medium-fine toothed, extremely rugged
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174, with locking pin

20
3/4"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278950	3293 Z-94	3/4	20	10	510	31.0	1300	1	

ACCESSORIES 20 MM (3/4")

3219

REDUCER 3/4" TO 1/2"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin
- Load capacity max. 512 N-m

20
3/4"
12.5
1/2"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278010	3219	3/4	20	1/2	12.5	56	150	1	

3221

CONVERTOR 3/4" TO 1"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

20
3/4"
25
1"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278280	3221	3/4	20	1	25	60	300	1	

3287

SLIDING T BAR 3/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

20
3/4"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278360	3287	3/4	20		500	1150	1		

3290

EXTENSION 3/4"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

20
3/4"


Code	No.	□"	□	□"	□	□"	□	□"	□
6278440	3290-8	3/4	20		200	600	1		
6278520	3290-16	3/4	20		400	1100	1		

3294

COUPLER 3/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

20
3/4"


Code	No.	□"	□	□"	□	□"	□	□"	□
6279090	3294	3/4	20		51.5	100	1		

3295
UNIVERSAL JOINT 3/4"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

20
3/4"


Code	No.	■"	■	□"	□	mm	mm	mm
6279170	3295	3/4	20	3/4	20	108	550	1

3296
SWIVEL HANDLE 3/4"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

20
3/4"


Code	No.	■"	■	mm	mm	mm
6279250	3296	3/4	20	547	1950	1

Detailed information on products, promotions and trade fairs

... www.gedore.com


SETS 20 MM (3/4")
20
3/4"
32 E / D 32 E
SOCKET SET 3/4" 14 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 525 x 203 x 73 mm

20
3/4"


Code	No.	mm	mm
6280180	32 EMZ Z-94 3293 Z-94 O 32 22 24 27 30 32 36 38 41 46 50 3287 3290-8 -16	11.4	1
6280340	32 EMU-2 U-2 3293 U-2 O 32 22 24 27 30 32 36 38 41 46 50 3287 3290-8 -16	11.5	1
6280260	D 32 EMZ Z-94 3293 Z-94 D 32 22 24 27 30 32 36 38 41 46 50 3287 3290-8 -16	10.3	1
6280420	D 32 EMU-2 U-2 3293 U-2 D 32 22 24 27 30 32 36 38 41 46 50 3287 3290-8 -16	10.3	1
6280500	D 32 EAZ Z-94 3293 Z-94 D 32 15/16 1.1/16 1.1/8 1.1/4 1.5/16 1.3/8 1.1/2 1.5/8 1.7/8 2" 3287 3290-8 -16	10.3	1
6280690	D 32 EAU-2 U-2 3293 U-2 D 32 15/16 1.1/16 1.1/8 1.1/4 1.5/16 1.3/8 1.1/2 1.5/8 1.7/8 2" 3287 3290-8 -16	10.3	1

D 32 EMAU-2
SOCKET SET 3/4" 25 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 660 x 230 x 80 mm

20
3/4"


Code	No.	mm	mm
6281310	D 32 EMAU-2 U-2 3293 U-2 D 32 22 24 27 30 32 36 41 46 50 D 32 7/8 15/16 1" 1.1/16 1.1/8 1.1/4 1.5/16 1.3/8 1.1/2 1.1/16 1.7/8 2" 3287 3290-8 -16	18.0	1


32 FM / D 32 FM
SOCKET SET 3/4" 16 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 555 x 230 x 80 mm

20
3/4"


Code	No.	mm	mm
6280930	32 FMZ Z-94 3293 Z-94 O 32 22 24 27 30 32 36 38 41 46 50 55 60 3287 3290-8 -16	15.6	1
6281150	32 FMU-2 U-2 3293 U-2 O 32 22 24 27 30 32 36 38 41 46 50 55 60 3287 3290-8 -16	15.8	1
6281070	D 32 FMZ Z-94 3293 Z-94 D 32 22 24 27 30 32 36 38 41 46 50 55 60 3287 3290-8 -16	14.5	1
6281230	D 32 FMU-2 U-2 3293 U-2 D 32 22 24 27 30 32 36 38 41 46 50 55 60 3287 3290-8 -16	14.5	1



25 (1") SQUARE DRIVE

25 1" 25 1"

SOCKETS 25 (1")

D 21

SOCKET 1" UD profile or bi-hexagon


- Acc. to DIN 3124, ISO 2725-1
- Square drive as per DIN 3120 - D 25, ISO 1174, with locking pin
- Metric sizes with UD profile, double hex imperial and Whitworth
- Hand-operated, chrome-plated, ground
- * not standardised

25

1"

1"

1"



Code	No. G ₁	*	mm	L	d ₁	d ₂	t	mm	mm
6174900	D 21 36	*	36	70.0	53.9	48.0	30.0	650	1
6175040	D 21 41		41	70.0	60.1	50.0	30.5	750	1
6175120	D 21 46		46	75.0	66.4	50.0	33.5	900	1
6175200	D 21 50		50	75.0	71.4	50.0	35.0	1000	1
6175390	D 21 55		55	80.0	77.6	50.0	37.5	1100	1
6175470	D 21 60		60	85.0	83.9	50.0	41.0	1400	1
6175550	D 21 65		65	88.0	90.1	59.5	44.5	1600	1
6175630	D 21 70		70	92.0	96.4	59.5	48.0	1750	1
6175710	D 21 75		75	95.0	102.6	59.5	51.0	2100	1
6175980	D 21 80		80	97.0	108.9	59.5	54.0	2300	1

Code	No. O	mm	L	d ₁	d ₂	t	mm	mm
6176440	D 21 1.7/16AF	1.7/16	70.0	54.5	48.0	30.0	650	1
6176520	D 21 1.1/2AF	1.1/2	70.0	56.5	48.0	30.0	700	1
6176600	D 21 1.5/8AF	1.5/8	70.0	60.1	50.0	30.5	750	1
6176870	D 21 1.13/16AF	1.13/16	75.0	66.4	50.0	33.5	900	1
6176950	D 21 1.7/8AF	1.7/8	75.0	68.4	50.0	33.5	950	1
6177090	D 21 2AF	2	75.0	72.4	50.0	35.0	1000	1
6177170	D 21 2.1/16AF	2.1/16	75.0	74.0	50.0	35.0	1050	1
6177250	D 21 2.3/16AF	2.3/16	80.0	78.3	50.0	37.5	1100	1
6177330	D 21 2.1/4AF	2.1/4	80.0	80.3	50.0	37.5	1150	1
6177410	D 21 2.3/8AF	2.3/8	85.0	83.9	50.0	41.0	1400	1
6177680	D 21 2.7/16AF	2.7/16	85.0	86.2	50.0	41.0	1450	1
6177760	D 21 2.9/16AF	2.9/16	88.0	90.1	59.5	44.5	1600	1
6177840	D 21 2.5/8AF	2.5/8	88.0	92.2	59.5	44.5	1650	1
6177920	D 21 2.3/4AF	2.3/4	92.0	96.4	59.5	48.0	1750	1
6178060	D 21 2.13/16AF	2.13/16	92.0	98.2	59.5	48.0	1850	1
6178140	D 21 2.15/16AF	2.15/16	95.0	102.6	59.5	51.0	2100	1
6178220	D 21 3AF	3	95.0	104.1	59.5	51.0	2200	1
6178300	D 21 3.1/8AF	3.1/8	97.0	108.9	59.5	54.0	2300	1

Code	No. O	mm	L	d ₁	d ₂	t	mm	mm
6178650	D 21 7/8W	7/8	70.0	55.8	48.0	30.0	700	1
6178730	D 21 15/16W	15/16	70.0	58.6	50.0	30.0	750	1
6178810	D 21 1W	1	70.0	61.9	50.0	30.5	800	1
6179030	D 21 1.1/8W	1.1/8	75.0	67.9	50.0	33.5	950	1
6179110	D 21 1.1/4W	1.1/4	75.0	74.0	50.0	35.0	1050	1
6179380	D 21 1.3/8W	1.3/8	80.0	79.3	50.0	37.5	1150	1
6179460	D 21 1.1/2W	1.1/2	85.0	85.1	50.0	41.0	1450	1
6179540	D 21 1.5/8W	1.5/8	88.0	90.8	59.5	44.5	1600	1
6179620	D 21 1.3/4W	1.3/4	92.0	96.4	59.5	48.0	1750	1
6179700	D 21 2W	2	97.0	108.9	59.5	54.0	2300	1

IN 21


SCREWDRIVER BIT SOCKET 1" for in-hex screws

- Acc. to DIN 7422
- Square drive as per DIN 3120 - D 25, ISO 1174, with locking pin
- Hand-operated, chrome-plated
- With pressed-in pin, bit manganese-phosphated
- * not standardised

25

1"

1"



Code	No.	*	mm	L ₁	L ₂	d	mm	mm
6181010	IN 21 17		17	90	25.5	48	300	1
6181280	IN 21 19		19	90	25.5	48	300	1
6181360	IN 21 22		22	90	25.5	48	400	1
6181440	IN 21 24		24	90	25.5	48	400	1
6200680	IN 21 27	*	27	90	25.5	48	850	1

RATCHETS 25 (1")


2193 U-10

REVERSIBLE RATCHET 1"

- Acc. to DIN 3122, ISO 3315
- With lever change, locks in middle position
- Push-fit bar handle no. 2187 G
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 25, ISO 1174, with locking pin

25

1"



Code	No.	mm	mm	mm	mm	mm	mm
6180550	2193 U-10 complete	1	25	11,25	810	61.5	5210
6196120	2193 U-10 K head only	1	25		184	61.5	1980
6195900	2187 G tommy bar				700		3230


2193 U-3

REVERSIBLE RATCHET 1"

- Acc. to DIN 3122, ISO 3315
- With non-slip metal disc change, fine-toothed and robust
- Push-fit tube handle
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 25, ISO 1174, with locking pin

25


1"



Code	No.	mm	mm	mm	mm	mm	mm
6180630	2193 U-3 complete	1	25	5	720	76	4160
1637487	E-2193 U-3 K head only	1	25				2000
1382500	E-2193 Z/17 tube						2160

2193 Z-94
RATCHET HANDLE WITH COUPLER 1"

- Acc. to DIN 3122, ISO 3315
- With square coupler, medium-fine toothed, extremely rugged
- Push-fit tube handle
- For hand-operated sockets and accessories with square drive as per DIN 3120 - D 25, ISO 1174, with locking pin

25
1"


Code	No.	■"	■	∠°	↳mm↳	↳	↳	↳
6181520	2193 Z-94 complete	1	25	9	720	41	4115	1
1493779	E-2193 Z K head only	1	25				1955	
1382500	E-2193 Z/17 tube						2160	1

ACCESSORIES 25 (1")
2132
REDUCER 1" TO 3/4"


- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin
- Load capacity max. 1412 N·m

25
1"
20
3/4"


Code	No.	□"	□	■"	■	↳mm↳	↳	↳
6180040	2132	1	25	3/4	20	75	500	1

2187
SLIDING T BAR 1"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

25
1"


Code	No.	■"	■	↳mm↳	↳	↳
6180120	2187 complete	1	25	700	3950	1
6196040	2187 K drive piece	1	25	80	700	1
6195900	2187 G tommy bar			700	3230	1


2190
EXTENSION 1"

- Acc. to DIN 3123, ISO 3316
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

25
1"


Code	No.	■"	■	↳mm↳	↳	↳
6180200	2190-8	1	25	200	1150	1
6180390	2190-16	1	25	400	1900	1

2194
COUPLER 1"

- Acc. to DIN 3122, ISO 3315
- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

25
1"


Code	No.	■"	■	↳mm↳	↳	↳
6180710	2194	1	25	67.5	300	1

2195
UNIVERSAL JOINT 1"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174, with locking pin

25
1"


Code	No.	■"	■	□"	□	↳mm↳	↳	↳
6180980	2195	1	25	1	25	140	1400	1

SETS 25 (1")
25
1"
D 21 E
SOCKET SET 1" 15 pieces

- In GEDORIT blue sheet steel case
- Dimensions: 765 x 289 x 105 mm

25
1"


Code	No.	↳	↳
6181600	D 21 EMU-10 U-10 K 2193 U-10 K D 21 36 41 46 50 55 60 65 70 75 80 2190-8 -16 2187 G 2187 K	36.7	1
6181790	D 21 EAU-10 U-10 K 2193 U-10 K D 21 1.1/2 1.5/8 1.7/8 2" 2.1/16 2.1/4 2.3/8 2.9/16 2.3/4 3" AF 2190-8 -16 2187 G 2187 K	34.9	1
6181870	D 21 EWU-10 U-10 K 2193 U-10 K D 21 7/8 15/16 1" 1.1/8 1.1/4 1.3/8 1.1/2 1.5/8 1.3/4 2" W 2190-8 -16 2187 G 2187 K	34.9	1




FRICION TYPE RATCHETS

31 KR

FRICION TYPE RATCHET with ring UD profile or bi-hexagon

- Friction spanner (31 K) with exchangeable UD profile or bi-hexagon insert rings (31 R)
- Hexagon rings are available on request
- Flat shaft up to 30"; push-fit tube handle from 35"
- GEDORE vanadium steel 31CrV3, manganese-phosphated
- Explanation of the article number: 31 KR 16-32 = ratchet 31 K 16" and insert ring 31 R 32 mm



Code	No.	Ø mm	L	L"	h	b	Wt	Wt
6253020	31 KR 6-8	8	150	6	11.5	23.0	90	1
6253100	31 KR 6-9	9	150	6	11.5	23.0	90	1
6253290	31 KR 6-10	10	150	6	11.5	23.0	90	1
6253370	31 KR 6-11	11	150	6	11.5	23.0	90	1
6253450	31 KR 6-12	12	150	6	11.5	23.0	90	1
6253530	31 KR 6-13	13	150	6	11.5	23.0	90	1
6253610	31 KR 8-14	14	205	8	15.5	31.2	220	1
6253880	31 KR 8-15	15	205	8	15.5	31.2	220	1
6253960	31 KR 8-16	16	205	8	15.5	31.2	220	1
6254180	31 KR 8-17	17	205	8	15.5	31.2	220	1
6254260	31 KR 10-18	18	255	10	17.5	38.0	370	1
6254340	31 KR 10-19	19	255	10	17.5	38.0	370	1
6254500	31 KR 10-21	21	255	10	17.5	38.0	370	1
6254690	31 KR 10-22	22	255	10	17.5	38.0	370	1
6254770	31 KR 10-23	23	255	10	17.5	38.0	370	1
6254850	31 KR 12-24	24	305	12	18.5	44.6	480	1
6255070	31 KR 12-26	26	305	12	18.5	44.6	480	1
6255150	31 KR 12-27	27	305	12	18.5	44.6	480	1
6255230	31 KR 12-28	28	305	12	18.5	44.6	480	1
6255580	31 KR 16-30	30	400	16	19.5	51.6	720	1
6255740	31 KR 16-32	32	400	16	19.5	51.6	720	1
6262600	31 KR 20-34	34	500	20	21.5	63.6	1200	1
6256120	31 KR 20-36	36	500	20	21.5	63.6	1250	1
6256470	31 KR 20-41	41	500	20	21.5	63.6	1250	1
6256550	31 KR 25-46	46	635	25	31.5	78.1	2500	1
6256630	31 KR 25-50	50	635	25	31.5	78.1	2500	1
6256710	31 KR 30-55	55	760	30	33.5	92.0	3050	1
6256980	31 KR 30-60	60	760	30	33.5	92.0	3050	1
6257010	31 KR 35-65	65	940	35	36.5	105.0	5000	1
6257280	31 KR 35-70	70	940	35	36.5	105.0	5000	1
6257360	31 KR 40-75	75	960	40	39.5	118.0	5900	1
6257440	31 KR 40-80	80	960	40	39.5	118.0	5900	1
6257520	31 KR 45-85	85	1150	45	46.0	133.0	10100	1
6257600	31 KR 45-90	90	1150	45	46.0	133.0	10100	1
6257790	31 KR 55-95	95	1400	55	55.0	160.0	18400	1
6257870	31 KR 55-100	100	1400	55	55.0	160.0	18400	1
6257950	31 KR 55-105	105	1400	55	55.0	160.0	18400	1
6258090	31 KR 60-110	110	1500	60	57.0	169.0	19800	1
6258170	31 KR 60-115	115	1500	60	57.0	169.0	19800	1




Deviant packing units see article description.

31 KVR

FRICION TYPE RATCHET with square ring

- Friction spanner (31 K) with exchangeable square insert rings (31 VR)
- GEDORE vanadium steel 31CrV3, manganese-phosphated
- Explanation of the article number: 31 KVR 8-12 = ratchet 31 K 8" and insert ring 31 VR 12 mm



Code	No.	Ø mm	L	L"	h	b	Wt	Wt
6266000	31 KVR 6-8	8	150	6	11.5	23.0	90	1
6266190	31 KVR 6-9	9	150	6	11.5	23.0	90	1
6266270	31 KVR 6-10	10	150	6	11.5	23.0	90	1
6266350	31 KVR 6-11	11	150	6	11.5	23.0	90	1
6266430	31 KVR 8-12	12	205	8	15.5	31.2	220	1
6266780	31 KVR 8-14	14	205	8	15.5	31.2	220	1
6267080	31 KVR 10-17	17	255	10	17.5	38.0	370	1
6267240	31 KVR 10-19	19	255	10	17.5	38.0	370	1

31 K

FRICION RATCHET HANDLE WITHOUT INSERT RING

- Friction spanner for insert rings 31 R and 31 VR
- GEDORE vanadium steel 31CrV3, manganese-phosphated



Code	No.	Ø Ring	Ø Ring	L	L"	Head Ø	Wt	Wt
6243060	31 K 6	8-13	8-11	150	6	20	60	1
6243140	31 K 8	14-17	12-14	205	8	28	180	1
6243220	31 K 10	18-23	17-19	255	10	34	310	1
6243300	31 K 12	24-28		305	12	40	410	1
6243490	31 K 16	30-32		400	16	46	890	1
6243570	31 K 20	34-41		500	20	57	1020	1
6243650	31 K 25	46-50		635	25	70	2200	1
6243730	31 K 30	55-60		760	30	82	2600	1
6243810	31 K 35	65-70		940	35	96	4500	1
6244030	31 K 40	75-80		960	40	108	5300	1
6244110	31 K 45	85-90		1150	45	120	9000	1
6244460	31 K 55	95-105		1400	55	145	16400	1
6244540	31 K 60	110-115		1500	60	153	17100	1

31 R

INSERT RING FOR FRICION RATCHET UD profile or bi-hexagon

- GEDORE vanadium steel 31CrV3, manganese-phosphated



Code	No.		Ø	Ø				
6245000	31 R 8		8	19.7		6	30	1
6245190	31 R 9		9	19.7	6	30	1	
6245270	31 R 10		10	19.7	6	30	1	
6245350	31 R 11		11	19.7	6	30	1	
6245430	31 R 12		12	19.7	6	30	1	
6245510	31 R 13		13	19.7	6	30	1	
6245780	31 R 14		14	27.6	8	40	1	
6245860	31 R 15		15	27.6	8	40	1	



Code	No.	Ø	Ø	mm	mm	mm
6245940	31 R 16	16	27.6	8	40	1
6246080	31 R 17	17	27.6	8	40	1
6246160	31 R 18	18	33.6	10	60	1
6246240	31 R 19	19	33.6	10	60	1
6246400	31 R 21	21	33.6	10	60	1
6246590	31 R 22	22	33.6	10	60	1
6246670	31 R 23	23	33.6	10	60	1
6246750	31 R 24	24	39.6	12	70	1
6246910	31 R 26	26	39.6	12	70	1
6247050	31 R 27	27	39.6	12	70	1
6247130	31 R 28	28	39.6	12	70	1
6247480	31 R 30	30	45.6	16	150	1
6247640	31 R 32	32	45.6	16	150	1
6240040	31 R 34	34	56.6	20	240	1
6248020	31 R 36	36	56.6	20	230	1
6248370	31 R 41	41	56.6	20	230	1
6248450	31 R 46	46	70.0	25	300	1
6248530	31 R 50	50	70.0	25	300	1
6248610	31 R 55	55	82.0	30	450	1
6248880	31 R 60	60	82.0	30	450	1
6248960	31 R 65	65	96.0	35	500	1
6249180	31 R 70	70	96.0	35	500	1
6249260	31 R 75	75	108.0	40	600	1
6249340	31 R 80	80	108.0	40	915	1
6249420	31 R 85	85	120.0	45	1100	1
6249500	31 R 90	90	120.0	45	1100	1
6249690	31 R 95	95	145.0	55	2000	1
6249770	31 R 100	100	145.0	55	2000	1
6249850	31 R 105	105	145.0	55	2000	1
6249930	31 R 110	110	153.0	60	2700	1
6250000	31 R 115	115	153.0	60	2700	1

31 VR

INSERT RING FOR FRICTION RATCHET square

- GEDORE vanadium steel 31CrV3, manganese-phosphated



Code	No.	Ø	Ø	mm	mm	mm
6261200	31 VR 8	8	19.7	6	30	1
6261390	31 VR 9	9	19.7	6	30	1
6261470	31 VR 10	10	19.7	6	30	1
6261550	31 VR 11	11	19.7	6	30	1
6261630	31 VR 12	12	27.6	8	40	1
6261980	31 VR 14	14	27.6	8	40	1
6262360	31 VR 17	17	33.6	10	60	1
6262520	31 VR 19	19	33.6	10	60	1

29

CONSTRUCTION RATCHET bi-hexagon

- Reversible ratchet with two different size heads, bi-hexagon and "rat-tail" handle



Code	No.	Ø mm	L	h	b	mm	mm
1648934	29 17x19	17 x 19	315	49.0	42.0	456	1
1382853	29 19x22	19 x 22	315	49.5	42.0	740	1
1648926	29 19x24	19 x 24	365	56.0	51.5	740	1
6262790	29 24x30	24 x 30	402	63.0	61.0	1050	1
6262950	29 27x32	27 x 32	402	63.0	61.0	1050	1
6263170	29 36x41	36 x 41	495	74.0	76.0	2000	1

41 - 41 B

REVERSIBLE LEVER CHANGE RATCHET

- With permanently fixed UD profile insert
- GEDORE vanadium steel 31CrV3, chrome-plated



Code	No.	mm	mm	mm	mm	mm
6338790	41 22	11,25	22	27.9	620	2600
6338870	41 24	11,25	24	27.9	620	2600
6338950	41 27	11,25	27	27.9	620	2600
6330030	41 28	11,25	28	27.9	620	3300
6339170	41 30	11,25	30	27.9	620	2600
6339250	41 32	11,25	32	27.9	620	2600
6338360	41 B 36	15,00	36	43.0	910	5000
6338440	41 B 41	15,00	41	43.0	910	5000
6338520	41 B 46	15,00	46	43.0	910	5000

Detailed information on products, promotions and trade fairs

... www.gedore.com



41 V - 41 BV

REVERSIBLE LEVER CHANGE RATCHET

- With permanently fixed square insert
- GEDORE vanadium steel 31CrV3, chrome-plated



Code	No.	mm	mm	mm	mm	mm
6339410	41 V 19	11,25	19	27.9	620	2600
6339680	41 V 22	11,25	22	27.9	620	2600
6339760	41 V 24	11,25	24	27.9	620	2600
6339840	41 V 27	11,25	27	27.9	620	2600
6338600	41 BV 30	15,00	30	43.0	910	5000
6339330	41 BV 32	15,00	32	43.0	910	5000
6339920	41 BV 36	15,00	36	43.0	910	5000

- Our extensive range of torque wrenches is listed up from page 304






IMPACT TOOLS

6.3 MM (1/4") SQUARE DRIVE

K 20

IMPACT SOCKET 1/4"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 6.3, ISO 1174
- * not standardised



6.3

1/4"



Code	No.	*	Ø mm	L	d ₁	d ₂	t	↺↻	📦
6198090	K 20 5,5		5.5	24	9.5	13	5	15	1
6198170	K 20 6		6.0	24	10.1	13	5	15	1
6198250	K 20 7		7.0	24	11.4	13	5	18	1
6198330	K 20 8		8.0	24	12.6	13	5	20	1
6198410	K 20 9		9.0	24	13.9	13	6	22	1
6198680	K 20 10		10.0	24	15.1	13	6	24	1
6198760	K 20 11		11.0	24	16.4	13	7	29	1
6198840	K 20 12		12.0	24	17.6	13	7	30	1
6198920	K 20 13		13.0	24	18.9	13	8	30	1
6199060	K 20 14	*	14.0	25	20.1	13	8	35	1
6199140	K 20 17	*	17.0	26	23.9	13	10	35	1

Code	No.	Ø AF	L	d ₁	d ₂	t	↺↻	📦
6199220	K 20 3/16AF	3/16	24	8.5	13	5	15	1
6199300	K 20 1/4AF	1/4	24	10.6	13	5	15	1
6199490	K 20 5/16AF	5/16	24	12.6	13	5	20	1
6199570	K 20 3/8AF	3/8	24	14.0	13	6	24	1
6199650	K 20 7/16AF	7/16	24	16.0	13	7	29	1

KB 2070 - KB 2090

ACCESSORIES for impact sockets 1/4"

- With square drive as per DIN 3121 - G 6.3, ISO 1174



6.3

1/4"




Code	No.	Ø	(mm)	↺↻	📦
6200920	KB 2070 Safety ring d 9 mm	9.0		5	1
6201060	KB 2075 Safety pin d 1.5 mm	1.5	10	5	1
6201140	KB 2090-2 Impact extension 1/4" 50 mm		50	50	1

10 MM (3/8") SQUARE DRIVE

K 30

IMPACT SOCKET 3/8"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 10, ISO 1174
- * not standardised



10

3/8"



Code	No.	*	Ø mm	L	d ₁	d ₂	t	↺↻	📦
6251160	K 30 6	*	6	33	11.3	19	5	35	5
6251240	K 30 7		7	33	12.5	19	5	35	5
6251320	K 30 8		8	33	13.8	19	5	40	5
6251400	K 30 9		9	33	15.0	19	6	40	1

Code	No.	*	Ø mm	L	d ₁	d ₂	t	↺↻	📦
6251590	K 30 10		10	33	16.3	19	6	40	10
6251670	K 30 11		11	33	17.5	19	7	50	5
6251750	K 30 12		12	33	19.0	19	7	55	5
6251830	K 30 13		13	33	20.0	22	8	60	10
6251910	K 30 14		14	33	21.3	22	8	60	5
6252050	K 30 15		15	33	22.5	22	9	60	1
6252130	K 30 16		16	33	23.8	22	9	65	1
6252210	K 30 17		17	33	25.0	22	10	70	1
6252480	K 30 18		18	33	26.3	22	10	80	1
6252560	K 30 19		19	33	27.5	22	12	80	1
6252640	K 30 20	*	20	34	28.8	22	12	85	1
6252720	K 30 21	*	21	34	30.0	22	12	85	1
6252800	K 30 22	*	22	34	31.3	22	14	90	1
6252990	K 30 23	*	23	34	32.5	22	14	90	1
6254420	K 30 24	*	24	36	33.8	22	16	95	1




1/4"

3/8"

TX K 30

IMPACT SOCKET 3/8" for protruding TORX® head screws

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 10, ISO 1174
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA



10

3/8"



Code	No.	Ø	Ø AF	Ø mm	L	d ₁	d ₂	t	↺↻	📦
6265030	TX K 30 E5	E5	M4	4.73	33	9.0	19	3.2	35	1
6265110	TX K 30 E6	E6	M5	5.74	33	10.0	19	4.0	35	1
6265380	TX K 30 E7	E7	M6	6.16	33	10.5	19	4.8	35	1
6265460	TX K 30 E8	E8	M6 - M7	7.52	33	11.8	19	5.6	35	1
6265540	TX K 30 E10	E10	M8	9.42	33	13.7	19	6.4	40	1
6265620	TX K 30 E12	E12	M10	11.17	33	15.5	19	8.0	40	1
6265700	TX K 30 E14	E14	M12	12.90	33	17.2	19	8.8	50	1

KB 3019 - KB 3095

ACCESSORIES for impact sockets 3/8"

- With square drive as per DIN 3121 - G 10, ISO 1174



10

3/8"



Code	No.	(mm)	↺↻	📦
6263410	KB 3019 Impact converter 3/8" to 1/2"	36	70	1
6263250	KB 3020 Impact reducer 3/8" to 1/4"	31	60	1
6261710	KB 3090-3 Impact extension 3/8" 75 mm	75	120	1
6262010	KB 3090-5 Impact extension 3/8" 125 mm	125	165	1
6262280	KB 3090-10 Impact extension 3/8" 250 mm	250	286	1
6262440	KB 3095 Impact universal joint 3/8"	42	110	1

KB 3070 / KB 3075

SAFETY RING AND SAFETY PIN for impact sockets 3/8"



10

3/8"



Code	No.	Description	Ø	(mm)	↺↻	📦
6260820	KB 3070 6-12 for d2 = 19 mm, K 30 6-12 mm	Safety ring d 13 mm	13		5	1
6260900	KB 3070 13-24 for d2 = 22 mm, K 30 13-24 mm	Safety ring d 16 mm	16		5	1
6261040	KB 3075 6-12 for K 30 6-12 mm	Safety pin d 2.5 mm	2	14	5	1
6261120	KB 3075 13-24 for K 30 13-24 mm	Safety pin d 2.5 mm	2	16	5	1

12.5 MM (1/2") SQUARE DRIVE


K 19

IMPACT SOCKET 1/2"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- * not standardised

12.5

1/2"



Code	No.	*	Ø mm	L	d ₁	d ₂	t	±	±
6160280	K 19 10		10	35	17.5	25	6	100	10
6160360	K 19 11		11	35	18.5	25	7	100	5
6160440	K 19 12		12	35	20.0	25	7	100	5
6160520	K 19 13		13	35	21.0	25	8	100	10
6160600	K 19 14		14	35	22.5	25	8	100	5
6161680	K 19 15		15	35	23.5	30	9	100	10
6160790	K 19 16		16	35	25.0	30	9	100	10
6160870	K 19 17		17	35	26.0	30	10	140	10
6160950	K 19 18		18	35	27.5	30	10	120	10
6161090	K 19 19		19	35	28.5	30	12	140	10
6161170	K 19 21		21	38	31.0	30	12	130	10
6161250	K 19 22		22	38	32.5	30	14	150	10
6161330	K 19 23	*	23	39	34.0	30	14	150	10
6161410	K 19 24		24	39	35.0	30	16	150	10
6182680	K 19 27		27	40	39.0	30	17	160	10
1560557	K 19 30	*	30	49	42.5	30	20	260	1
1783742	K 19 32	*	32	49	45.0	30	21	270	1

Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6166990	K 19 3/8AF	3/8	35	17.0	25	6	80	1
6162300	K 19 7/16AF	7/16	35	19.0	25	7	80	1
6162650	K 19 1/2AF	1/2	35	21.0	25	7	80	1
6163030	K 19 9/16AF	9/16	35	23.0	25	8	80	1
6163460	K 19 5/8AF	5/8	35	25.0	30	9	100	1
6163700	K 19 11/16AF	11/16	35	27.0	30	10	120	1
6163970	K 19 3/4AF	3/4	35	29.0	30	12	130	1
6168420	K 19 13/16AF	13/16	38	31.0	30	13	130	1
6169820	K 19 7/8AF	7/8	38	33.0	30	14	140	1
6164190	K 19 15/16AF	15/16	39	35.0	30	15	150	1
6169900	K 19 1AF	1	39	37.0	30	16	160	1
6164350	K 19 1.1/16AF	1.1/16	40	38.5	30	17	160	1
6164510	K 19 1.1/8AF	1.1/8	40	40.5	30	18	170	1
6165240	K 19 1.1/4AF	1.1/4	49	45.0	30	20	180	1
6165320	K 19 1.5/16AF	1.5/16	49	47.0	30	20	200	1




K 19 L

IMPACT SOCKET 1/2" long pattern

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174

12.5

1/2"



Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6163110	K 19 L 8	8	77	15.3	25	12	140	5
6163380	K 19 L 10	10	77	17.8	25	12	150	10
6163540	K 19 L 13	13	77	21.5	25	13	200	10
6163620	K 19 L 14	14	77	22.8	25	13	180	5
6197790	K 19 L 16	16	77	24.0	30	14	225	5
6163890	K 19 L 17	17	77	26.5	30	15	300	10
6197870	K 19 L 18	18	82	27.8	30	15	265	5
6164000	K 19 L 19	19	82	29.0	30	17	300	10
6162730	K 19 L 21	21	82	31.5	30	17	260	5
6164270	K 19 L 22	22	82	32.8	30	19	350	10
6199810	K 19 L 23	23	82	34.0	30	19	300	1
6164430	K 19 L 24	24	82	35.3	30	21	340	10
6164780	K 19 L 27	27	82	39.0	30	22	480	5


K 19 LD

IMPACT SOCKET 1/2" for cars

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- For racing wheels, with a plastic insert to protect the wheel nuts
- Thin-walled to protect the alloy wheels

12.5

1/2"



Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6149120	K 19 LD 17	17	80	25.7	30	14	250	1
6149200	K 19 LD 19	19	80	28.2	30	16	280	1


KR 19

IMPACT SOCKET PKW 1/2"

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174

12.5

1/2"



Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6162490	KR 19 17	17	45	30.0	30	11	135	1
6162570	KR 19 19	19	45	33.0	30	11	135	1

Deviant packing units see article description.




TX K 19

IMPACT SOCKET 1/2" for protruding TORX® head screws

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 G 12.5, ISO 1174
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA

12.5

1/2"



Code	No.	Ø	12.5	mm	L	d ₁	d ₂	t	12.5	1/2"
6223110	TX K 19 E10	E10	M8	9.42	38	14.5	25	6.4	70	1
6223380	TX K 19 E12	E12	M10	11.17	38	16.5	25	8.0	72	1
6223460	TX K 19 E14	E14	M12	12.90	38	18.5	25	8.8	75	1
6223540	TX K 19 E16	E16	M12	14.76	38	20.5	25	9.6	75	1
6223620	TX K 19 E18	E18	M14	16.70	38	22.5	25	11.1	92	1
6223700	TX K 19 E20	E20	M16	18.45	40	25.0	30	12.7	105	1
6223890	TX K 19 E24	E24	M18 - M20	22.16	40	28.5	30	15.9	110	1


IN K 19

IMPACT SOCKET 1/2" for in-hex screws

- Suitable for all standard electric and air tools
- Square drive, Form H

12.5

1/2"



Code	No.	mm	L ₁	L ₂	d	12.5	1/2"
6223970	IN K 19 5	5	44	7.5	25	63	10
6224000	IN K 19 6	6	44	9.0	25	65	10
6224190	IN K 19 8	8	44	11.0	25	75	10
6224270	IN K 19 10	10	44	13.0	25	90	10
6224350	IN K 19 12	12	50	15.0	30	110	10
6225320	IN K 19 14	14	50	17.0	30	145	10
6225670	IN K 19 17	17	50	19.0	30	195	10


ITX K 19

SCREWDRIVER BIT SOCKET 1/2" for recessed TORX® head screws

- Square drive, Form H
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA

12.5

1/2"



Code	No.	*	12.5	mm	L ₁	L ₂	d	12.5	1/2"
6197280	ITX K 19 T30	T30	M6 - M7	5.52	47	26	25	78	5
6197360	ITX K 19 T40	T40	M7 - M8	6.65	47	26	25	78	5
1603124	ITX K 19 T45	T45	M8 - M10	7.82	47	26	25	78	5
6197440	ITX K 19 T50	T50	M10	8.83	47	26	25	80	5
6197520	ITX K 19 T55	T55	M12	11.22	47	26	25	84	5
6197600	ITX K 19 T60	T60	M14	13.25	47	26	25	87	5


KB 1930 - KB 1995

ACCESSORIES for impact sockets 1/2"

- With square drive as per DIN 3121 - G 12.5, Form F, G, and H

12.5

1/2"

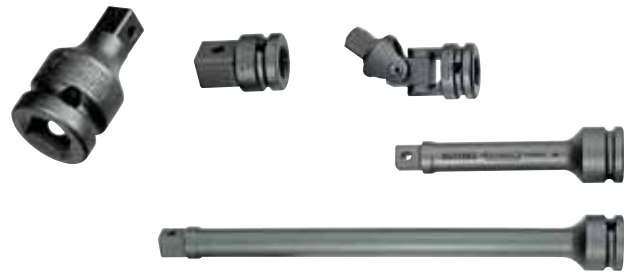

Code	No.	mm	12.5	1/2"
6650370	KB 1930 Reducer 1/2" to 3/8"	44.0	95	1
6650020	KB 1932 Convertor 1/2" to 3/4"	44.0	110	1
6655250	KB 1990-5 Impact extension 1/2" 125 mm	125.0	225	1
6650100	KB 1990-10 Impact extension 1/2" 250 mm	250.0	500	1
6655410	KB 1995 Impact universal joint 1/2"	75.5	170	1
6524150	KB 619 Adaptor for bits 1/4" hex - 1/2" square	35.0	65	10
6563480	KB 819 Adaptor for bits 5/16" hex - 1/2" square	35.0	65	5

KB 1970 - KB 1975

SAFETY RING AND SAFETY PIN for impact sockets 1/2"

12.5

1/2"



Code	No.	Description	Ø	mm	12.5	1/2"
6654790	KB 1970 10-14 for d2 = 25 mm, K 19 10-14 and 3/8-9/16"	Safety ring d 19 mm	19		2	10
6654870	KB 1970 15-27 for d2 = 30 mm, K 19 15-32 and 5/8-1.5/16"	Safety ring d 24 mm	24		2	10
6654950	KB 1975 10-14 for K 19 10-14 and 3/8-9/16"	Safety pin d 3 mm	3	20	2	10
6655090	KB 1975 15-27 for K 19 15-32 and 5/8-1.5/16"	Safety pin d 3 mm	3	25	4	10

K 19-028

IMPACT SOCKET SET 1/2" FOR CARS 5 pieces

- 5 power-operated sockets, suitable for all standard electric and air wrenches
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- In plastic case

12.5

1/2"




Code	No.	12.5	1/2"
1646923	K 19-028 Ø 10 13 17 19 24	730	1

20 MM (3/4") SQUARE DRIVE

K 32

IMPACT SOCKET 3/4"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 20, ISO 1174
- * not standardised



20
3/4"


Code	No.	*	Ø mm	L	d ₁	d ₂	t	±	±
6282040	K 32 17		17	50	30.0	44	10.0	330	1
6289990	K 32 18		18	50	31.0	44	11.0	320	1
6282120	K 32 19		19	50	32.5	44	12.0	350	1
6282200	K 32 22		22	50	36.0	44	14.0	380	1
6282390	K 32 24		24	50	39.0	44	16.0	400	1
6282470	K 32 27		27	53	42.5	44	18.0	410	1
6282550	K 32 30		30	53	46.0	44	20.0	430	1
6282630	K 32 32		32	56	49.0	44	20.0	450	1
6283010	K 32 33 (3/4W)	*	33	56	50.0	44	20.0	480	1
6281580	K 32 34		34	56	51.0	44	23.0	440	1
6282710	K 32 36		36	56	54.0	44	23.0	500	1
6281740	K 32 38	*	38	56	56.0	44	23.0	480	1
6282980	K 32 41		41	57	60.0	44	25.0	650	1

Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6285300	K 32 13/16AF	13/16	50	34	44	14.0	370	1
6284410	K 32 7/8AF	7/8	50	36	44	16.0	380	1
6284680	K 32 15/16AF	15/16	50	38	44	16.0	400	1
6285490	K 32 1AF	1	50	40	44	16.0	395	1
6285650	K 32 1.1/16AF	1.1/16	53	42	44	18.0	410	1
6284760	K 32 1.1/8AF	1.1/8	53	44	44	20.0	430	1
6284840	K 32 1.1/4AF	1.1/4	56	48	44	20.0	450	1
6284920	K 32 1.5/16AF	1.5/16	56	50	44	23.0	480	1
6285730	K 32 1.3/8AF	1.3/8	56	52	44	23.0	500	1
6285060	K 32 1.7/16AF	1.7/16	56	54	44	23.0	510	1
6285140	K 32 1.1/2AF	1.1/2	56	56	44	25.0	580	1
6285810	K 32 1.5/8AF	1.5/8	57	60	44	25.0	650	1
6286030	K 32 1.11/16AF	1.11/16	57	62	44	29.0	720	1
6286110	K 32 1.3/4AF	1.3/4	57	64	44	29.0	850	1
6286380	K 32 1.7/8AF	1.7/8	62	68	54	31.0	950	1
6286460	K 32 2AF	2	65	70	54	31.0	1100	1

K 32 L

IMPACT SOCKET 3/4" long pattern

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 H 20, ISO 1174



20
3/4"


Code	No.	Ø mm	L	d ₁	d ₂	t	±	±
6283600	K 32 L 17	17	100	30.0	44	15.0	580	1
6283790	K 32 L 19	19	100	32.5	44	17.0	650	1
6286700	K 32 L 21	21	100	35.0	44	19.0	700	1
6283870	K 32 L 22	22	100	36.0	44	19.0	700	1
6283950	K 32 L 24	24	100	39.0	44	21.0	740	1
6284090	K 32 L 27	27	100	42.5	44	23.0	760	1
6284170	K 32 L 30	30	100	46.0	44	25.0	890	1
6284250	K 32 L 32	32	100	49.0	44	25.0	965	1
6286540	K 32 L 33 (3/4W)	33	100	50.0	44	25.0	780	1
6281660	K 32 L 34	34	100	51.0	44	28.0	840	1
6284330	K 32 L 36	36	100	54.0	44	28.0	1200	1
6286890	K 32 L 41	41	100	60.0	44	30.0	1200	1

IN K 32

IMPACT SOCKET 3/4" for in-hex screws

- Suitable for all standard electric and air tools
- Square drive

20
3/4"



Code	No.	Ø mm	L ₁	L ₂	d	±	±
1956477	IN K 32 14	14	65	17	44	440	1
1956485	IN K 32 17	17	65	19	44	495	1
1956493	IN K 32 19	19	65	21	44	530	1
1956507	IN K 32 22	22	65	24	44	590	1
1956515	IN K 32 24	24	65	26	44	630	1
1956523	IN K 32 27	27	65	28	44	695	1

KB 3219 - KB 3275

ACCESSORIES for impact sockets 3/4"

- With square drive as per DIN 3121, ISO 1174, Form F and H

20
3/4"



Code	No.	Ø	± mm	±	±
6675280	KB 3219 Impact reducer 3/4" to 1/2"	65	320	1	
6671530	KB 3221 Impact converter 3/4" to 1"	65	410	1	
6675600	KB 3290-8 Impact extension 3/4" 205 mm	205	710	1	
6675790	KB 3290-12 Impact extension 3/4" 300 mm	300	1000	1	
6675870	KB 3290-16 Impact extension 3/4" 405 mm	405	1250	1	
6676090	KB 3295 Impact universal joint 3/4"	108	580	1	
6675360	KB 3270 Safety ring d 36 mm	36	5	1	
6675440	KB 3275 Safety pin d 4 mm	4	35	8	1

K 32-040

IMPACT SOCKET SET 3/4" FOR TRUCKS 4 pieces

- 4 sockets, suitable for all standard electric and air tools
- Square drive as per DIN 3121 H 20, ISO 1174
- In plastic case

20
3/4"



Code	No.	±	±
1828142	K 32-040 Ø 24 27 30 33	1630	1




25 MM (1") SQUARE DRIVE

K 21

IMPACT SOCKET 1"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 25, ISO 1174
- Use KB 3770 and KB 3775 from 75 mm and up
- * not standardised




Code	No.	*	Ø mm	L	d ₁	d ₂	t	⚙️	📦
6183060	K 21 22		22	59	39.5	54	14.0	600	1
6183140	K 21 24		24	59	42.0	54	16.0	600	1
6183220	K 21 27		27	59	46.0	54	18.0	650	1
6183300	K 21 30		30	61	49.5	54	20.0	700	1
6183490	K 21 32		32	61	52.0	54	20.0	750	1
6183650	K 21 33	*	33	61	53.0	54	20.0	750	1
6196980	K 21 34		34	61	54.0	54	20.0	640	1
6183570	K 21 36		36	64	57.0	54	23.0	800	1
6184890	K 21 38	*	38	64	59.5	54	23.0	825	1
6183730	K 21 41		41	68	63.0	54	25.0	850	1
6184970	K 21 42	*	42	68	63.0	54	25.0	950	1
6183810	K 21 46		46	74	69.5	54	29.0	1100	1
6184030	K 21 50		50	78	74.0	54	31.0	1250	1
6184110	K 21 55		55	85	81.0	54	34.0	1350	1
6184380	K 21 60		60	85	87.0	54	36.0	1450	1
6184460	K 21 65		65	90	93.0	54	38.0	1850	1
6184540	K 21 70		70	92	99.5	54	38.0	2000	1
6184620	K 21 75	*	75	98	106.0	86	40.0	2350	1
6184700	K 21 80	*	80	105	112.0	86	46.0	2700	1

Code	No.	Ø mm	L	d ₁	d ₂	t	⚙️	📦
6186320	K 21 1AF	1	59	44	54	18.0	650	1
6186400	K 21 1.1/4AF	1.1/4	61	52	54	20.0	750	1
6186590	K 21 1.7/16AF	1.7/16	64	58	54	23.0	800	1
6186750	K 21 1.1/2AF	1.1/2	64	60	54	25.0	850	1
6186670	K 21 1.5/8AF	1.5/8	68	64	54	25.0	850	1
6186830	K 21 1.13/16AF	1.13/16	74	70	54	29.0	1100	1
6186910	K 21 1.7/8AF	1.7/8	74	72	54	31.0	1150	1
6187050	K 21 2.1/4AF	2.1/4	85	84	54	36.0	1350	1

K 21 L

IMPACT SOCKET 1" long pattern

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 25, ISO 1174




Code	No.	Ø mm	L	d ₁	d ₂	t	⚙️	📦
6185350	K 21 L 22	22	100	39.5	54	19.0	1000	1
6185430	K 21 L 24	24	100	42.0	54	21.0	1080	1
6185510	K 21 L 27	27	100	46.0	54	23.0	1100	1
6185780	K 21 L 30	30	100	49.5	54	25.0	1200	1
6185860	K 21 L 32	32	100	52.0	54	25.0	1250	1
6197950	K 21 L 33	33	100	53.0	54	25.0	1100	1
6197010	K 21 L 34	34	100	54.0	54	28.0	1000	1
6185940	K 21 L 36	36	100	57.0	54	28.0	1500	1
6186080	K 21 L 38	38	100	59.5	54	28.0	1580	1
6186160	K 21 L 41	41	100	63.0	54	30.0	1710	1
6186240	K 21 L 46	46	100	69.5	54	34.0	1750	1

IN K 21

IMPACT SOCKET 1" for in-hex screws

- Suitable for all standard electric and air tools
- Square drive



Code	No.	Ø mm	L ₁	L ₂	d	⚙️	📦
1956558	IN K 21 19	19	75	21	54	825	1
1956566	IN K 21 22	22	75	24	54	885	1
1956574	IN K 21 24	24	75	26	54	920	1
1956582	IN K 21 27	27	75	28	54	980	1
1956590	IN K 21 32	32	75	32	54	1125	1
1956604	IN K 21 36	36	75	33	54	1245	1



KB 2132 - KB 2195

ACCESSORIES for impact sockets 1"

- Square drive as per DIN 3121, ISO 1174, Form F and H
- Use KB 3770 and KB 3775 for 75 and 80 mm



Code	No.	Ø [mm]	⚙️	📦
6657460	KB 2132 Impact reducer 1" to 3/4"	75	350	1
6657890	KB 2137 Impact convertor 1" to 1.1/2"	82	1000	1
6657620	KB 2170 Safety ring d 45 mm	45	8	10
6657700	KB 2175 Safety pin d 5 mm	5	45	10
6657970	KB 2190-8 Impact extension 1" 208 mm	208	1250	1
6658000	KB 2190-12 Impact extension 1" 300 mm	300	1600	1
6658190	KB 2190-16 Impact extension 1" 405 mm	405	2000	1
6658350	KB 2195 Impact universal joint 1"	140	1400	1
6676760	KB 3770 Safety ring d 75 mm	75	15	1
6676840	KB 3775 Safety pin d 6 mm	6	75	16


40 MM (1.1/2") SQUARE DRIVE

K 37

IMPACT SOCKET 1.1/2"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 40, ISO 1174
- Use KB 6470 and KB 6475 from 95 mm and up
- * not standardised

40
1 1/2"

1 1/2"



Code	No.	*	Ø mm	L	d ₁	d ₂	t	ISO	ISO
6328130	K 37 46		46	83	76	86	29.0	2700	1
6328210	K 37 50	*	50	86	80	86	31.0	2850	1
6328480	K 37 55		55	89	89	86	34.0	2930	1
6328560	K 37 60		60	93	93	86	36.0	3000	1
6328640	K 37 65		65	98	99	86	38.0	3050	1
6328720	K 37 70		70	103	106	86	42.0	3600	1
6328800	K 37 75		75	108	112	86	44.0	3650	1
6328990	K 37 80		80	114	118	86	46.0	4150	1
6329020	K 37 85		85	120	125	86	51.0	4500	1
6329100	K 37 90		90	120	131	86	51.0	5400	1
6329290	K 37 95	*	95	125	137	127	54.0	5800	1
6329370	K 37 100	*	100	130	143	127	57.0	6450	1
6329450	K 37 105	*	105	135	150	127	61.0	6800	1
6329530	K 37 110	*	110	140	156	127	64.0	7150	1
6329610	K 37 115	*	115	145	162	127	67.0	8100	1
6329880	K 37 120	*	120	150	169	127	71.0	9100	1



K 37 L

IMPACT SOCKET 1.1/2" long pattern

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 H 40, ISO 1174
- Use KB 6470 and KB 6475 from 95 mm and up

40
1 1/2"


Code	No.	Ø mm	L	d ₁	d ₂	t	ISO	ISO
6330110	K 37 L 41	41	135	69	86	30.0	2650	1
6330380	K 37 L 46	46	135	76	86	34.0	3000	1
6330460	K 37 L 50	50	135	80	86	36.0	3800	1
6330540	K 37 L 55	55	140	87	86	39.0	4290	1
6330620	K 37 L 60	60	140	93	86	41.0	4700	1
6330700	K 37 L 65	65	140	99	86	43.0	5700	1
6330890	K 37 L 70	70	140	106	86	47.0	6900	1
6330970	K 37 L 75	75	145	112	86	49.0	8150	1
6331000	K 37 L 80	80	145	118	86	51.0	9200	1
6331190	K 37 L 85	85	145	125	86	56.0	10000	1
6331270	K 37 L 90	90	145	131	86	56.0	11300	1
6331350	K 37 L 95	95	150	137	127	59.0	12750	1
6331430	K 37 L 100	100	155	143	127	62.0	14350	1
6331510	K 37 L 105	105	160	150	127	66.0	15700	1
6331780	K 37 L 110	110	165	156	127	69.0	17400	1
6331860	K 37 L 115	115	170	162	127	72.0	18800	1
6331940	K 37 L 120	120	175	169	127	76.0	19900	1

KB 3721 - KB 3775

ACCESSORIES for impact sockets 1.1/2"

- Square drive as per DIN 3121, ISO 1174, Form F and H
- Use KB 3770 and KB 3775 up to 90 mm
- Use KB 6470 and KB 6475 from 95 mm and up

40
1 1/2"


Code	No.	Ø	mm	ISO	ISO
6676410	KB 3721	86	95	2300	1
1531220	KB 3764	86	110	2500	1
6676760	KB 3770	75	15		1
6676840	KB 3775	6	75	16	1



63 MM (2.1/2") SQUARE DRIVE


K 64

IMPACT SOCKET 2.1/2"

- DIN 3129, ISO 2725-2
- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 63, ISO 1174
- * not standardised

63

2 1/2



Code	No.	*	Ø mm	L	d ₁	d ₂	t	Wt	Box
6371300	K 64 75		75	135	118	127	44	7600	1
6371490	K 64 80		80	135	124	127	46	7350	1
6371570	K 64 85		85	140	130	127	51	7000	1
6371650	K 64 90		90	140	136	127	51	7600	1
6371730	K 64 95		95	145	143	127	54	8000	1
6371810	K 64 100		100	150	149	127	57	9000	1
6372030	K 64 105		105	155	155	127	61	10000	1
6372110	K 64 110		110	160	161	127	64	11000	1
6372380	K 64 115		115	165	167	127	67	11500	1
6372460	K 64 120	*	120	170	174	127	71	12000	1

KB 6437 - KB 6475

ACCESSORIES for impact sockets 2.1/2"

- Square drive as per DIN 3121, ISO 1174, Form F and H
- Use KB 3770 and KB 3775 up to 90 mm
- Use KB 6470 and KB 6475 from 95 mm and up

63

2 1/2

40

1 1/2



Code	No.	Ø	Wt (mm)	Wt	Box
6699700	KB 6437		145	7400	1
6699890	KB 6470	114		40	1
6699970	KB 6475	8	110	40	1

Securing with pin and ring



IMPACT DRIVER


K 1900

HAND-OPERATED IMPACT DRIVER 1/2"

- Particularly suitable for loosening tight bolts or screws with the aid of a hammer
- Reversible for right and left hand operation
- Will fit any 1/2" impact socket or bit

12.5

1/2



Code	No.	■	L	Ø-d	Wt	Box
6654440	K 1900	1/2	123	34	510	1



Detailed information on products, promotions and trade fairs

... www.gedore.com



K 1900-013

HAND-OPERATED IMPACT DRIVER SET 1/2"

- Complete with the most frequently used screwdriving bits, for use with the most common slotted head, cross-head and hexagon socket head screws
- Reversible for right and left hand operation
- In GEDORIT blue sheet steel case with black plastic insert, dimensions: 281 x 79 x 42 mm

12.5

1/2

8

5/16

1/4

3/8

1/2

3/4

1



Code	No.	Wt	Box
6654600	K 1900-013	1220	1
	880 7 8 9 12		
	885 5 6 8 10		
	890 2 3 4L		
	KB 819		
	K 1900		


471-023
MINIBIT SET 23 pieces

- For electronics engineers, mechanics, model makers, etc.
- With 1/4" reversible ratchet and 1/4" to 4 mm bit adaptor, for use with 4 mm minibits
- In plastic case
- Dimensions: 110 x 65 x 31 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	113	1
1801325	471-023		
	471		
	480 0,8 1,2 1,5 1,8		
	485 0,7 0,9 1,3 1,5		
	490 PH 000 00 0		
	490 PZD 000 00 0		
	487 TX T3 T4 T5 T6 T7 T8		
	420 499		

103

D 20 FMU-20 Set for precision mechanics 1/4" + 4 mm


6.3 MM (1/4") HEXAGON SQUARE DRIVE
SCREWDRIVER BITS 6.3 MM (1/4")

10 / 5 =

Sales unit 10 / 5 pieces each

680
SCREWDRIVER BIT for slotted head screws


- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-1
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish



Code	No.	b	t	L	7	10
6537640	680 4	4.0	0.5	25	7	10
6537720	680 4,5	4.5	0.6	25	7	10
6537800	680 5,5	5.5	0.8	25	8	10
6537990	680 6,5	6.5	1.2	25	9	10
6538020	680 7	7.0	1.2	25	9	10
6538100	680 8	8.0	1.6	25	14	10
6538290	680 10	10.0	1.6	39	16	5

685
SCREWDRIVER BIT for in-hex screws


- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-3
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish



Code	No.	mm	ISO 4762	DIN 7984	L	5	10
1802399	685 2	2.0	M2	M2	25	5	10
6538880	685 2,5	2.5	M3	M4	25	5	10
6538960	685 3	3.0	M4	M5	25	5	10
6539180	685 4	4.0	M5	M6	25	6	10
6539260	685 5	5.0	M6	M8	25	7	10
6539340	685 6	6.0	M8	M10	25	8	10
6539420	685 8	8.0	M10	M12	33	12	10
6539500	685 10	10.0	M12	M14	33	15	5


690
SCREWDRIVER BIT
for cross-slotted head screws PH


- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-2, tip as per DIN ISO 8764-1 PH
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish



Code	No.	PH	L	5	10
1803514	690 0	0	25	5	10
6541240	690 1	1	25	5	10
1828150	690 1 L	1	50	9	10
6541320	690 2	2	25	5	10
6541400	690 2 L	2	50	10	10
6541590	690 3	3	25	5	10
6541670	690 3 L	3	50	8	10
6541750	690 4	4	32	15	10

690 PZD
SCREWDRIVER BIT
for cross-slotted head screws PZ


- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-2, tip as per DIN ISO 8764-1 PZ
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish



Code	No.	PZ	L	5	10
6552790	690 PZD 1	1	25	5	10
1827022	690 PZD 1 L	1	50	9	10
6552870	690 PZD 2	2	25	5	10
6552950	690 PZD 2 L	2	50	10	10
6553090	690 PZD 3	3	25	5	10
6553170	690 PZD 3 L	3	50	8	10
6553680	690 PZD 4	4	32	15	10

686
SCREWDRIVER BIT
for multi-spline screws RIBE®

- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish
- RIBE® is a registered trademark of Rich. Bergner



Code	No.	M	L	5	10
6540510	686 4	M4	33	5	10
6540780	686 5	M5	33	5	10
6540860	686 6	M6	33	8	10
6540940	686 8	M8	33	10	10




685 X

SCREWDRIVER BIT

for multi-point screws XZN

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 65254
- Hexagon drive as per DIN 3126 - C 6.3 (1/4"), tip as per DIN 2325
- GEDORE special vanadium steel, gun-metal finish




Code	No.	ISO	mm	L	mm	mm
6540000	685 X 5	M5	25	5	10	
6540190	685 X 6	M6	25	5	10	
6540270	685 X 8	M8	25	8	10	

687 TX

SCREWDRIVER BIT

for recessed TORX® head screws

- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA




Code	No.	ISO	mm	L	mm	mm
6541830	687 TX T6	M2	1.70	25	5	10
6541910	687 TX T7	M2,5	1.99	25	5	10
6542050	687 TX T8	M2,5	2.31	25	5	10
6542130	687 TX T9	M3	2.50	25	5	10
6542210	687 TX T10	M3 - M3,5	2.74	25	5	10
6542480	687 TX T15	M3,5 - M4	3.27	25	5	10
6542560	687 TX T20	M4 - M5	3.86	25	5	10
6542640	687 TX T25	M4,5 - M5	4.43	25	5	10
6542720	687 TX T27	M4,5 - M6	4.99	25	6	10
6542800	687 TX T30	M6 - M7	5.52	25	6	10
6542990	687 TX T40	M7 - M8	6.65	25	6	10

688 TX

SCREWDRIVER BIT

for recessed TORX® head screws with pilot


- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- GEDORE special vanadium steel, gun-metal finish
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA



Code	No.	ISO	mm	L	mm	mm
6535510	688 TX T10	M3 - M3,5	2.74	25	5	10
6535780	688 TX T15	M3,5 - M4	3.27	25	5	10
6535860	688 TX T20	M4 - M5	3.86	25	5	10
6535940	688 TX T25	M4,5 - M5	4.43	25	5	10
6536080	688 TX T27	M4,5 - M6	4.99	25	6	10
6536160	688 TX T30	M6 - M7	5.52	25	6	10
6536240	688 TX T40	M7 - M8	6.65	25	6	10

TIN SCREWDRIVER BITS 6.3 MM (1/4")

- Made from high-quality materials with high-strength; double titanium nitride surface coating
- High degree of wear resistance, preventing damage to screw heads and ensuring long life of the bit
- ☞ ☞ = Sales unit 5 pieces each



Code	No.	b	t	L	mm	mm
1828320	TIN 680 4	4.0	0.5	25	7	5
1828339	TIN 680 5,5	5.5	0.8	25	8	5
1828347	TIN 680 6,5	6.5	1.2	25	9	5
1828355	TIN 680 8	8.0	1.6	25	14	5




TIN 685

SCREWDRIVER BIT

for in-hex screws

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-3
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")




Code	No.	mm	ISO 4762	DIN 7984	L	mm	mm
1828363	TIN 685 2	2.0	M2	M2	25	5	5
1828371	TIN 685 2,5	2.5	M3	M4	25	5	5
1828398	TIN 685 3	3.0	M4	M5	25	5	5
1828401	TIN 685 4	4.0	M5	M6	25	6	5
1828428	TIN 685 5	5.0	M6	M8	25	7	5
1828436	TIN 685 6	6.0	M8	M10	25	8	5
1828444	TIN 685 8	8.0	M10	M12	33	12	5
1828452	TIN 685 10	10.0	M12	M14	33	15	5

TIN 690

SCREWDRIVER BIT

for cross-head screws PH

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-2, tip as per DIN ISO 8764-1 PH
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")




Code	No.	PH	L	mm	mm
1828533	TIN 690 1	1	25	5	5
1828541	TIN 690 1 L	1	50	9	5
1828568	TIN 690 2	2	25	5	5
1828576	TIN 690 2 L	2	50	10	5
1828584	TIN 690 3	3	25	5	5
1828592	TIN 690 3 L	3	50	11	5

TIN 690 PZD

SCREWDRIVER BIT

for cross-head screws PZ

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-2, tip as per DIN ISO 8764-1 PZ
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")




Code	No.	PZ	L	mm	mm
1828606	TIN 690 PZD 1	1	25	5	5
1828614	TIN 690 PZD 1 L	1	50	9	5
1828622	TIN 690 PZD 2	2	25	10	5
1828630	TIN 690 PZD 2 L	2	50	5	5
1828649	TIN 690 PZD 3	3	25	11	5
1828657	TIN 690 PZD 3 L	3	50	11	5

TIN 687 TX

SCREWDRIVER BIT

for recessed TORX® head screws


- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 6.3 (1/4")
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA



Code	No.	mm	ISO	mm	L	mm	mm
1828460	TIN 687 TX T10	T10	M3 - M3,5	2.74	25	5	5
1828479	TIN 687 TX T15	T15	M3,5 - M4	3.27	25	5	5
1828487	TIN 687 TX T20	T20	M4 - M5	3.86	25	5	5
1828495	TIN 687 TX T25	T25	M4,5 - M5	4.43	25	5	5
1828509	TIN 687 TX T27	T27	M4,5 - M6	4.99	25	5	5
1828517	TIN 687 TX T30	T30	M6 - M7	5.52	25	6	5
1828525	TIN 687 TX T40	T40	M7 - M8	6.65	25	6	5


671
BIT REVERSIBLE RATCHET

- With knurled head for quick starting or counter-holding of screws
- Hex recess drive as per DIN 3126 - D 6.3 (1/4")
- Slimline design for working in confined spaces




Code	No.	□"	○"	mm	mm	mm	mm
6535350	671	1/4	15	127	18.3	105	5


FEATURES

Slimline design for working in confined spaces

Bit ratchet and bit



Ratchet and socket

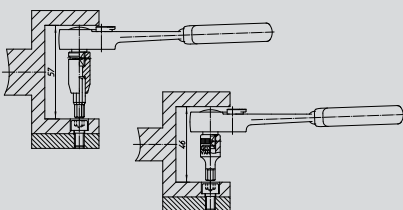
673
ADAPTOR

- Acc. to DIN 7428, ISO 3317
- Hexagon drive as per DIN 3126 - E 6.3 (1/4")
- Square drive as per DIN 3121 for power-driven sockets



Code	No.	□"	○"	mm	mm	mm	mm
6536320	673 6,3	1/4	1/4	50	16	10	
1834878	673 10	3/8	1/4	50	25	10	

673 K
SOCKET HOLDER short pattern


Code	No.	□"	○"	mm	mm	mm	mm
2000245	673 K	1/4	1/4	17	1		

673 L
SOCKET HOLDER long

- 1/4" hexagon drive and square drive as per DIN 3120 - A 6.3 (1/4")
- Hand operation
- For use with driving handle no. 676, or torque handle no. 2140



Code	No.	□"	○"	mm	mm	mm	mm
1811061	673 L	1/4	1/4	130	40	1	

674
BIT SCREWDRIVER

with reversible mechanism

- Hexagon drive as per DIN 3126 - D 6.3 (1/4"), with powerful magnetic screw retainer
- Smooth gear mechanism with knurled head for quick starting or counter-holding of screws
- The blue handle makes it possible to tighten even hard-to-turn wood screws
- The ratchet is reversible and fully lockable



Code	No.	□"	mm	mm	mm	mm
6530710	674	1/4	55	215	200	5

676
DRIVING HANDLE

- Non-slip 2-component handle
- Recessed hexagon drive 1/4"



Code	No.	□"	mm	mm	mm
1649337	676	1/4	43	1	

698
BIT HOLDER magnetic

- Hexagon drive as per DIN 3126 - E 6.3 (1/4"), magnetic, and hex recess drive as per DIN 3126 - D 6.3 (1/4")
- Powerful magnetic screw retainer, "automatic holder"



Code	No.	□"	○"	mm	mm	mm
1761110	698	1/4	1/4	73	33	1

699
BIT HOLDER for power tools


- With magnetic holder
- Acc. to DIN 7427 Form D
- Hexagon drive as per DIN 3126 - E 6.3 (1/4") and hex recess drive as per DIN 3126 - D 6.3 (1/4")



Code	No.	□"	○"	mm	mm	mm	mm
6538610	699	1/4	1/4	30	60	40	10

699 L
BIT HOLDER LONG long

- Hexagon drive as per DIN 3126 - C 6.3 (1/4") and hex recess drive as per DIN 3126 - D 6.3 (1/4")
- With magnetic screw retainer
- Hand operation
- For use with driving handle, No. 676, or torque handle, No. 2140



Code	No.	□"	○"	mm	mm	mm	mm
1802437	699 L	1/4	1/4	130	41	1	

700
BIT HOLDER magnetic

- Quick-grip system for hex bits as per DIN 3126 - C 6.3 + E 6.3 (1/4")



Code	No.	□"	○"	Ø	mm	mm	mm
6530550	700	1/4	1/4	14	51	25	1

169
MAGAZINE HANDLE SCREWDRIVER


- Magnetic magazine handle with room for 7 bits
- Cap with click-locking
- No. 169 L = empty



Code	No.	mm	mm	mm	mm
6432700	169	115	220	200	1
	⊖ 680 4 5,5 6,5				
	⊕ 690 1 2				
	⊕ 690 PZD 1 2				
6432620	169 L	115	220	150	1

8 MM (5/16") HEXAGON SQUARE DRIVE
880
SCREWDRIVER BIT for slotted head screws

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-1
- Hexagon drive as per DIN 3126 - C 8 (5/16")
- GEDORE special vanadium steel, gun-metal finish



Code	No.	b	t	L	mm	mm
6566740	880 5,5	5.5	0.8	41	10	10
6566820	880 6,5	6.5	1.2	41	11	10
6566900	880 7	7.0	1.2	41	12	10
6567040	880 8	8.0	1.6	41	13	10




Code	No.	b	t	L	⚙️	🔧
6567120	880 9	9.0	1.6	41	13	10
6567200	880 10	10.0	1.6	41	20	10
6567390	880 12	12.0	2.0	41	23	10
6567470	880 14	14.0	2.5	41	26	10

885

SCREWDRIVER BIT for in-hex screws

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-3
- Hexagon drive as per DIN 3126 - C 8 (5/16")
- GEDORE special vanadium steel, gun-metal finish




Code	No.	mm	ISO 4762	DIN 7984	L	⚙️	🔧
6568010	885 3	3	M4	M5	30	6	10
6568280	885 4	4	M5	M6	30	9	10
6568360	885 5	5	M6	M8	30	10	10
6568440	885 6	6	M8	M10	30	10	10
6568520	885 8	8	M10	M12	30	14	10
6568600	885 10	10	M12	M14	30	21	10

890

SCREWDRIVER BIT for cross-slotted head screws PH

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-2, tip as per DIN ISO 8764-1 PH
- Hexagon drive as per DIN 3126 - C 8 (5/16")
- GEDORE special vanadium steel, gun-metal finish




Code	No.	PH	L	⚙️	🔧
6571580	890 1	1	32	9	10
6571660	890 2	2	32	10	10
6571740	890 3	3	32	10	10
6571820	890 4	4	32	15	10
6571900	890 4 L	4	38	16	10

890 PZD

SCREWDRIVER BIT for cross-slotted head screws PZ

- For hand operation and use in electric and air tools
- Acc. to DIN ISO 2351-2, tip as per DIN ISO 8764-1 PZ
- Hexagon drive as per DIN 3126 - C 8 (5/16")
- GEDORE special vanadium steel, gun-metal finish




Code	No.	PZ	L	⚙️	🔧
6553250	890 PZD 1	1	32	9	10
6553330	890 PZD 2	2	32	10	10
6553410	890 PZD 3	3	32	10	10
6553760	890 PZD 4	4	32	15	10

886

SCREWDRIVER BIT for multi-spline screws RIBE®

- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 8 (5/16")
- GEDORE special vanadium steel, gun-metal finish
- RIBE® is a registered trademark of Rich. Bergner




Code	No.	M	L	⚙️	🔧
6570340	886 4	M4	38	7	10
6570420	886 5	M5	38	9	10
6570500	886 6	M6	38	11	10
6570690	886 8	M8	38	18	10
6570770	886 10	M10	38	20	10
6570850	886 12	M12	38	22	10
6570930	886 14	M14	38	24	10

885 X

SCREWDRIVER BIT for multi-point screws XZN

- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 8 (5/16"), tip as per DIN 2325
- GEDORE special vanadium steel, gun-metal finish




Code	No.	M	L	⚙️	🔧
6569170	885 X 5	M5	28	8	10
6569250	885 X 6	M6	28	9	10
6569330	885 X 8	M8	28	10	10
6569410	885 X 10	M10	38	16	10
6569680	885 X 12	M12	38	25	10
6569760	885 X 14	M14	38	29	10

887 TX

SCREWDRIVER BIT for recessed TORX® head screws

- For hand operation and use in electric and air tools
- Hexagon drive as per DIN 3126 - C 8 (5/16")
- GEDORE special vanadium steel, gun-metal finish
- TORX® is a registered trademark of Acument Intellectual Properties, LLC. USA





Code	No.	T	M	L	⚙️	🔧
6571070	887 TX T27	T27	M4.5 - M6	4.99	35	10
6571150	887 TX T30	T30	M6 - M7	5.52	35	11
6571230	887 TX T40	T40	M7 - M8	6.65	35	12
6571310	887 TX T45	T45	M8 - M10	7.82	35	15
6575140	887 TX T50	T50	M10	8.83	35	15

KB 819 - KB 830

ADAPTOR PIECES for screwdriver bits

- Acc. to DIN 7427 Form A
- Hex recess D 8 (5/16") and square drive Form G DIN 3121
- For hand-operated or power tools
- For use in power tools, we recommend the use of a locking ring and pin
- * Length not standardised





Code	No.	*	Ø"	□"	L	⚙️	🔧
6563480	KB 819		5/16	1/2	35	65	5
6563560	KB 820	*	5/16	1/4	25	16	1
6563800	KB 830		5/16	3/8	30	45	1

870

BIT SCREWDRIVER

- Hex recess as per DIN 3126 - D 8 (5/16"), for bits
- Magnetic screw retainer
- GEDORE vanadium steel




Code	No.	Ø"	L ₁	L ₂	⚙️	🔧
6565500	870	5/16	210	100	185	1

871

BIT REVERSIBLE RATCHET

- With knurled head for quick starting or counter-holding of screws
- Hex recess as per DIN 3126 - D 8 (5/16")
- Slimline design for working in confined spaces



Code	No.	Ø"	∠°	mm	mm	⚙️	🔧
6535430	871	5/16	15	127	20.2	110	1

871-021

BIT SET 24 pieces

- Extra slim bit ratchet with most popular bit sizes
- For working in extremely confined spaces
- In plastic case, dimensions: 200 x 120 x 38 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	⚙️	🔧
6570180	871-021	720	1

871
 ○ **880** 5,5 6,5 8 10
 ● **885** 3 4 5 6 8
 ⊕ **890** 2 3
 ⊕ **890 PZD** 2 3 4
 ● **887 TX** T27 T30 T40 T45 T50
 ⇐ **872**